

TYRE CATALOGUE

TRUCK & BUS BIAS TYRES



GOODRIDE





TOP 9

No. 9 of Top 75 Global Tyre Manufacturers



SINCE 1958

Established in Year 1958


30000+

30,000 EMPLOYEES

Support from Over 30,000 Employees



200 MARKETS

Trust from Customers Across More than 200 Markets

Zhongce Rubber Group Co., Ltd (ZC-Rubber) is a global tyre company based in Hangzhou, China and was founded in 1958. Over our more than 60 years of history, we experienced continuous growth in quality and reputation to become the Top 10 tyre manufacturer worldwide today.

Our engineers with our international R&D team focus on constant technological development and innovation spending millions of US dollars in research and development each year and upgrading our production and testing facilities. The ET Industrial Brain in the production process promises our smart production and guarantee tyres with high quality, safety, and value with maximum efficiency.

We have formed an extensive global service network of about 1,200 distributors with 250,000 sales locations in 160 countries. Our subsidiaries in Thailand, Germany, Brazil, and the United States serve customers without any difference in time and language. We are dedicated to better support our suppliers, distributors, and customers through a one-stop service.

Safe and Value are always the key of our company. We take pride in the superior quality of our tyre products and the first-rate services. We are still endeavoring to become one of the most respected tyre manufacturers globally and craft a better future with all partners and friends.



Most Advanced
Equipment



Best
Raw Material



Leanest
Management



Latest
Technology



Least
Energy Consumption



Most Suitable
Products

COMPANY MISSION



WE ARE COMMITTED TO
ADVANCING TOWARDS
FUTURE MOBILITY

COMPANY VISION



TO BE A GLOBAL LEADING
TYRE MANUFACTURER



China Compulsory Certification



US DOT Certification



European E-MARK Certification



SNI Certification of Indonesia



BIS Certification of India



INMETRO Certification of Brazil



ZC-Rubber America Inc.



ZC-Rubber Mexico
(Under Planning)



ZC-Rubber Brasil Co. Ltd.



ZC-Rubber Europe Technical Center
ZC-Rubber Europe GmbH



ZC-Rubber Thailand Co. Ltd.



ZC-Rubber Indonesia
(Under Construction)




ZC-Rubber HQ
ZC-Rubber Tianjin
ZC-Rubber Chaoyang
ZC-Rubber Jiande
ZC-Rubber Qingquan
ZC-Rubber Yonggu
ZC-Rubber Anji
ZC-Rubber Jintan
ZC-Rubber Recycling
Tech. Co. Ltd.
Hangzhou ZC-Rubber
Auto Space Co. Ltd.

GOODRIDE



OFFICIAL TIRE OF ARSENAL FOOTBALL CLUB

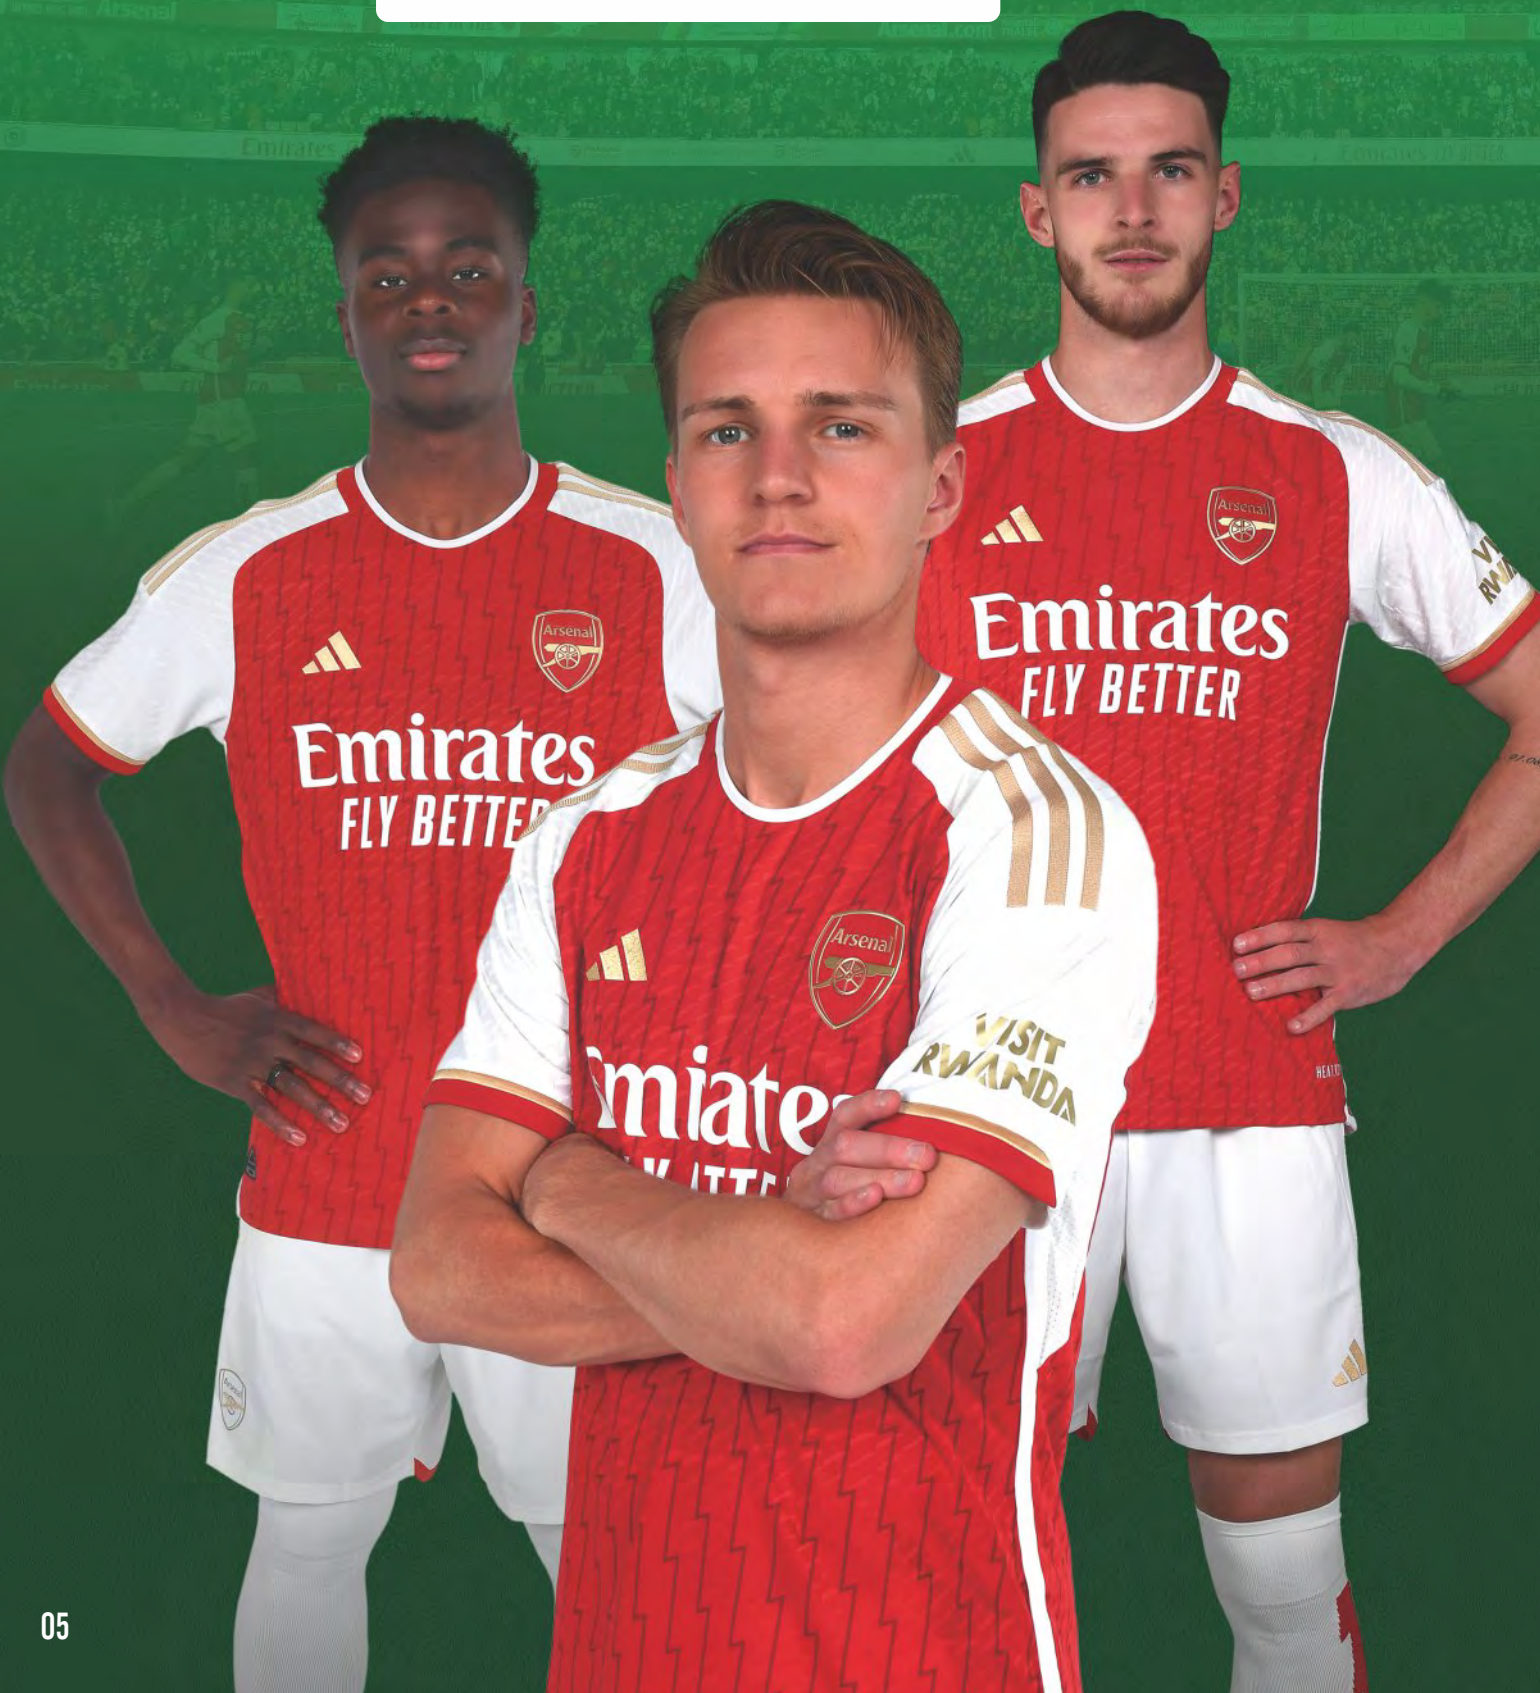

OE CUSTOMERS



KEY ACCOUNTS



KEY SUPPLIERS



CONTENTS

TRUCK & BUS BIAS TYRES

Medium & Heavy Truck Bias
..... 09 - 17

Light Truck Bias 18 - 29

Light Truck Nylon Radial
..... 30 - 31



Medium & Heavy Truck Bias



CR992/H

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
7.50-20	14	130/126J	15.5	6.0	215	935	1900	810	1700	740
8.25-20	14	136/131G	16.5	6.5	236	974	2240	810	1950	740
9.00-20	16	145/140G	15.0	7.0	259	1018	2900	880	2500	810
10.00-20	16	146/142G	16.0	7.5	278	1055	3000	810	2650	740
CR992H 10.00-20	16	146/142G	19.0	7.5	278	1073	3000	810	2650	740
11.00-20	18	153/148G	16.0	8.0	293	1085	3650	910	3150	840
12.00-20	18	154/150G	16.0	8.5	315	1125	3750	810	3350	740



R9038

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
10.00-20	16	146/142G	17.0	7.5	278	1055	3000	810	2650	740





CR952

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
9.00-20	16	145/140G	17.5	7.0	259	1038	2900	880	2500	810
10.00-20	16	146/142G	19.0	7.5	278	1073	3000	810	2650	740
10.00-20	18	150/145G	19.0	7.5	278	1073	3350	910	2900	840
11.00-20	16	150/145G	19.0	8.0	293	1105	3350	810	2900	740
11.00-20	18	153/148G	19.0	8.0	293	1105	3650	910	3150	840



CR942

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
8.25-20	14	136/131G	14.0	6.5	236	974	2240	810	1950	740
8.25-20	16	139/135G	14.0	6.5	236	974	2430	910	2180	840
9.00-20	14	141/137K	14.0	7.0	259	1018	2575	770	2300	700
9.00-20	16	145/140G	14.0	7.0	259	1018	2900	880	2500	810
10.00-20	16	146/142G	15.0	7.5	278	1055	3000	810	2650	740



M9088

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
10.00-20	16	146/142G	21.6	7.5	278	1073	3000	810	2650	740
10.00-20	18+	150/145G	21.6	7.5	278	1073	3350	910	2900	840
11.00-20	18	153/148G	22.0	8.0	293	1105	3650	910	3150	840
11.00-20	18+	153/148G	22.0	8.0	293	1105	3650	910	3150	840
12.00-20	20	156/151G	22.0	8.5	315	1125	4000	880	3450	810
14.00-20	20	164/159F	21.0	10.0	375	1240	5000	770	4375	700



M9093

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
8.25-20	16	139/135G	20.0	6.5	236	992	2430	910	2180	840
9.00-20	16	145/140G	23.0	7.0	259	1038	2900	880	2500	810
10.00-20	16	146/142G	26.0	7.5	278	1073	3000	810	2650	740





CL956

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
9.00-20	16	145/140G	20.0	7.0	259	1038	2900	880	2500	810
10.00-20	16	146/142G	22.0	7.5	278	1073	3000	810	2650	740
10.00-20	18	150/145G	22.0	7.5	278	1073	3350	910	2900	840
11.00-20	16	150/145G	22.0	8.0	293	1105	3350	810	2900	740
11.00-20	18	153/148G	22.0	8.0	293	1105	3650	910	3150	840
12.00-20	18	154/150G	22.5	8.5	315	1145	3750	810	3350	740



CL946

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
9.00-20	14	141/137G	16.0	7.0	259	1018	2575	770	2300	700
9.00-20	16	145/140G	16.0	7.0	259	1018	2900	880	2500	810
10.00-20	16	146/142G	17.0	7.5	278	1055	3000	810	2650	740
11.00-20	16	150/145G	17.0	8.0	293	1085	3350	810	2900	740
11.00-20	18	153/148G	17.0	8.0	293	1085	3650	910	3150	840
12.00-20	18	154/150G	18.0	8.5	315	1125	3750	810	3350	740
12.00-20	20	156/151G	18.0	8.5	315	1125	4000	880	3450	810



CL939/A/B

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
9.00-20	16	145/140C	18.0	7.0	259	1018	2900	880	2500	810
10.00-20	16	146/142C	19.0	7.5	278	1055	3000	810	2650	740
11.00-20	18	153/148C	20.0	8.0	293	1085	3650	910	3150	840
CL939A 8.25-20	14	136/131C	17.0	6.5	236	974	2240	810	1950	740
CL939A 9.00-20	16	145/140C	18.0	7.0	259	1038	2900	880	2500	810
CL939A 10.00-20	16	146/142C	19.0	7.5	278	1055	3000	810	2650	740
CL939A 11.00-20	18	153/148C	20.0	8.0	293	1085	3650	910	3150	840
CL939A 12.00-20	18	154/150C	22.0	8.5	315	1125	3750	810	3350	740
CL939B 9.00-20	16	145/140G	18.0	7.0	259	1018	2900	880	2500	810
CL939B 10.00-20	16	146/142G	19.0	7.5	278	1055	3000	810	2650	740
CL939B 11.00-20	18	153/148G	21.0	8.0	293	1085	3650	910	3150	840
CL939B 10.00-20	16	146/142G	19.0	7.5	278	1055	3000	810	2650	740



CL951

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
7.00-20	14	127/123G	13.0	5.5	200	904	1750	840	1550	770
7.50-20	14	130/126J	14.0	6.0	215	935	1900	810	1700	740
8.25-20	14	136/131J	14.0	6.5	236	974	2240	810	1950	740
9.00-20	16	145/140G	16.0	7.0	259	1018	2900	880	2500	810
10.00-20	16	146/142G	16.0	7.5	278	1055	3000	810	2650	740
11.00-20	18	153/148G	17.0	8.0	293	1085	3650	910	3150	840
12.00-20	18	154/150G	17.5	8.5	315	1125	3750	810	3350	740
13.00-20	18	158/154F	19.0	9.0	340	1177	4250	770	3750	700
12.00-24	18	158/154G	17.5	8.5	315	1225	4250	810	3750	740





CL910

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
9.00-20	16	145/140G	14.5	7.0	259	1018	2900	880	2500	810
10.00-20	16	146/142G	15.0	7.5	278	1055	3000	810	2650	740
11.00-20	18	153/148G	16.0	8.0	293	1085	3650	910	3150	840
12.00-20	18	154/150G	16.0	8.5	315	1125	3750	810	3350	740



CL991

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
8.25-20	16+	139/135B	22.0	6.5	236	992	2430	910	2180	840
9.00-20	16	145/140B	25.0	7.0	259	1038	2900	880	2500	810
9.00-20	18	147/142B	25.0	7.0	259	1038	3105	990	2695	920
10.00-20	16	146/142B	28.0	7.5	278	1073	3000	810	2650	740
10.00-20	18	150/145B	28.0	7.5	278	1073	3350	910	2900	840
11.00-20	16	150/145B	30.0	8.0	293	1105	3350	810	2900	740
11.00-20	18	153/148B	30.0	8.0	293	1105	3650	910	3150	840
12.00-20	18	154/150B	30.0	8.5	315	1145	3750	810	3350	740
12.00-20	20	156/151B	30.0	8.5	315	1145	4000	880	3450	810



CL969

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
11.00-20	18	153/148G	23.0	8.0	293	1105	3650	910	3150	840
11.00-20	20	155/150B	23.0	8.0	293	1105	3875	1010	3350	940
12.00-20	18	154/150G	23.0	8.5	315	1145	3750	810	3350	740
12.00-20	20	156/151B	23.0	8.5	315	1145	4000	880	3450	810
12.00-24	18	158/154G	23.0	8.5	315	1225	4250	810	3750	740
12.00-24	20	160/156G	23.0	8.5	315	1225	4500	880	4000	810



CL710/CL711

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
12.00-24	20	160/156G	35.0	8.5	315	1247	4500	880	4000	810
12.00-24	20	160/156G	35.0	8.5	315	1247	4500	880	4000	810



Light Truck Bias



CR918

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
10.00-20	12	140/135	11.0	7.5	278	1055	2500	590	2180	520
10.00-20	14	144/139	11.0	7.5	278	1055	2800	690	2430	620
11-22.5	12	140/135	10.3	8.25	279	1054	2500	590	2180	520
11-22.5	14	144/139	10.3	8.25	279	1054	2800	690	2430	620



CR940

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
11.00-22	16	152/147G	15.0	8.0	293	1135	3550	810	3075	740





R8019

 Made in Thailand only

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
6.50-15LT	12	109/105K	11.5	4.50E	180	730	1030	630	925	630
6.50-15LT	14	113/108K	11.5	4.50E	180	730	1150	730	1000	730
7.00-16LT	14	118/114L	13.0	5.50F	200	775	1320	730	1180	730



M8057/M8057+

 Made in Thailand only

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
6.00-13LT	12	101/97J	12.5	4.50B	170	655	825	630	730	630
6.00-13LT	14	105/100J	12.5	4.50B	170	655	925	730	800	730
6.50-15LT	12	109/105J	13.5	4.50E	180	730	1030	630	925	630
6.50-15LT	14	113/108J	13.5	4.50E	180	730	1150	730	1000	730
7.00-16LT	14	118/114J	16.0	5.50F	200	775	1320	730	1180	730
7.00-16LT	16	119/115J	16.0	5.50F	200	775	1360	770	1215	770
M8057+ 5.50-13	14	106/104K	13.0	4.50B	170	655	950	730	900	730



M8085

 Made in Thailand only

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
35 × 12.50-15LT	8	121L	18.0	10.00	320	900	1450	310	/	310
35 × 12.50-16LT	8	120L	18.0	10.00	320	900	1400	310	/	310



CR892

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
6.50-15LT	8+	101/97L	10.7	4.50E	180	730	825	420	730	420
7.00-15LT	10	109/105L	13.0	5.50F	200	750	1030	530	925	530
6.50-16LT	12	110/105L	10.0	5.50F	185	750	1060	630	925	630
7.00-16LT	12	115/110L	13.0	5.50F	200	775	1320	630	1180	630
7.50-16LT	14	122/118K	13.8	6.00G	215	805	1500	730	1320	730
8.25-16LT	14	126/122J	14.3	6.50H	235	855	1700	630	1500	630





CR852

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
							(kg)	(kPa)	(kg)	(kPa)
6.50-14LT	8+	99/95L	8.0/9.5	4 1/2J	180	705	775	420	690	420
6.50-14LT	10	104/100L	8.0/9.5	4 1/2J	180	705	900	530	800	530
7.50-15LT	12	119/115L	10.5	6.00G	215	780	1360	630	1215	630
7.50-16LT	14	122/118K	13.5	6.00G	215	816	1500	730	1320	730
7.50-16LT	16	124/120K	13.5	6.00G	215	816	1580	730	1390	730
8.25-16LT	14	126/122K	11.5	6.50H	235	855	1700	630	1500	630



R8038

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
							(kg)	(kPa)	(kg)	(kPa)
7.50-16LT	14	122/118K	13.5	5.50F	215	816	1500	730	1320	730



R8018

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
							(kg)	(kPa)	(kg)	(kPa)
5.00-12ULT	8	83/81L	8.5	3.50B	143	568	487	400	462	400
6.00-13LT	8	93/89L	10.0	4.50B	170	655	650	420	580	420
6.00-14LT	10	100/96L	9.0	4 1/2J	170	680	800	530	710	530
6.00-15LT	10	101/97L	11.0	4.50E	170	705	825	530	730	530
6.00-16LT	10	102/98L	10.0	4.50E	170	730	860	530	750	530
7.00-16LT	12	115/110L	13.0	5.50F	200	775	1215	630	1060	630



CR832

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
							(kg)	(kPa)	(kg)	(kPa)
6.00-14LT	8	95/90L	7.5	4 1/2J	170	680	690	420	600	420
6.00-14LT	8	95/90L	9.5	4 1/2J	170	680	690	420	600	420
6.00-15LT	10	101/97L	8.0	4.50E	170	705	825	530	730	530
6.50-15LT	10	106/101L	8.5	4.50E	180	730	950	530	825	530
7.00-15LT	10	109/105L	10.0	5.50F	200	750	1030	530	935	530
7.00-15LT	12	113/109L	10.0	5.50F	200	750	1150	630	1030	630
6.50-16LT	10	107/103L	10.0	5.50F	185	750	975	530	875	530
6.50-16LT	12	110/105L	10.0	5.50F	185	750	1060	630	925	630
7.00-16LT	10	111/106L	10.5	5.50F	200	775	1090	530	950	530
7.00-16LT	12	115/110L	10.5	5.50F	200	775	1215	630	1060	630
7.00-16LT	14	118/114L	10.5	5.50F	200	775	1320	730	1180	730
7.50-16LT	10	116/112L	10.0	6.00G	215	805	1250	530	1120	530
7.50-16LT	12	120/116L	10.0	6.00G	215	805	1400	630	1250	630
7.50-16LT	12+	120/116L	10.0	6.00G	215	805	1400	630	1250	630
7.50-16LT	14	122/118G	10.0	6.00G	215	805	1500	730	1320	730





M8086

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
7.50-16LT	10	116/112L	18	6.00G	215	805	1250	530	1120	530
7.50-16LT	14	122/118G	18	6.00G	215	805	1500	730	1320	730
7.50-16LT	16	124/120G	18	6.00G	215	816	1580	760	1390	760



M8089

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
7.50-16LT	8	112/107E	19.5	6.00G	215	805	1120	420	975	420
7.50-16LT	10	116/112E	19.5	6.00G	215	805	1250	530	1120	530



CL827

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
6.50-14LT	10	104/100L	11.0	4 1/2J	180	705	900	530	800	530
7.50-15LT	12	119/115L	12.0	6.00G	215	780	1360	630	1215	630
6.00-16LT	8	98/94L	10.0	4.50E	170	730	750	420	670	420
6.00-16LT	10	102/98L	10.0	4.50E	170	730	860	530	750	530
6.50-16LT	10	107/103L	10.0	5.50F	185	750	975	530	875	530
6.50-16LT	12	110/105L	10.0	5.50F	185	750	1060	630	925	630
7.00-16LT	10	111/106L	12.0	5.50F	200	775	1090	530	950	530
7.00-16LT	12	115/110L	12.0	5.50F	200	775	1215	630	1060	630
7.00-16LT	14	118/114L	12.0	5.50F	200	775	1320	730	1180	730
7.50-16LT	12	120/116L	13.0	6.00G	215	805	1400	630	1250	630
7.50-16LT	14	122/118G	13.0	6.00G	215	805	1500	730	1320	730
8.25-16LT	14	126/122L	14.0	6.50H	235	855	1700	630	1500	630



CL851

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
7.00-15LT	12	113/109L	11.0	5.50F	200	750	1150	630	1030	630
6.50-16LT	12	110/105K	10.0	5.50F	185	750	1060	630	925	630
7.00-16LT	14+	118/114L	11.0	5.50F	200	775	1320	730	1180	730
7.00-16LT	14+	118/114L	11.0	5.50F	200	775	1320	730	1180	730
7.50-16LT	14	122/118K	12.5	6.00G	215	805	1500	730	1320	730
7.50-16LT	14	122/118G	12.5	6.00G	215	805	1500	730	1320	730
7.50-16LT	14+	122/118G	12.5	6.00G	215	805	1500	730	1320	730
8.25-16LT	16	128/124G	14.0	6.50H	235	855	1800	730	1600	730





CL839/CL839A

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
7.00-15LT	10	109/105L	9.5	5.50F	200	750	1030	530	935	530
7.00-15LT	12	113/109L	9.5	5.50F	200	750	1150	630	1030	630
6.50-16LT	12	110/105E	12.5	5.50F	185	750	1060	630	925	630
7.00-16LT	14	118/114E	14.0	5.50F	200	775	1215	730	1060	730
7.50-16LT	14	122/118E	15.0	6.00G	215	805	1500	730	1320	730
8.25-16LT	16	128/124E	15.0	6.50H	235	867	1800	730	1600	730
9.00-16	14	131/126E	16.0	6.50H	255	890	1950	630	1700	630
9.00-16LT	14	131/126E	16.0	6.50H	255	890	1950	630	1700	630



M8093

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
6.50-16LT	14	110/105E	13.5	5.50F	185	750	1060	630	925	630
7.00-16LT	14	118/114E	14.0	5.50F	200	775	1320	730	1180	730
7.50-16LT	16	125/121D	16.0	6.00G	215	816	1500	730	1320	730
8.25-16LT	16	128/124B	17.0	6.50H	235	867	1800	730	1600	730



CL891

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
6.50-16LT	12	110/105B	18.0	5.50F	185	761	1060	630	925	630
7.00-16LT	14	118/114B	18.0	5.50F	200	785	1320	730	1180	730
7.50-16LT	14	122/118B	18.0	6.00G	215	816	1500	730	1320	730
8.25-16LT	16	128/124B	19.0	6.50H	235	867	1800	730	1600	730



M8080

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
7.50-16LT	14★★	128/124B	23.0	6.00G	215	816	1500	730	1320	730
8.25-16LT	16★★	128/124B	25.0	6.50H	235	867	1800	730	1600	730
9.00-16	16	134/129B	25.0	6.50H	255	902	2120	730	1850	730





CR821

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
5.50-13LT	8	88/84L	9.0	4.00B	160	620	565	420	500	420



CR850

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
4.50-12ULT	8	77/76L	8.0	3.00B	127	545	412	400	400	400
5.00-12ULT	8	83/81L	8.5	3.50B	143	568	487	400	462	400
5.00-12ULT	10	88/86L	8.5	3.50B	143	568	560	500	530	500
6.00-13LT	8+	93/89L	10.0	4.50B	170	655	650	420	580	420
6.00-14LT	8	95/90L	9.0	4 1/2J	170	680	690	420	600	420
6.00-14LT	10	100/96L	9.0	4 1/2J	170	680	800	530	710	530
6.00-15LT	10	101/97L	11.0	4.50E	170	705	825	530	730	530



M8088

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
4.50-12ULT	8	77/76L	8.5	3.00B	127	545	412	400	400	400
5.00-12ULT	10	88/86L	9.2	3.50B	143	568	560	500	530	500
6.00-13LT	8+	93/89L	10.0	4.50B	170	655	650	420	580	420
6.00-14LT	10	100/96L	10.8	4 1/2J	170	680	800	530	710	530



L8056

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
5.50-13LT	14	104/100K	13.0	4.00B	160	620	900	730	800	730
L8056+ 5.50-13LT	14	106/104K	15.0	4.50B	170	655	950	730	900	730
6.00-13LT	8+	93/89G	15.0	4.50B	170	655	650	420	580	420
6.00-14LT	10	100/96G	15.0	4 1/2J	170	680	800	530	710	530
6.00-15LT	10	101/97G	15.0	4.50E	170	705	825	530	730	530
6.50-15LT	10+	106/101G	15.5	4.50E	180	730	950	530	825	530
6.50-16LT	12+	110/105G	19.0	5.50F	185	750	1060	630	925	630
7.00-16LT	14+	118/114G	19.0	5.50F	200	775	1320	730	1180	730
8.25-16LT	16+	128/124E	19.5	6.50H	235	855	1800	730	1600	730



Light Truck Nylon Radial



L8058

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
5.00-12ULT	10	88/86L	9.0	3.50B	143	568	560	500	530	500
5.50-13LT	8+	88/84L	10.0	4.00B	160	620	565	420	500	420
6.00-13LT	8+	93/89L	10.0	4.50B	170	655	650	420	580	420
6.00-14LT	10	100/96L	10.0	4 1/2J	170	680	800	530	710	530
6.00-15LT	10	101/97L	11.0	4.50E	170	705	825	530	730	530
6.50-15LT	10	106/101L	10.0	4.50E	180	730	950	530	825	530
6.00-16LT	10	102/98L	10.0	4.50E	170	730	860	530	750	530



CL856

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width (mm)	Overall Diameter (mm)	Single		Dual	
7.50-16LT	16	125/121K	18.0	6.00G	215	816	1650	830	1450	830





CR808

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width	Overall Diameter	Single		Dual	
					(mm)	(mm)	(kg)	(kPa)	(kg)	(kPa)
5.00R12ULT	10	88/86L	8.5	3.50B	143	568	560	530	530	530
5.50R13LT	8	88/84L	8.5	4.00B	160	620	560	450	500	450
6.00R13LT	8++	93/89L	9.0	4.50B	170	655	650	450	580	450
4.50R14	8	81L	8.0	3.00D	122	605	460	450	/	450
5.00R14	10	89L	8.5	3.00D	130	625	590	560	/	560
6.00R14LT	8++	95/90L	9.0	4 1/2J	170	680	690	450	600	450
6.00R15LT	8++	97/92L	9.0	4.50E	170	705	730	460	630	460
6.50R15LT	10	106/101L	9.5	5.50F	185	730	950	560	825	560
7.00R15LT	12	113/109L	11.0	5.50F	200	750	1150	670	1030	670
6.00R16LT	10	102/98L	9.0	4.50E	170	730	850	560	750	560
6.50R16LT	12	110/105L	8.5	5.50F	185	750	1060	670	925	670
7.00R16LT	14	118/114L	9.0	5.50F	200	775	1320	770	1180	770



CR808A

Size	Ply	Service Index	Tread Depth (mm)	Standard Rim	Inflated Profile		Max. Load Capacity at Cold Inflation Pressure			
					Section Width	Overall Diameter	Single		Dual	
							(mm)	(mm)	(kg)	(kPa)
6.50R16LT	12	110/105L	10.2	5.50F	185	750	1060	670	925	670
7.00R16LT	14	118/114L	11.0	5.50F	200	775	1320	770	1180	770
7.50R16LT	14	122/118L	12.8	6.00G	215	805	1500	770	1320	770



GOODRIDE



www.goodridetire.com



www.facebook.com/goodridetireglobal



ZHONGCE RUBBER GROUP CO., LTD.



www.zc-rubber.com



facebook.com/zcrubber



twitter.com/zc_rubber



linkedin.com/company/zcrubber