

TYRE CATALOGUE

Passenger Car, SUV and Light Truck



GOODRIDE

EU Version





TOP 9
No. 9 of Top 75 Global Tyre Manufacturers

SINCE 1958
Established in Year 1958

30,000 EMPLOYEES
Support from Over 30,000 Employees

200 MARKETS
Trust from Customers Across More than 200 Markets

Zhongce Rubber Group Co., Ltd (ZC-Rubber) is a global tyre company based in Hangzhou, China and was founded in 1958. Over our more than 60 years of history, we experienced continuous growth in quality and reputation to become the Top 10 tyre manufacturer worldwide today.

Our engineers with our international R&D team focus on constant technological development and innovation spending millions of US dollars in research and development each year and upgrading our production and testing facilities. The ET Industrial Brain in the production process promises our smart production and guarantee tyres with high quality, safety, and value with maximum efficiency.

We have formed an extensive global service network of about 1,200 distributors with 250,000 sales locations in 160 countries. Our subsidiaries in Thailand, Germany, Brazil, and the United States serve customers without any difference in time and language. We are dedicated to better support our suppliers, distributors, and customers through a one-stop service.

Safe and Value are always the key of our company. We take pride in the superior quality of our tyre products and the first-rate services. We are still endeavoring to become one of the most respected tyre manufacturers globally and craft a better future with all partners and friends.


Most Advanced
Equipment


Best
Raw Material


Leanest
Management


Latest
Technology


Least
Energy Consumption


Most Suitable
Products

COMPANY MISSION


**WE ARE COMMITTED TO
ADVANCING TOWARDS
FUTURE MOBILITY**

COMPANY VISION


**TO BE A GLOBAL LEADING
TYRE MANUFACTURER**



China Compulsory Certification



US DOT Certification



European E-MARK Certification



SNI Certification of Indonesia



BIS Certification of India



INMETRO Certification of Brazil



STRATEGIC COOPERATION



GOODRIDE



OFFICIAL TIRE OF ARSENAL FOOTBALL CLUB

ALWAYS MOVING FORWARD

Passenger Car, SUV and Light Truck Tyres

GOODRIDE

OE CUSTOMERS



KEY ACCOUNTS



KEY SUPPLIERS



GOODRIDE CONTENTS

Passenger Car, SUV and Light Truck Tyres

ULTRA HIGH PERFORMANCE (UHP)

RS/RSII DSII SOLMAX 1 (ZRT) SOLMAX 1 SA-37 SA-57

09-20

PASSENGER

Z-107

21-22

SUV / LTR

SOLMAX 1 SU318 SL369 SL399 SL366 SL378

23-34

COMMERCIAL LTR

SC328 H188

35-38

ALL SEASON

Z-401 SW613

39-42

WINTER

Z-507 SW608 SW628 SW618 SW612 Z-506 SW606

43-56

TRAILER

TRAILER ST290

57-58

TECHNICAL INFORMATION

59-77

EU TYRE LABEL

78

TYRE KNOWLEDGE

79-85


SPORT RS

SPORT RS



Benefits and Features

- Ideal drifting tyre with special design and components based on competition experiences
- Asymmetric tread design with big pattern blocks and special compound provides superior grip ability
- Continuous center rib generates better grip in dry conditions and enhances high-speed stability



Rim Size	15 - 20
Series	30 - 50
Speed Rating	V - W

Rim (inch)	Size	Service Index	Standard Rim	Wet Grip	Wear	Rolling Noise	Rim (inch)	Size	Service Index	Standard Rim	Wet Grip	Wear	Rolling Noise	
15"	195/50R15 RS	82V	6.0J	/	/	/	18"	285/35ZR18 XL RS RS II	101W	10.0J	/	/	/	
	205/50R15 XL RS	89V	6.5J	/	/	/		225/40ZR18 XL RS	92W	8.0J	/	/	/	
16"	205/45ZR16 XL RS	87W	7.0J	/	/	/	235/40ZR18 XL RS RS II	95W	8.5J	/	/	/	/	
	225/50R16 XL RS	96W	7.0J	/	/	/	19"	275/30ZR19 XL RS	96W	9.5J	/	/	/	/
17"	235/40ZR17 RS	90W	8.5J	/	/	/	235/35ZR19 XL RS	91W	8.5J	/	/	/	/	
	245/40ZR17 XL RS	95W	8.5J	/	/	/	285/35ZR19 XL RS	103W	10.0J	/	/	/	/	
	215/45ZR17 RS	87W	7.0J	/	/	/	20"	275/35ZR20 XL RS II	102W	9.5J	/	/	/	/
	225/45ZR17 XL RS	94W	7.5J	/	/	/	285/35ZR20 XL RS RS II	104W	10.0J	/	/	/	/	
18"	235/45ZR17 RS	94W	8.0J	/	/	/	255/40ZR20 XL RS RS II	101W	9.0J	/	/	/	/	
	265/35ZR18 XL RS RS II	97W	9.5J	/	/	/								



SPORT DS II



Benefits and Features

- Ideal drifting tyre with special design and components based on competition experiences
- Directional pattern design provides outstanding handling and superior grip ability
- Continuous center rib generates better grip in dry conditions and enhances high-speed stability



Rim Size	17 - 18
Series	35 - 45
Speed Rating	W

SPORT DS II

Rim (inch)	Size	Service Index	Standard Rim	🔋	☁️	🔊	Rim (inch)	Size	Service Index	Standard Rim	🔋	☁️	🔊
17"	245/40ZR17 XL	95W	8.5J	/	/	/	18"	255/35ZR18 XL	94W	9.0J	/	/	/
	255/40ZR17 XL	98W	9.0J	/	/	/		265/35ZR18 XL	97W	9.5J	/	/	/
	225/45ZR17 XL	94W	7.5J	/	/	/		235/40ZR18 XL	95W	8.5J	/	/	/




SOLMAX1 **2RT**



Benefits and Features

ZC Rubber RunFlat Tyres (**2RT**)

- ADVANCED CARCASS STRUCTURE**
Enhance the tyre body and avoid possible tyre failure during low pressure driving
- SPECIAL REINFORCED SIDEWALL CONSTRUCTION**
Supporting the tyres even if the air pressure dropped to zero
- ZC Rubber first generation RunFlat tyres with extraordinary performance in low air pressure situation

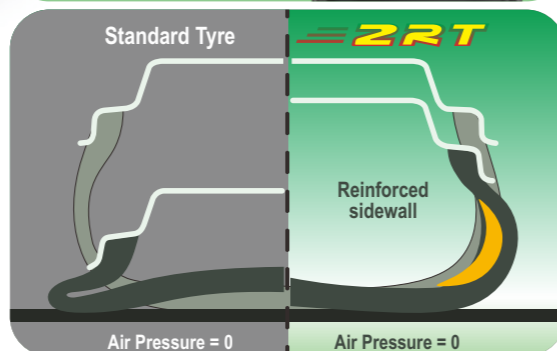

Hybrid Silane
(Driving Comfort)



Hybrid Formula
(Strong Grip)



BPOT Technology
(Improved Durability)

SOLMAX1 **2RT**

Rim (inch)	Size	Service Index	Standard Rim	W	S	T	YdB	Rim (inch)	Size	Service Index	Standard Rim	W	S	T	YdB	
17"	205/45R17 XL	88W	7.0J	D	B	72/B		19"	235/45R19 XL	99W	8.0J	D	B	72/B		
	225/45R17 XL	94W	7.5J	D	B	72/B			245/45R19	98W	8.0J	D	B	71/B		
	255/45R17 XL	102W	8.5J	D	B	73/B			245/50R19 XL	105W	7.5J	D	B	72/B		
	205/50R17 XL	93W	6.5J	D	B	72/B			255/50R19 XL	107W	8.0J	D	B	73/B		
	225/50R17 XL	98W	7.0J	D	B	72/B			235/55R19 XL	105V	7.5J	D	B	72/B		
	205/55R17 XL	95W	6.5J	D	B	72/B			20"	275/30R20	97W	9.5J	D	B	72/B	
	225/55R17 XL	101W	7.0J	D	B	72/B				245/35R20	95W	8.5J	D	B	71/B	
18"	255/35R18 XL	94W	9.0J	D	B	73/B		275/35R20 XL		102W	9.5J	D	B	73/B		
	225/40R18 XL	92W	8.0J	D	B	72/B		315/35R20 XL		110W	11.0J	D	B	75/B		
	235/40R18	91W	8.5J	D	B	72/B		325/35R20		108W	11.5J	D	B	74/B		
	245/40R18 XL	97W	8.5J	D	B	72/B		245/40R20 XL	99W	8.5J	D	B	72/B			
	255/40R18 XL	99W	9.0J	D	B	73/B		275/40R20 XL	106W	9.5J	D	B	73/B			
	275/40R18 XL	103W	9.5J	D	B	73/B		285/40R20	104W	10.0J	D	B	74/B			
	225/45R18 XL	95W	7.5J	D	B	72/B		305/40R20 XL	112W	11.0J	D	B	75/B			
245/45R18 XL	100W	8.0J	D	B	72/B		245/45R20 XL	103W	8.0J	D	B	72/B				
255/45R18 XL	103W	8.5J	D	B	73/B		255/45R20 XL	105W	8.5J	D	B	73/B				
225/50R18 XL	99W	7.0J	D	B	72/B		275/45R20 XL	110W	9.0J	D	B	73/B				
235/50R18 XL	101V	7.5J	D	B	72/B		21"	275/30R21 XL	98W	9.5J	D	B	73/B			
245/50R18 XL	104W	7.5J	D	B	72/B			325/30R21 XL	108W	11.5J	D	B	75/B			
235/55R18 XL	104V	7.5J	D	B	72/B			245/35R21 XL	96W	8.5J	D	B	72/B			
255/55R18 XL	109W	8.0J	D	B	73/B			275/35R21 XL	103W	9.5J	D	B	73/B			
19"	285/30R19 XL	98W	10.0J	D	B	75/B			285/35R21 XL	105W	10.0J	D	B	75/B		
	245/35R19 XL	93W	8.5J	D	B	72/B			315/35R21 XL	111W	11.0J	D	B	75/B		
	255/35R19 XL	96W	9.0J	D	B	73/B			245/40R21 XL	100W	8.5J	D	B	72/B		
	275/35R19 XL	100W	9.5J	D	B	73/B		275/40R21 XL	107W	9.5J	D	B	73/B			
	225/40R19 XL	93W	8.0J	D	B	72/B		285/45R21 XL	113W	9.5J	D	B	75/B			
	245/40R19 XL	98W	8.5J	D	B	72/B		22"	315/30R22 XL	107W	11.0J	D	B	75/B		
	255/40R19 XL	100W	9.0J	D	B	73/B			275/35R22 XL	104W	9.5J	D	B	73/B		
275/40R19	101W	9.5J	D	B	72/B		315/35R22 XL		111W	11.0J	D	B	75/B			
225/45R19 XL	96W	7.5J	D	B	72/B		275/40R22 XL		107W	9.5J	D	B	73/B			



Rim Size	17 - 22
Series	30 - 55
Speed Rating	V - W

SOLMAX 1



Benefits and Features


Variable-pitch noise-reduction pattern blocks, sound-bolts in 4 circumferential grooves, and the staggered arrangement of inner and outer lateral grooves to provide consumers with a more comfortable driving experience.

Hybrid Silane patent to optimize the tread compound and absorb road vibration effectively to further improved consumer's driving and experience

The patented Nanometer Mixing-Technology and High saturation pattern design, provide tyres with better wear resistance and increased mileage.

Driving Comfort

Hybrid Silane™ to optimize tread rubber compound
Soft Tread Compound and Minimized Vibration

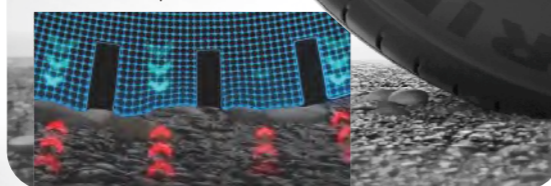


Strong Grip

Hybrid Formula™ - Super hybrid rubber compound Fast water drainage and strong grip



Improved Durability

Nanometer Mixing-Technology™ for longer mileage

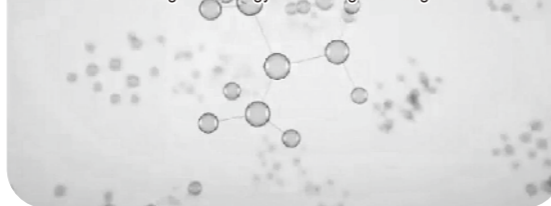

Hybrid Silane
(Driving Comfort)



Hybrid Formula
(Strong Grip)



BPOT Technology
(Improved Durability)

Rim Size 17 - 22

Series 30 - 55

Speed Rating V - Y

SOLMAX 1


Rim (inch)	Size	Service Index	Standard Rim	EV	EV	EV	Rim (inch)	Size	Service Index	Standard Rim	EV	EV	EV	
17"	215/45ZR17 XL	91Y	7.0J	D	A	72/B	20"	295/35ZR20 XL	105Y	10.5J	C	A	75/B	
	225/45ZR17 XL	94Y	7.5J	C	A	72/B		255/30ZR20 XL	92Y	9.0J	D	A	73/B	
	235/45ZR17 XL	97Y	8.0J	C	A	72/B		265/30ZR20 XL	94Y	9.5J	D	A	73/B	
	245/45ZR17 XL	99Y	8.0J	C	A	72/B		275/30ZR20 XL	97Y	9.5J	D	A	73/B	
	255/45ZR17	98Y	8.5J	C	A	72/B		235/35ZR20 XL EV	92Y	8.5J	C	A	72/B	
	205/50R17 XL	93W	6.5J	C	A	72/B		255/35ZR20 XL	97Y	9.0J	D	A	73/B	
	215/50R17	91W	7.0J	D	A	71/B		265/35ZR20 XL	99Y	9.5J	D	A	73/B	
	225/50R17 XL	98W	7.0J	C	A	72/B		275/35ZR20 XL	102Y	9.5J	C	A	73/B	
	235/50R17	96W	7.5J	C	A	71/B		285/35ZR20 XL	104Y	10.0J	C	A	75/B	
	215/55R17 XL	98W	7.0J	C	A	72/B		315/35ZR20 XL	110Y	11.0J	C	A	75/B	
	225/55R17 XL	101W	7.0J	C	A	72/B		245/40ZR20 XL	99Y	8.5J	C	A	72/B	
	235/55R17 XL	103W	7.5J	C	A	72/B		255/40ZR20 XL EV	101Y	9.0J	C	A	73/B	
	18"	255/35ZR18 XL	94Y	9.0J	D	A		73/B	265/40ZR20 XL	104Y	9.5J	C	A	73/B
		225/40ZR18 XL	92Y	8.0J	D	A		72/B	275/40ZR20 XL	106Y	9.5J	C	A	73/B
235/40ZR18 XL		95Y	8.5J	D	A	72/B	285/40ZR20 XL EV	108Y	10.0J	B	A	75/B		
245/40ZR18 XL		97Y	8.5J	D	A	72/B	295/40ZR20 XL	110Y	10.5J	C	A	75/B		
255/40ZR18 XL		99Y	9.0J	C	A	73/B	305/40ZR20 XL	112Y	11.0J	C	A	75/B		
265/40ZR18 XL		101Y	9.5J	C	A	73/B	235/45ZR20 XL	100Y	8.0J	C	A	72/B		
215/45ZR18 XL		95Y	7.5J	C	A	72/B	245/45ZR20 XL EV	103W	8.0J	B	A	72/B		
235/45ZR18 XL EV		98Y	8.0J	C	A	72/B	255/45ZR20 XL EV	105Y	8.5J	B	A	73/B		
245/45ZR18 XL		100Y	8.0J	C	A	72/B	265/45ZR20 XL	108Y	9.0J	C	A	73/B		
255/45ZR18		99Y	8.5J	C	A	72/B	275/45ZR20 XL	110Y	9.0J	C	A	73/B		
265/45ZR18		101Y	9.0J	C	A	72/B	285/45ZR20 EV	108Y	9.5J	B	A	74/B		
275/45ZR18 XL		107Y	9.0J	C	A	73/B	235/50R20 EV	104W	7.5J	C	A	71/B		
215/50R18		92W	7.0J	C	A	71/B	245/50R20 EV	102W	7.5J	B	A	71/B		
225/50R18		95W	7.0J	C	A	71/B	255/50R20 XL EV	109W	8.0J	B	A	73/B		
235/50R18 XL	101W	7.5J	C	A	72/B	235/55R20 XL	105W	7.5J	C	A	72/B			
245/50R18	100W	7.5J	C	A	71/B	255/55R20 XL	110W	8.0J	C	A	73/B			
215/55R18 XL EV	99V	7.0J	B	A	72/B	21"	275/30ZR21 XL	98Y	9.5J	C	A	73/B		
225/55R18 XL EV	102W	7.0J	B	A	72/B		285/30ZR21 XL	100Y	10.0J	C	A	75/B		
235/55R18 EV	100W	7.5J	B	A	71/B		315/30ZR21 XL	105Y	11.0J	C	A	75/B		
255/55R18 XL	109W	8.0J	C	A	73/B		245/35ZR21 XL EV	96Y	8.5J	C	A	72/B		
19"	255/30ZR19 XL	91Y	9.0J	D	A		73/B	275/35ZR21 XL EV	103Y	9.5J	B	A	73/B	
	235/35ZR19 XL	91Y	8.5J	D	A		72/B	285/35ZR21 XL	105Y	10.0J	C	A	75/B	
	245/35ZR19 XL	93Y	8.5J	D	A		72/B	295/35ZR21 XL	107Y	10.5J	C	A	75/B	
	255/35ZR19 XL	96Y	9.0J	D	A		73/B	255/40ZR21 XL	102Y	9.0J	C	A	73/B	
	275/35ZR19 XL	100Y	9.5J	C	A		73/B	265/40ZR21 XL	105Y	9.5J	C	A	73/B	
	225/40ZR19 XL	93Y	8.0J	D	A		72/B	275/40ZR21 XL	107Y	9.5J	C	A	73/B	
	235/40ZR19 XL	96Y	8.5J	D	A		72/B	285/40ZR21 XL	109Y	10.0J	C	A	75/B	
	245/40ZR19 XL	98Y	8.5J	C	A		72/B	295/40ZR21 XL EV	111Y	10.5J	B	A	75/B	
	255/40ZR19 XL	100Y	9.0J	C	A		73/B	315/40ZR21	111Y	11.0J	C	A	75/B	
	265/40ZR19	98Y	9.5J	D	A		72/B	235/45ZR21 XL EV	101Y	8.0J	B	A	72/B	
	275/40ZR19 XL	105Y	9.5J	C	A	73/B	255/45ZR21 XL EV	106W	8.5J	B	A	73/B		
	285/40ZR19 XL	107Y	10.0J	C	A	75/B	265/45ZR21 XL EV	108Y	9.0J	B	A	73/B		
	295/40ZR19 XL	108Y	10.5J	C	A	75/B	275/45ZR21 XL	110Y	9.0J	C	A	73/B		
	225/45ZR19 XL	96Y	7.5J	C	A	72/B	285/45ZR21 XL	113Y	9.5J	C	A	75/B		
235/45ZR19 XL	99Y	8.0J	C	A	72/B	22"	285/35ZR22 XL EV	106Y	10.0J	B	A	75/B		
245/45ZR19 EV	98Y	8.0J	C	A	71/B		325/35ZR22	110Y	11.5J	C	A	75/B		
255/45ZR19 XL EV	104Y	8.5J	B	A	73/B		265/40R22 XL	106V	9.5J	C	A	73/B		
265/45ZR19 XL	105Y	9.0J	C	A	73/B		275/40ZR22 XL	107Y	9.5J	C	A	73/B		
275/45ZR19 XL EV	108Y	9.0J	B	A	73/B		285/40ZR22 XL	110Y	10.0J	C	A	75/B		
235/50R19	99W	7.5J	C	A	71/B		325/40ZR22 XL	114Y	11.5J	C	A	75/B		
245/50R19 XL	105W	7.5J	C	A	72/B		255/45ZR22 XL	107Y	8.5J	C	A	73/B		
255/50R19 XL EV	107W	8.0J	B	A	73/B		275/45ZR22 XL	112Y	9.0J	C	A	73/B		
225/55R19 EV	99W	7.0J	C	A	71/B		285/45ZR22 XL	114W	9.5J	C	A	75/B		
235/55R19 XL EV	105W	7.5J	B	A	72/B		23"	285/35ZR23 XL	107Y	10.0J	C	A	75/B	
245/55R19	103V	7.5J	C	A	71/B			285/40ZR23 XL	111Y	10.0J	C	A	75/B	
255/55R19 XL	111W	8.0J	C	A	73/B									

SPORT SA-37



Benefits and Features

- New generation of asymmetric ultra high performance tyre for summer
- SILICA TECH compound helps to enhance wet grip providing shorter braking distance
- Strong center rib guarantees excellent handling on both wet and dry roads and on-center feel

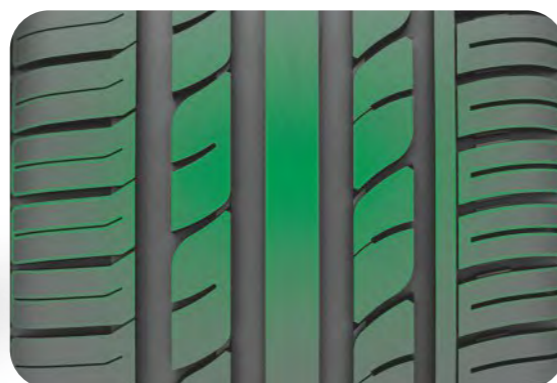

Rim Size	15 - 24
Series	30 - 65
Speed Rating	H - Y

SPORT SA-37

Rim (inch)	Size	Service Index	Standard Rim	Wet Grip	Wear	Rolling Noise (dB)	
15"	185/65R15	88H	5.5J	D	B	70/B	
	195/65R15	91V	6.0J	D	B	71/B	
16"	195/45R16 XL	84V	6.5J	D	B	72/B	
	205/50R16	87W	6.5J	D	B	71/B	
	225/50R16	92W	7.0J	D	B	71/B	
	205/55R16	91V	6.5J	D	B	71/B	
	205/55R16 XL	94W	6.5J	D	B	72/B	
	215/55R16	93V	7.0J	D	B	71/B	
17"	225/55R16 XL	99W	7.0J	D	B	72/B	
	205/40Zr17 XL	84Y	7.5J	D	B	72/B	
	215/40Zr17 XL	87Y	7.5J	D	B	72/B	
	245/40Zr17 XL	95Y	8.5J	D	B	72/B	
	205/45Zr17 XL	88Y	7.0J	D	B	72/B	
	215/45Zr17 XL	91Y	7.0J	D	B	72/B	
	225/45Zr17 XL	94Y	7.5J	D	B	72/B	
	235/45Zr17 XL	97Y	8.0J	D	B	72/B	
	245/45Zr17 XL	99W	8.0J	D	B	72/B	
	255/45Zr17 XL	102W	8.5J	D	B	73/B	
	205/50R17 XL	93W	6.5J	C	B	72/B	
	215/50R17 XL	95W	7.0J	C	B	72/B	
18"	225/50R17 XL	98W	7.0J	D	B	72/B	
	235/50R17	96V	7.5J	D	B	71/B	
	205/55R17 XL	95W	6.5J	D	B	72/B	
	215/55R17 XL	98W	7.0J	C	B	72/B	
	225/55R17 XL	101W	7.0J	C	B	72/B	
	235/55R17 XL	103W	7.5J	C	B	72/B	
	215/35ZR18 XL	84W	7.5J	D	B	72/B	
	225/35ZR18 XL	87Y	8.0J	D	B	72/B	
	245/35ZR18 XL	92W	8.5J	D	B	72/B	
	265/35ZR18 XL	97Y	9.5J	D	B	73/B	
	215/40ZR18 XL	89Y	7.5J	D	B	72/B	
	225/40ZR18 XL	92Y	8.0J	D	B	72/B	
19"	235/40ZR18 XL	95Y	8.5J	D	B	72/B	
	245/40ZR18 XL	97Y	8.5J	D	B	72/B	
	255/40ZR18 XL	99Y	9.0J	C	B	73/B	
	215/45ZR18 XL	93Y	7.0J	D	B	72/B	
	225/45ZR18 XL	95Y	7.5J	D	B	72/B	
	235/45ZR18 XL	98Y	8.0J	D	B	71/B	
	245/45ZR18 XL	100Y	8.0J	D	B	72/B	
	255/45ZR18	99W	8.5J	D	B	72/B	
	225/50R18	95W	7.0J	D	B	71/B	
	20"	215/50R17 XL	93W	6.5J	C	B	72/B
		215/50R17 XL	95W	7.0J	C	B	72/B
		225/50R17 XL	98W	7.0J	D	B	72/B
235/50R17		96V	7.5J	D	B	71/B	
205/55R17 XL		95W	6.5J	D	B	72/B	
215/55R17 XL		98W	7.0J	C	B	72/B	
225/55R17 XL		101W	7.0J	C	B	72/B	
235/55R17 XL		103W	7.5J	C	B	72/B	
215/35ZR18 XL		84W	7.5J	D	B	72/B	
225/35ZR18 XL		87Y	8.0J	D	B	72/B	
245/35ZR18 XL		92W	8.5J	D	B	72/B	
265/35ZR18 XL		97Y	9.5J	D	B	73/B	
21"	215/40ZR18 XL	89Y	7.5J	D	B	72/B	
	225/40ZR18 XL	92Y	8.0J	D	B	72/B	
	235/40ZR18 XL	95Y	8.5J	D	B	72/B	
	245/40ZR18 XL	97Y	8.5J	D	B	72/B	
	255/40ZR18 XL	99Y	9.0J	C	B	73/B	
	215/45ZR18 XL	93Y	7.0J	D	B	72/B	
	225/45ZR18 XL	95Y	7.5J	D	B	72/B	
	235/45ZR18 XL	98Y	8.0J	D	B	71/B	
	245/45ZR18 XL	100Y	8.0J	D	B	72/B	
	255/45ZR18	99W	8.5J	D	B	72/B	
	225/50R18	95W	7.0J	D	B	71/B	
	22"	215/50R17 XL	93W	6.5J	C	B	72/B
215/50R17 XL		95W	7.0J	C	B	72/B	
225/50R17 XL		98W	7.0J	D	B	72/B	
235/50R17		96V	7.5J	D	B	71/B	
205/55R17 XL		95W	6.5J	D	B	72/B	
215/55R17 XL		98W	7.0J	C	B	72/B	
225/55R17 XL		101W	7.0J	C	B	72/B	
235/55R17 XL		103W	7.5J	C	B	72/B	
215/35ZR18 XL		84W	7.5J	D	B	72/B	
225/35ZR18 XL		87Y	8.0J	D	B	72/B	
245/35ZR18 XL		92W	8.5J	D	B	72/B	
265/35ZR18 XL		97Y	9.5J	D	B	73/B	
23"	215/40ZR18 XL	89Y	7.5J	D	B	72/B	
	225/40ZR18 XL	92Y	8.0J	D	B	72/B	
	235/40ZR18 XL	95Y	8.5J	D	B	72/B	
	245/40ZR18 XL	97Y	8.5J	D	B	72/B	
	255/40ZR18 XL	99Y	9.0J	C	B	73/B	
	215/45ZR18 XL	93Y	7.0J	D	B	72/B	
	225/45ZR18 XL	95Y	7.5J	D	B	72/B	
	235/45ZR18 XL	98Y	8.0J	D	B	71/B	
	245/45ZR18 XL	100Y	8.0J	D	B	72/B	
	255/45ZR18	99W	8.5J	D	B	72/B	
	225/50R18	95W	7.0J	D	B	71/B	
	24"	215/50R17 XL	93W	6.5J	C	B	72/B
215/50R17 XL		95W	7.0J	C	B	72/B	
225/50R17 XL		98W	7.0J	D	B	72/B	
235/50R17		96V	7.5J	D	B	71/B	
205/55R17 XL		95W	6.5J	D	B	72/B	
215/55R17 XL		98W	7.0J	C	B	72/B	
225/55R17 XL		101W	7.0J	C	B	72/B	
235/55R17 XL		103W	7.5J	C	B	72/B	
215/35ZR18 XL		84W	7.5J	D	B	72/B	
225/35ZR18 XL		87Y	8.0J	D	B	72/B	
245/35ZR18 XL		92W	8.5J	D	B	72/B	
265/35ZR18 XL		97Y	9.5J	D	B	73/B	
25"	215/40ZR18 XL	89Y	7.5J	D	B	72/B	
	225/40ZR18 XL	92Y	8.0J	D	B	72/B	
	235/40ZR18 XL	95Y	8.5J	D	B	72/B	
	245/40ZR18 XL	97Y	8.5J	D	B	72/B	
	255/40ZR18 XL	99Y	9.0J	C	B	73/B	
	215/45ZR18 XL	93Y	7.0J	D	B	72/B	
	225/45ZR18 XL	95Y	7.5J	D	B	72/B	
	235/45ZR18 XL	98Y	8.0J	D	B	71/B	
	245/45ZR18 XL	100Y	8.0J	D	B	72/B	
	255/45ZR18	99W	8.5J	D	B	72/B	
	225/50R18	95W	7.0J	D	B	71/B	
	26"	215/50R17 XL	93W	6.5J	C	B	72/B
215/50R17 XL		95W	7.0J	C	B	72/B	
225/50R17 XL		98W	7.0J	D	B	72/B	
235/50R17		96V	7.5J	D	B	71/B	
205/55R17 XL		95W	6.5J	D	B	72/B	
215/55R17 XL		98W	7.0J	C	B	72/B	
225/55R17 XL		101W	7.0J	C	B	72/B	
235/55R17 XL		103W	7.5J	C	B	72/B	
215/35ZR18 XL		84W	7.5J	D	B	72/B	
225/35ZR18 XL		87Y	8.0J	D	B	72/B	
245/35ZR18 XL		92W	8.5J	D	B	72/B	
265/35ZR18 XL		97Y	9.5J	D	B	73/B	
27"	215/40ZR18 XL	89Y	7.5J	D	B	72/B	
	225/40ZR18 XL	92Y	8.0J	D	B	72/B	
	235/40ZR18 XL	95Y	8.5J	D	B	72/B	
	245/40ZR18 XL	97Y	8.5J	D	B	72/B	
	255/40ZR18 XL	99Y	9.0J	C	B	73/B	
	215/45ZR18 XL	93Y	7.0J	D	B	72/B	
	225/45ZR18 XL	95Y	7.5J	D	B	72/B	
	235/45ZR18 XL	98Y	8.0J	D	B	71/B	
	245/45ZR18 XL	100Y	8.0J	D	B	72/B	
	255/45ZR18	99W	8.5J	D	B	72/B	
	225/50R18	95W	7.0J	D	B	71/B	
	28"	215/50R17 XL	93W	6.5J	C	B	72/B
215/50R17 XL		95W	7.0J	C	B	72/B	
225/50R17 XL		98W	7.0J	D	B	72/B	
235/50R17		96V	7.5J	D	B	71/B	
205/55R17 XL		95W	6.5J	D	B	72/B	
215/55R17 XL		98W	7.0J	C	B	72/B	
225/55R17 XL		101W	7.0J	C	B	72/B	
235/55R17 XL		103W	7.5J	C	B	72/B	
215/35ZR18 XL		84W	7.5J	D	B	72/B	
225/35ZR18 XL		87Y	8.0J	D	B	72/B	
245/35ZR18 XL		92W	8.5J	D	B	72/B	
265/35ZR18 XL		97Y	9.5J	D	B	73/B	
29"	215/40ZR18 XL	89Y	7.5J	D	B	72/B	
	225/40ZR18 XL	92Y	8.0J	D	B	72/B	
	235/40ZR18 XL	95Y	8.5J	D	B	72/B	
	245/40ZR18 XL	97Y	8.5J	D	B	72/B	
	255/40ZR18 XL	99Y	9.0J	C	B	73/B	
	215/45ZR18 XL	93Y	7.0J	D	B	72/B	
	225/45ZR18 XL	95Y	7.5J	D	B	72/B	
	235/45ZR18 XL	98Y	8.0J	D	B	71/B	
	245/45ZR18 XL	100Y	8.0J	D	B	72/B	
	255/45ZR18	99W	8.5J	D	B	72/B	
	225/50R18	95W	7.0J	D	B	71/B	
	30"	215/50R17 XL	93W	6.5J	C	B	72/B
215/50R17 XL		95W	7.0J	C	B	72/B	
225/50R17 XL		98W	7.0J	D	B	72/B	
235/50R17		96V	7.5J	D	B	71/B	
205/55R17 XL		95W	6.5J	D	B	72/B	
215/55R17 XL		98W	7.0J	C	B	72/B	
225/55R17 XL		101W	7.0J	C	B	72/B	
235/55R17 XL		103W	7.5J	C	B	72/B	
215/35ZR18 XL		84W	7.5J	D	B	72/B	
225/35ZR18 XL		87Y	8.0J	D	B	72/B	
245/35ZR18 XL		92W	8.5J	D	B	72/B	
265/35ZR18 XL		97Y	9.5J	D	B	73/B	
31"	215/40ZR18 XL	89Y	7.5J	D	B	72/B	
	225/40ZR18 XL	92Y	8.0J	D	B	72/B	
	235/40ZR18 XL	95Y	8.5J	D	B	72/B	
	245/40ZR18 XL	97Y	8.5J	D	B	72/B	
	255/40ZR18 XL	99Y	9.0J	C	B	73/B	
	215/45ZR18 XL	93Y	7.0J	D	B	72/B	
	225/45ZR18 XL	95Y	7.5J	D	B	72/B	
	235/45ZR18 XL	98Y	8.0J	D	B	71/B	
	245/45ZR18 XL	100Y	8.0J	D	B	72/B	
	255/45ZR18	99W	8.5J	D	B	72/B	
	225/50R18	95W	7.0J	D	B	71/B	
	32"	215/50R17 XL	93W	6.5J	C	B	72/B
21							

ZUPERACE SA-57



Benefits and Features

- New generation of directional Ultra High Performance tyre
- Circumferential V-grooves ensure outstanding water drainage
- Strong center ribs provides remarkable handling while steering
- Improved SILICA compounding enhance the wet and dry grip



M+S

Rim Size	15 - 24
Series	35 - 60
Speed Rating	V - W

ZUPERACE SA-57

Rim (inch)	Size	Service Index	Standard Rim	Control	Wet Traction	Directional	Silica	Rim (inch)	Size	Service Index	Standard Rim	Control	Wet Traction	Directional	Silica
15"	195/50R15	82V	6.0J	D	B	71/B		18"	225/45ZR18 XL	95W	7.5J	D	B	72/B	
	195/55R15	85V	6.0J	D	B	71/B			235/45ZR18 XL	98W	8.0J	D	B	72/B	
16"	205/50R16	87W	6.5J	D	B	71/B		245/45ZR18 XL	100W	8.0J	D	B	72/B		
	225/50R16	92W	7.0J	D	B	71/B		225/50R18	95W	7.0J	D	B	71/B		
	205/55R16 XL	94W	6.5J	D	B	72/B		235/50R18 XL	101W	7.5J	D	B	72/B		
	215/55R16 XL	97W	7.0J	D	B	72/B		255/55R18 XL	109V	8.0J	D	B	73/B		
	225/55R16 XL	99W	7.0J	D	B	72/B		265/60R18	110V	8.0J	C	B	72/B		
17"	205/40ZR17 XL	84W	7.5J	D	B	72/B		19"	215/35ZR19 XL	85W	7.5J	D	B	72/B	
	215/40ZR17 XL	87W	7.5J	D	B	72/B			225/35ZR19 XL	88W	8.0J	D	B	72/B	
	245/40ZR17 XL	95W	8.5J	D	B	72/B			245/45ZR19 XL	102W	8.0J	D	B	72/B	
	205/45ZR17 XL	88W	7.0J	D	B	72/B			255/45ZR19 XL	104W	8.5J	D	B	73/B	
	215/45ZR17 XL	91W	7.0J	D	B	72/B			20"	275/40ZR20 XL	106W	9.5J	C	B	73/B
	225/45ZR17 XL	94W	7.5J	D	B	72/B		255/45R20 XL		105V	8.5J	C	B	73/B	
	235/45ZR17 XL	97W	8.0J	D	B	72/B		275/45R20 XL		110V	9.0J	C	B	73/B	
	205/50R17 XL	93W	6.5J	D	B	72/B		265/50R20 XL		111V	8.5J	C	B	73/B	
	215/50R17 XL	95W	7.0J	D	B	72/B		285/50R20		112V	9.0J	C	B	74/B	
	18"	225/50R17 XL	98W	7.0J	D	B	72/B		275/55R20 XL	117V	8.5J	C	B	73/B	
215/55R17 XL		98W	7.0J	D	B	72/B		275/60R20 XL	119V	8.0J	C	B	73/B		
225/55R17 XL		101W	7.0J	D	B	72/B		22"	265/35R22 XL	102V	9.5J	D	B	73/B	
235/55R17 XL		103W	7.5J	D	B	72/B			285/35R22 XL	106V	10.0J	D	B	75/B	
265/35ZR18 XL		97W	9.5J	D	B	73/B			265/40R22 XL	106V	9.5J	C	B	73/B	
225/40ZR18 XL		92W	8.0J	D	B	72/B			305/40R22 XL	114V	11.0J	C	B	75/B	
235/40ZR18 XL	95W	8.5J	D	B	72/B		305/45R22 XL		118V	10.0J	C	B	75/B		
245/40ZR18 XL	97W	8.5J	D	B	72/B		295/35R24 XL		110V	10.5J	C	B	75/B		




ZuperEco Z-107



Benefits and Features

- Premium touring tyre for summer
- Improved tyre structure guarantees a comfort and smooth ride
- Optimized compound offers better wet grip and lower rolling resistance
- Remarkable handling on dry and wet road surface

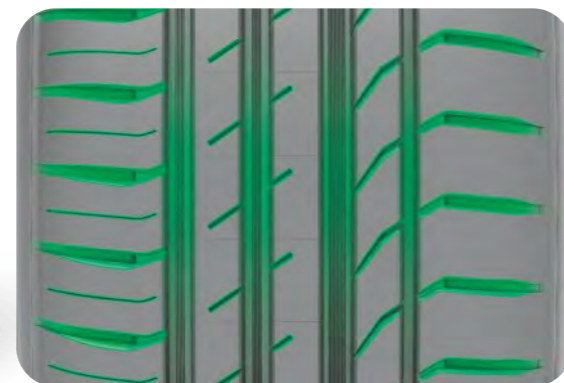

Rim Size	13 - 20
Series	30 - 80
Speed Rating	T - W

ZuperEco Z-107

Rim (inch)	Size	Service Index	Standard Rim	ABC	XYZ	Rim (inch)	Size	Service Index	Standard Rim	ABC	XYZ			
13"	155/65R13	73T	4.5B	D	B	70/B	16"	235/60R16	100H	7.0J	C	B	71/B	
	155/70R13	75T	4.5J	D	B	70/B		205/65R16	95H	6.0J	C	B	71/B	
	165/70R13	79T	5.0J	D	B	70/B		215/65R16	98H/V	6.5J	C	B	71/B	
	14"	175/70R13	82T	5.0J	D	B	70/B	17"	205/40R17 XL	84W	7.5J	D	B	72/B
		185/70R13	86T	5.5J	D	B	70/B		215/40R17 XL	87W	7.5J	D	B	72/B
		155/80R13	79T	4.5J	D	B	70/B		255/40R17	94V	9.0J	D	B	72/B
		165/80R13	83T	4.5B	D	B	70/B		195/45R17 XL	85W	6.5J	D	B	72/B
185/60R14		82H	5.5J	D	B	70/B	205/45R17 XL		88W	7.0J	D	B	72/B	
155/65R14		75T	4.5J	D	B	70/B	215/45R17 XL		91W	7.0J	D	B	72/B	
165/65R14		79T	5.0J	D	B	70/B	225/45R17 XL		94W	7.5J	C	B	72/B	
175/65R14		82H/T	5.0J	D	B	70/B	235/45R17 XL		97W	8.0J	C	B	72/B	
185/65R14		86H	5.5J	D	B	70/B	245/45R17 XL		99W	8.0J	C	B	72/B	
195/65R14		89H	6.0J	D	B	71/B	205/50R17 XL		93W	6.5J	C	B	72/B	
15"	165/70R14	81T	5.0J	D	B	70/B	215/50R17 XL	95W	7.0J	C	B	72/B		
	175/70R14	84T	5.0J	D	B	70/B	225/50R17 XL	98W	7.0J	C	B	72/B		
	185/70R14	88T	5.5J	C	B	70/B	205/55R17 XL	95W	6.5J	C	B	72/B		
	195/70R14	91T	6.0J	C	B	71/B	215/55R17 XL	98W	7.0J	C	B	72/B		
	205/70R14	95T	6.0J	C	B	71/B	225/55R17 XL	101W	7.0J	C	B	72/B		
	195/45R15	78V	6.5J	D	B	71/B	235/55R17	99V	7.5J	C	B	71/B		
	195/50R15	82V	6.0J	D	B	71/B	235/55R17 XL	103W	7.5J	C	B	72/B		
	175/55R15	77H	5.5J	D	B	70/B	215/60R17	96V/H	6.5J	C	B	71/B		
	185/55R15	82V/H	6.0J	D	B	70/B	235/65R17	104V	7.0J	C	B	71/B		
	195/55R15	85V/H	6.0J	D	B	71/B	235/65R17 XL	108V	7.0J	C	B	72/B		
	155/60R15	74H	4.5B	D	B	70/B	18"	265/35ZR18 XL	97W	9.5J	C	B	73/B	
	175/60R15	81H	5.0J	D	B	70/B		205/40R18 XL	86W	7.5J	D	B	71/B	
	185/60R15	84H	5.5J	D	B	70/B		215/40R18 XL	89W	7.5J	D	B	72/B	
	195/60R15	88V/H	6.0J	D	B	71/B		225/40R18 XL	92W	8.0J	C	B	72/B	
205/60R15	91H	6.0J	C	B	71/B	235/40R18 XL		95W	8.5J	C	B	72/B		
165/65R15	81H	5.0J	D	B	70/B	245/40R18 XL		97W	8.5J	C	B	72/B		
175/65R15	84H	5.0J	D	B	70/B	215/45R18 XL		93W	7.0J	D	B	72/B		
185/65R15	88H/T	5.5J	D	B	70/B	225/45R18 XL		95W	7.5J	C	B	72/B		
195/65R15	91V/H/T	6.0J	C	B	71/B	235/45R18 XL		98W	8.0J	C	B	72/B		
215/65R15	96H	6.5J	C	B	71/B	245/45R18 XL		100W	8.0J	C	B	72/B		
16"	205/65R15	94V	6.0J	C	B	71/B	235/50R18	97V	7.5J	D	B	71/B		
	205/70R15	96H	6.0J	C	B	71/B	215/55R18 XL	99V	7.0J	C	B	72/B		
	215/70R15	98H	6.5J	C	B	71/B	225/55R18	98V	7.0J	C	B	71/B		
	215/40R16 XL	86W	7.5J	D	B	72/B	235/55R18	100H/V	7.5J	C	B	71/B		
	195/45R16 XL	84V	6.5J	D	B	72/B	225/60R18	100H	6.5J	D	B	71/B		
	205/45R16 XL	87W	7.0J	D	B	72/B	235/60R18 XL	107V	7.0J	D	B	71/B		
	215/45R16 XL	90W	7.0J	D	B	72/B	255/60R18 XL	112V	7.5J	C	B	73/B		
	185/50R16	81V	6.0J	D	B	70/B	19"	225/35ZR19 XL	88W	8.0J	D	B	72/B	
	195/50R16	84V	6.0J	D	B	71/B		235/35ZR19 XL	91W	8.5J	D	B	72/B	
	205/50R16	87V	6.5J	D	B	71/B		245/35ZR19 XL	93W	8.5J	D	B	72/B	
	185/55R16	83V	6.0J	C	B	70/B		265/35ZR19 XL	98W	9.5J	D	B	73/B	
	195/55R16	87V/H	6.0J	D	B	71/B		225/40R19 XL	93W	8.0J	C	B	72/B	
	205/55R16	91W/V/H	6.5J	D	B	71/B		235/40R19 XL	96W	8.5J	C	B	72/B	
	205/55R16 XL	94W	6.5J	C	B	72/B		245/40R19 XL	98W	8.5J	C	B	72/B	
	215/55R16	93V	7.0J	C	B	71/B		275/40R19 XL	105W	9.5J	C	B	73/B	
	215/55R16 XL	97W	7.0J	C	B	72/B		225/45R19 XL	96W	7.5J	C	B	72/B	
225/55R16 XL	99W	7.0J	C	B	72/B	235/45R19 XL		99W	8.0J	C	B	72/B		
17"	195/60R16	89V	6.0J	C	B	71/B	205/55R19 XL	97V	6.5J	C	B	72/B		
	205/60R16	92V/H	6.0J	C	B	71/B	235/55R19 XL	105V	7.5J	C	B	72/B		
	215/60R16 XL	99V	6.5J	C	B	72/B	20"	245/30R20 XL	90W	8.5J	D	B	72/B	
	225/60R16	98H	6.5J	C	B	71/B		245/40R20 XL	99W	8.5J	C	B	71/B	
								195/55R20 XL	95H	6.0J	C	B	72/B	

Note: Section Width less than 195 with 3 grooves

SOLMAX 1^{SUV}



Benefits and Features

Variable-pitch noise-reduction pattern blocks, sound-bolts in 4 circumferential grooves, and the staggered arrangement of inner and outer lateral grooves to provide consumers with a more comfortable driving experience.

Hybrid Silane patent to optimize the tread compound and absorb road vibration effectively to further improved consumer's driving and experience

The patented Nanometer Mixing-Technology and High saturation pattern design, provide tires with better wear resistance and increased mileage.


Improved Durability

Nanometer Mixing-Technology™ for longer mileage



Driving Comfort

Hybrid Silane™ to optimize tread rubber compound
Soft Tread Compound and Minimized Vibration

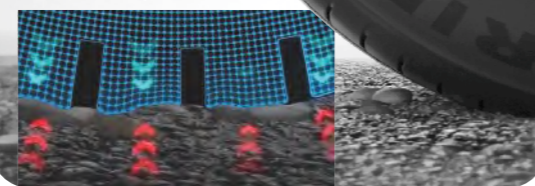

Strong Grip

Hybrid Formula™- Super hybrid rubber compound / Fast water drainage and strong grip



Hybrid Silane
(Driving Comfort)



Hybrid Formula
(Strong Grip)



BPOT Technology
(Improved Durability)



Rim Size	17 - 22
Series	50 - 70
Speed Rating	T - V

SOLMAX 1^{SUV}

Rim (inch)	Size	Service Index	Standard Rim	Wear	Rolling Noise	Wet Grip	Rim (inch)	Size	Service Index	Standard Rim	Wear	Rolling Noise	Wet Grip	
17"	215/60R17	96V	6.5J	D	C	71/B	18"	265/60R18 XL	114V	8.0J	C	C	73/B	
	225/60R17 XL	103V	6.5J	C	C	72/B		285/60R18	116V	8.5J	C	C	74/B	
	235/60R17	102V	7.0J	C	C	71/B		235/65R18 EV	106H	7.0J	B	C	71/B	
	255/60R17 XL	110V	7.5J	C	C	73/B		265/65R18	114T	8.0J	C	C	72/B	
	215/65R17 EV	99V	6.5J	B	C	71/B		19"	265/50R19 XL	110V	8.5J	C	C	73/B
	225/65R17 XL	106V	6.5J	C	C	72/B			275/50R19 XL	112V	8.5J	C	C	73/B
	235/65R17 XL	108V	7.0J	C	C	72/B			275/55R19	111V	8.5J	C	C	72/B
	245/65R17	107H	7.0J	C	C	71/B			235/60R19 XL EV	107V	7.0J	B	C	72/B
	18"	265/65R17	112H	8.0J	C	C		72/B	255/60R19 XL	113V	7.5J	C	C	73/B
		275/65R17	115H	8.0J	C	C		72/B	235/65R19 XL	109V	7.0J	C	C	72/B
285/65R17		116H	8.5J	C	C	74/B	20"	265/50R20 XL	111V	8.5J	C	C	73/B	
215/70R17		101H	6.5J	C	C	71/B		285/50R20	112V	9.0J	C	C	74/B	
225/60R18		100H	6.5J	D	C	71/B		275/55R20 XL	117V	8.5J	C	C	73/B	
235/60R18 XL EV		107V	7.0J	B	C	72/B		21"	275/50R21 XL	113V	8.5J	C	C	73/B
245/60R18		105H	7.0J	C	C	71/B	22"		275/50R22	111H	8.5J	C	C	72/B
255/60R18 XL		112V	7.5J	C	C	73/B								

EV EV Ready





SU318 H/T



Benefits and Features

- Ideal H/T tyre integrated outstanding on-road comfort and wet traction safety as a whole
- Four longitude grooves combined with wind sipes ensure excellent water evacuation and wet traction performance
- SILICA TECH adopted for better wet grip as well as low rolling resistance
- Re-constructed steel bead wire improves driving comfort effectively

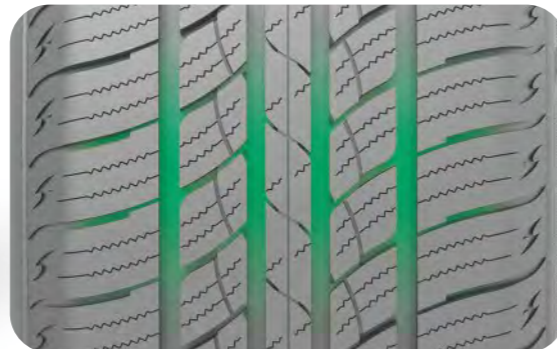

Rim Size	15 - 20
Series	40 - 75
Speed Rating	T - V

SU318 H/T

Rim (inch)	Size	Service Index	Standard Rim	Wet Grip	Rolling Resistance	Noise	Rim (inch)	Size	Service Index	Standard Rim	Wet Grip	Rolling Resistance	Noise
15"	225/70R15	100T	6.5J	D	C	71/B	17"	225/65R17 XL	106V	6.5J	D	C	72/B
	235/70R15	103T	7.0J	D	C	71/B		235/65R17 XL	108V	7.0J	D	C	72/B
	265/70R15	112T	8.0J	C	C	72/B		245/65R17	107H	7.0J	D	C	71/B
	215/75R15	100T	6.0J	D	C	71/B		255/65R17	110H	7.5J	C	C	72/B
	225/75R15	102H	6.0J	D	C	71/B		265/65R17	112T	8.0J	C	C	72/B
	235/75R15	105H	6.5J	D	C	71/B		275/65R17	115T	8.0J	C	C	72/B
	265/75R15	112T	7.5J	C	C	72/B		285/65R17	116H	8.5J	C	C	74/B
16"	255/65R16	109H	7.5J	C	C	72/B	245/70R17	110T	7.0J	D	C	71/B	
	215/70R16	100H	6.5J	D	C	71/B	255/70R17	112T	7.5J	C	C	72/B	
	225/70R16	103H	6.5J	D	C	71/B	265/70R17	115T	8.0J	C	C	72/B	
	235/70R16	106H	7.0J	D	C	71/B	18"	235/50R18	97V	7.5J	D	C	71/B
	245/70R16 XL	111H	7.0J	D	C	72/B		225/55R18	98V	7.0J	D	C	71/B
	255/70R16	111T	7.5J	C	C	72/B	235/55R18	100V	7.5J	D	C	71/B	
	265/70R16	112H	8.0J	C	C	72/B	255/55R18 XL	109V	8.0J	C	C	73/B	
	275/70R16	114T	8.0J	C	C	72/B	225/60R18	100V	6.5J	D	C	71/B	
	225/75R16	104H	6.0J	D	C	71/B	235/60R18	103V	7.0J	D	C	71/B	
	235/75R16	108T	6.5J	D	C	71/B	245/60R18	105T	7.0J	D	C	71/B	
245/75R16	111T	7.0J	D	C	71/B	255/60R18 XL	112V	7.5J	C	C	73/B		
265/75R16	116T	7.5J	C	C	72/B	265/60R18 XL	114V	8.0J	C	C	73/B		
17"	215/60R17	96H	6.5J	D	C	71/B	285/60R18	116H	8.5J	C	C	74/B	
	225/60R17 XL	103V	6.5J	D	C	72/B	19"	275/45R19 XL	108V	9.0J	C	C	73/B
	235/60R17	102T	7.0J	D	C	71/B		255/50R19 XL	107V	8.0J	C	C	73/B
	255/60R17 XL	110V	7.5J	C	C	73/B		255/65R19 XL	114V	7.5J	C	C	73/B
	265/60R17	108H	8.0J	C	C	72/B	20"	275/40R20 XL	106V	9.5J	D	C	73/B
	275/60R17	110T	8.0J	C	C	72/B		275/55R20 XL	117V	8.5J	C	C	73/B
215/65R17	99H	6.5J	D	C	71/B	255/60R20		113V	7.5J	C	C	72/B	




SL369 A/T



Benefits and Features

- Wide tread and multi-stepped grooves increase surface area of tread to enhance traction on both on and off roads
- Zig-zag grooves offers efficient water drainage and enhanced traction on wet road
- Large tread blocks help enhanced stability and handling with less noise on highway
- Aggressive sidewall protectors increase off-road bite and prevent damage from sidewall cut and abrasions



M+S

Rim Size	15 - 20
Series	45 - 80
Speed Rating	S - V

SL369 A/T

Rim (inch)	Size	Service Index	Standard Rim	ON & OFF	Braking	Wet Traction	Mileage	Rim (inch)	Size	Service Index	Standard Rim	ON & OFF	Braking	Wet Traction	Mileage
15"	205/65R15	94H	6.0J	D	D	71/B		17"	225/65R17	102T	6.5J	D	D	71/B	
	205/70R15	96H	6.0J	D	D	71/B			235/65R17	104S	7.0J	D	D	71/B	
	225/70R15	100T	6.5J	D	D	71/B			245/65R17	107S	7.0J	D	D	71/B	
	235/70R15	103S	7.0J	D	D	71/B			255/65R17	110T	7.5J	D	D	72/B	
	265/70R15	112T	8.0J	D	D	72/B			265/65R17	112S	8.0J	D	D	72/B	
	P215/75R15	100S	6.0J	D	D	71/B			225/70R17 XL	108S	6.5J	D	D	72/B	
16"	235/75R15 XL	109S	6.5J	D	D	72/B		245/70R17	110T	7.0J	D	D	71/B		
	205/60R16	92H	6.0J	D	D	71/B		255/70R17	112T	7.5J	D	D	72/B		
	235/60R16	100T	7.0J	D	D	71/B		265/70R17	115T	8.0J	D	D	72/B		
	215/70R16	100S	6.5J	D	D	71/B		285/70R17	117T	8.5J	D	D	74/B		
	225/70R16	103S	6.5J	D	D	71/B		235/75R17	109T	6.5J	D	D	71/B		
	235/70R16	106S	7.0J	D	D	71/B		245/75R17	112T	7.0J	D	D	71/B		
	245/70R16 XL	111S	7.0J	D	D	72/B		255/75R17	115T	7.0J	D	D	72/B		
	255/70R16	111T	7.5J	D	D	72/B		18"	265/60R18	110T	8.0J	D	D	72/B	
	265/70R16	112S	8.0J	D	D	72/B			265/65R18	114T	8.0J	D	D	72/B	
	275/70R16	114S	8.0J	D	D	72/B			275/65R18	116T	8.0J	D	D	72/B	
	225/75R16 XL	108S	6.0J	D	D	72/B		20"	275/45R20 XL	110H	9.0J	D	D	73/B	
	235/75R16 XL	112S	6.5J	D	D	72/B			265/50R20 XL	111T	8.5J	D	D	73/B	
245/75R16	111S	7.0J	D	D	71/B		285/50R20 XL		116V	9.0J	D	D	75/B		
265/75R16	116S	7.5J	D	D	72/B		275/55R20		113S	8.5J	D	D	72/B		
205/80R16 XL	104S	5.5J	D	D	72/B		275/60R20		115T	8.0J	D	D	72/B		
215/80R16 XL	107S	6.0J	D	D	72/B										

Outline White Letters (OWL)




TERRA LEGEND SL399



Benefits and Features

- Wider tread design and new compound help longer tread life On & Off road
- Side-Biter lugs in the sidewall improve traction in mud and rough road
- Aggressive sidewall design provide increased traction, especially in aired-down driving situations



M+S

Rim Size	15 - 20
Series	50 - 75
Speed Rating	Q - S

TERRA LEGEND SL399

Rim (inch)	Size	LR/PR	Service Index	Standard Rim	Icons	Rim (inch)	Size	LR/PR	Service Index	Standard Rim	Icons
15"	31x10.50R15LT	C/6PR	109S	8.5J	/ POR /	17"	LT265/65R17	E/10PR	120/117Q	8.0J	/ POR /
	LT235/75R15	C/6PR	104/101R	6.5J	/ POR /		LT285/65R17	E/10PR	121/118Q	8.5J	/ POR /
	LT235/75R15	C/6PR	104/101Q	6.5J	/ POR /		LT245/70R17	E/10PR	119/116Q	7.0J	/ POR /
16"	LT245/70R16	E/10PR	118/115Q	7.0J	/ POR /	20"	LT285/50R20	E/10PR	119/116Q	9.0J	/ POR /
	LT245/75R16	E/10PR	120/116Q	7.0J	/ POR /						

POR: Professional Off-Road




MUD LEGEND SL366



Benefits and Features

- Especially designed for unpaved tough roads (Professional off-road tyres)
- Various shoulder blocks promote driving and handling performance on tough roads
- Perfect grip on tough surfaces such as mud and sand



Rim Size	14 - 20
Series	50 - 85
Speed Rating	Q

MUD LEGEND SL366

Rim (inch)	Size	LR/PR	Service Index	Standard Rim	Icons	Rim (inch)	Size	LR/PR	Service Index	Standard Rim	Icons
14"	185R14C	D/8PR	102/100Q	5.5J	/ POR /	16"	205R16C	D/8PR	110/108Q	6.0J	/ POR /
	195R14C	D/8PR	106/104Q	5.5J	/ POR /		LT225/75R16	E/10PR	115/112Q	6.0J	/ POR /
15"	205/70R15C	C/6PR	104/102Q	6.0J	/ POR /	LT245/75R16	E/10PR	120/116Q	7.0J	/ POR /	
	30×9.50R15LT	C/6PR	104Q	7.5J	/ POR /	LT235/85R16	E/10PR	120/116Q	6.5J	/ POR /	
	31×10.50R15LT	C/6PR	109Q	8.5J	/ POR /	17"	35×12.50R17LT	E/10PR	121Q	10.0J	/ POR /
	32×11.50R15LT	C/6PR	113Q	9.0J	/ POR /		LT265/65R17	E/10PR	120/117Q	8.0J	/ POR /
	33×12.50R15LT	C/6PR	108Q	10.0J	/ POR /		LT245/70R17	E/10PR	119/116Q	7.0J	/ POR /
	35×12.50R15LT	C/6PR	113Q	10.0J	/ POR /		LT265/70R17	E/10PR	121/118Q	8.0J	/ POR /
LT215/75R15	C/6PR	100/97Q	6.0J	/ POR /	LT285/70R17	E/10PR	121/118Q	8.5J	/ POR /		
LT225/75R15	C/6PR	102/99Q	6.0J	/ POR /	LT315/70R17	E/10PR	121/118Q	9.5J	/ POR /		
LT235/75R15	C/6PR	104/101Q	6.5J	/ POR /	20"	33×12.50R20LT	E/10PR	114Q	10.0J	/ POR /	
LT235/75R15	D/8PR	110/107Q	6.5J	/ POR /		35×12.50R20LT	E/10PR	121Q	10.0J	/ POR /	

POR: Professional Off-Road




MUD LEGEND SL378



Benefits and Features

- The aggressive tread design is engineered to provide strong biting edges
- The staggered, off-center tread blocks provide increased traction while enhancing road performance
- Built to handle rugged terrains anywhere and to take you on extreme adventures
- Robust shoulder design helps to minimizing cuts



Rim Size	15 - 18
Series	60 - 85
Speed Rating	Q

MUD LEGEND SL378

Rim (inch)	Size	LR/PR	Service Index	Standard Rim	Icons	Rim (inch)	Size	LR/PR	Service Index	Standard Rim	Icons
15"	31x10.50R15LT	C/6PR	109Q	8.5J	/ POR /	16"	LT245/75R16	E/10PR	120/116Q	7.0J	/ POR /
	33x12.50R15LT	C/6PR	108Q	10.0J	/ POR /		LT235/85R16	E/10PR	120/116Q	6.5J	/ POR /
	LT215/75R15	C/6PR	100/97Q	6.0J	/ POR /		LT265/65R17	E/10PR	120/117Q	8.0J	/ POR /
	LT235/75R15	C/6PR	104/101Q	6.5J	/ POR /		LT245/70R17	E/10PR	119/116Q	7.0J	/ POR /
16"	LT235/75R15	D/8PR	110/107Q	6.5J	/ POR /	LT265/70R17	E/10PR	121/118Q	8.0J	/ POR /	
	LT245/70R16	E/10PR	118/115Q	7.0J	/ POR /	LT285/70R17	E/10PR	121/118Q	8.5J	/ POR /	
	LT265/70R16	E/10PR	121/118Q	8.0J	/ POR /	18"	LT265/60R18	E/10PR	119/116Q	8.0J	/ POR /

POR: Professional Off-Road



SC328



Benefits and Features

- Wide four ribs improve miles to tread life
- Zig-zag grooves offers enhanced traction on wet road
- Combination construction of polyester casing and steel belts provide outstanding durability



M+S

Rim Size	13 - 16
Series	60 - 75
Speed Rating	Q - T

SC328

Rim (inch)	Size	LR/PR	Service Index	Standard Rim	Efficiency	Mileage	Silica	Wet Traction	XYdB
13"	155R13C	D/8PR	90/88S	4.5B	D	C	72/B		
	165R13C	C/6PR	91/89Q	4.5B	D	C	72/B		
	175R13C	D/8PR	97/95Q	5.0B	D	C	72/B		
14"	185R14C	D/8PR	102/100Q	5.5J	D	C	72/B		
	205R14C	D/8PR	109/107R	6.0J	D	C	72/B		
	215R14C	D/8PR	112/110Q	6.0J	D	C	72/B		
	205/70R14C	C/6PR	102/100R	6.0J	D	C	72/B		
	215/75R14C	D/8PR	112/110Q	6.0J	D	C	72/B		
15"	185R15C	D/8PR	103/102R	5.5J	D	C	72/B		
	195R15C	D/8PR	106/104R	5.5J	D	C	72/B		
	215R15C	D/8PR	112/110Q	6.0J	D	C	72/B		
	205/65R15C	C/6PR	102/100T	6.0J	D	C	72/B		
	195/70R15C	D/8PR	104/102R	6.0J	D	C	72/B		
	205/70R15C	D/8PR	106/104R	6.0J	D	C	72/B		
	215/70R15C	D/8PR	109/107R	6.5J	D	C	72/B		
	225/70R15C	D/8PR	112/110R	6.5J	D	C	72/B		
16"	175R16C	C/6PR	98/96Q	5.0J	D	B	72/B		
	215/60R16C	D/8PR	108/106T	6.5J	D	B	72/B		
	195/65R16C	D/8PR	104/102T	6.0J	D	B	72/B		
	205/65R16C	D/8PR	107/105T	6.0J	D	B	72/B		
	215/65R16C	D/8PR	109/107R	6.5J	D	B	72/B		
	225/65R16C	D/8PR	112/110R	6.5J	C	B	72/B		
	235/65R16C	D/8PR	115/113R	7.0J	C	B	72/B		
	235/65R16C	F/12PR	121/119R	7.0J	C	B	72/B		
215/70R16C	C/6PR	108/106T	6.5J	D	C	72/B			
175/75R16C	D/8PR	101/99Q	5.0J	D	B	72/B			
195/75R16C	D/8PR	107/105R	5.5J	D	B	72/B			
205/75R16C	D/8PR	110/108Q	5.5J	C	B	72/B			
215/75R16C	D/8PR	113/111Q	6.0J	C	B	72/B			




H188



Benefits and Features

- Valuable commercial light truck tyre for vehicles on paved roads
- 3 rib grooves provides improved handling and comfort
- Polyester tyre casing with steel belts for good durability

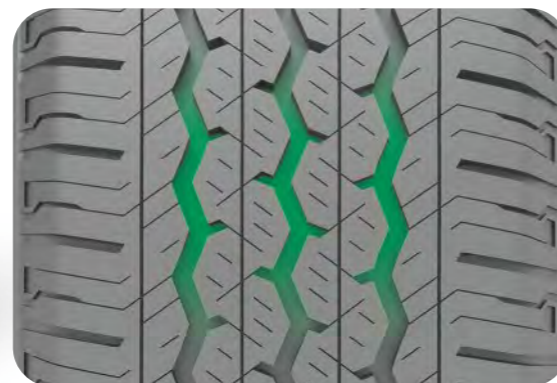

Rim Size	12 - 16
Series	60 - 75
Speed Rating	Q - H

H188

Rim (inch)	Size	LR/PR	Service Index	Standard Rim					Rim (inch)	Size	LR/PR	Service Index	Standard Rim				
12"	155R12C	C/6PR	83/81Q	4.5B	D	C	72/B		16"	195/60R16C	C/6PR	99/97H	6.0J	C	C	72/B	
13"	155R13C	D/8PR	90/88S	4.5B	D	C	72/B		215/60R16C	D/8PR	108/106T	6.5J	C	C	72/B		
	165R13C	C/6PR	91/89S	4.5B	D	C	72/B		195/65R16C	D/8PR	104/102T	6.0J	C	C	72/B		
	165/70R13C	C/6PR	88/86S	5.0J	D	C	72/B		205/65R16C	D/8PR	107/105T	6.0J	C	C	72/B		
14"	185R14C	D/8PR	102/100R	5.5J	D	C	72/B		215/65R16C	D/8PR	109/107T	6.5J	C	C	72/B		
	195R14C	D/8PR	106/104Q	5.5J	D	C	72/B		225/65R16C	D/8PR	112/110T	6.5J	C	C	72/B		
	175/70R14C	C/6PR	95/93S	5.0J	D	C	72/B		235/65R16C	D/8PR	115/113R	7.0J	C	C	72/B		
15"	195R15C	D/8PR	106/104R	5.5J	C	C	72/B		185/75R16C	D/8PR	104/102R	5.0J	C	C	72/B		
	205/65R15C	C/6PR	102/100T	6.0J	C	C	72/B		195/75R16C	D/8PR	107/105R	5.5J	C	C	72/B		
	215/65R15C	C/6PR	104/102T	6.5J	C	C	72/B		205/75R16C	D/8PR	110/108Q	5.5J	C	C	72/B		
	195/70R15C	D/8PR	104/102R	6.0J	C	C	72/B		215/75R16C	D/8PR	113/111Q	6.0J	C	C	72/B		
	205/70R15C	D/8PR	106/104R	6.0J	C	C	72/B		225/75R16C	E/10PR	118/116R	6.0J	C	C	72/B		
	215/70R15C	D/8PR	109/107R	6.5J	C	C	72/B										
	225/70R15C	D/8PR	112/110R	6.5J	C	C	72/B										



ALL Season Elite Z-401



Benefits and Features


- Divergent V-Groove provides excellent snow and water drainage performance
- ZC-Rubber's special all season tread compound ensures the longer mileage
- logical kerfs design delivers outstanding traction performance on both snow and wet surface



Rim Size	13 - 20
Series	35 - 80
Speed Rating	T - W

ALL Season Elite Z-401

Rim (inch)	Size	Service Index	Standard Rim	Icons	Rim (inch)	Size	Service Index	Standard Rim	Icons
13"	155/65R13	73T	4.5B	D C 71/B	17"	205/45R17 XL	88V	7.0J	D C 72/B
	175/65R13	80T	5.0B	D C 71/B		215/45R17 XL	91W	7.0J	C C 72/B
	155/70R13	75T	4.5B	D C 71/B		225/45R17 XL	94W	7.5J	C C 72/B
	165/70R13	79T	5.0B	D C 71/B		235/45R17 XL	97W	8.0J	C C 72/B
	155/80R13	79T	4.5B	D C 71/B		245/45R17 XL	99W	8.0J	C C 72/B
14"	185/55R14	80H	6.0J	D C 71/B	205/50R17 XL	93V	6.5J	C C 72/B	
	165/60R14 XL	79H	5.0J	D C 71/B	215/50R17 XL	95W	7.0J	C C 72/B	
	185/60R14	82H	5.5J	D C 71/B	225/50R17 XL	98W	7.0J	C C 72/B	
	155/65R14	75T	4.5J	D C 71/B	205/55R17 XL	95V	6.5J	C C 72/B	
	165/65R14	79T	5.0J	D C 71/B	215/55R17 XL	98V	7.0J	C C 72/B	
	175/65R14	82T	5.0J	D C 71/B	225/55R17 XL	101W	7.0J	C C 72/B	
	185/65R14	86H	5.5J	D C 71/B	235/55R17 XL	103W	7.5J	C C 72/B	
	165/70R14	81T	5.0J	D C 71/B	215/60R17	96H	6.5J	C C 72/B	
	175/70R14 XL	88T	5.0J	C C 71/B	225/60R17	99V	6.5J	C C 72/B	
	185/70R14	88T	5.5J	D C 71/B	235/60R17	102V	7.0J	C C 72/B	
15"	195/50R15	82V	6.0J	D C 72/B	215/65R17	99V	6.5J	C C 72/B	
	185/55R15	82H	6.0J	D C 71/B	225/65R17 XL	106H	6.5J	C C 72/B	
	195/55R15 XL	89V	6.0J	D C 72/B	235/65R17XL	108V	7.0J	C C 72/B	
	155/60R15	74T	4.5J	D C 71/B	18"	225/40R18 XL	92W	8.0J	D C 72/B
	185/60R15 XL	88H	5.5J	C C 71/B		235/40R18 XL	95W	8.5J	C C 72/B
	195/60R15	88V	6.0J	D C 72/B		245/40R18 XL	97W	8.5J	C C 72/B
	165/65R15	81T	5.0J	D C 71/B		215/45R18 XL	93W	7.0J	C C 72/B
	175/65R15	84H	5.0J	D C 71/B		225/45R18 XL	95W	7.5J	C C 72/B
	185/65R15 XL	92H	5.5J	C C 71/B		235/45R18 XL	98W	8.0J	C C 72/B
	195/65R15	91V	6.0J	C C 72/B		245/45R18 XL	100W	8.0J	C C 72/B
	195/65R15 XL	95H	6.0J	C C 72/B		225/50R18	95W	7.0J	C C 72/B
	205/65R15	94H	6.0J	C C 72/B		235/50R18 XL	101W	7.5J	C C 72/B
	215/65R15	96H	6.5J	D C 72/B		215/55R18 XL	99V	7.0J	D C 72/B
	16"	195/45R16 XL	84V	6.5J	D C 72/B	225/55R18	98V	7.0J	C C 72/B
		205/45R16 XL	87W	7.0J	D C 72/B	235/55R18	100V	7.5J	C C 72/B
215/45R16 XL		90V	7.0J	D C 72/B	235/60R18 XL	107V	7.0J	C C 72/B	
185/50R16		81H	6.0J	D C 71/B	19"	225/35R19 XL	88W	8.0J	D C 72/B
195/50R16XL		88V	6.0J	D C 72/B		235/35R19 XL	91W	8.5J	D C 72/B
185/55R16 XI		87H	6.0J	C C 71/B		255/35R19 XL	96W	9.0J	C C 73/B
195/55R16 XL		91V	6.0J	C C 72/B		225/40R19 XL	93W	8.0J	D C 72/B
205/55R16		91V	6.5J	C C 72/B		235/40R19 XL	96W	8.5J	C C 72/B
205/55R16 XL		94V	6.5J	C C 72/B		245/40R19 XL	98W	8.5J	C C 72/B
215/55R16 XL		97V	7.0J	C C 72/B		225/45R19XL	96W	7.5J	C C 72/B
225/55R16 XL		99V	7.0J	C C 72/B		235/45R19 XL	99W	8.0J	C C 72/B
195/60R16		89V	6.0J	D C 72/B		245/45R19 XL	102W	8.0J	C C 72/B
205/60R16 XL		96V	6.0J	C C 72/B		235/50R19	99V	7.5J	C C 72/B
215/60R16 XL		99V	6.5J	C C 72/B	255/50R19 XL	107W	8.0J	B C 73/B	
235/60R16		100V	7.0J	C C 72/B	225/55R19	99V	7.0J	C C 72/B	
215/65R16	98V	6.5J	C C 72/B	235/55R19 XL	105W	7.5J	C C 72/B		
215/70R16	100H	6.5J	C C 72/B	255/55R19 XL	111W	8.0J	B C 73/B		
17"	205/40R17XL	84W	7.5J	D C 72/B	20"	255/45R20 XL	105W	8.5J	B C 73/B
	215/40R17 XL	87W	7.5J	D C 72/B		265/45R20 XL	108W	9.0J	B C 73/B


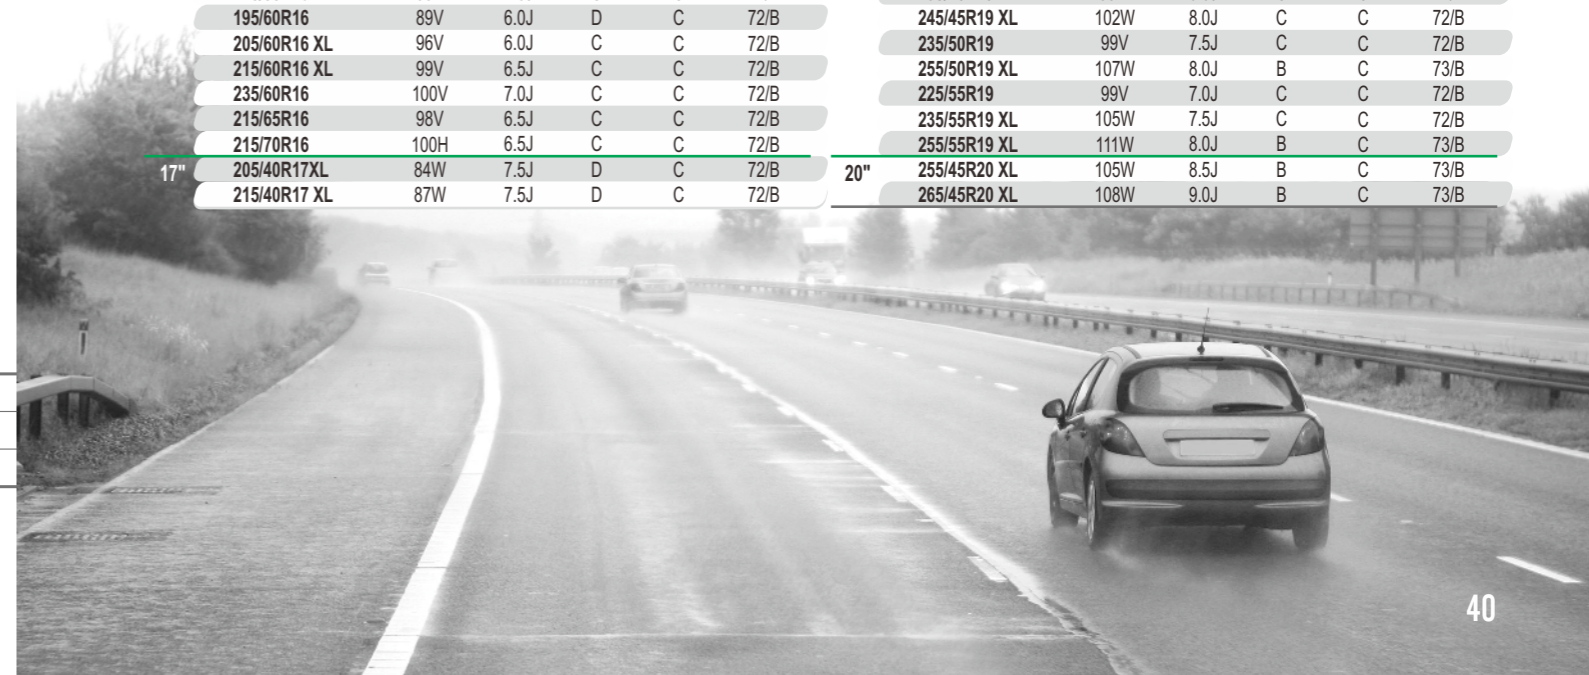


ALL Season Master SW613



Benefits and Features

- Premium commercial tyre for all season usage
- Remarkable safety through excellent grip, handling and traction in snow, mud and wet surface
- Comfortable ride and precise handling with long tread life

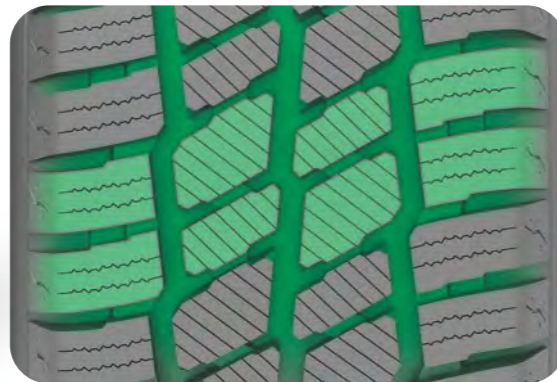

Rim Size	15 - 16
Series	60 - 75
Speed Rating	Q - T

ALL Season Master SW613

Rim (inch)	Size	Service Index	Standard Rim	Wet Traction	Dry Traction	XYdB	Rim (inch)	Size	Service Index	Standard Rim	Wet Traction	Dry Traction	XYdB
15"	195/70R15C	104/102R	6.0J	D	C	72/B	16"	215/65R16C	109/107R	6.5J	D	C	72/B
	205/70R15C	106/104R	6.0J	D	C	72/B		225/65R16C	112/110R	6.5J	D	C	72/B
	215/70R15C	109/107R	6.5J	D	C	72/B		235/65R16C	115/113R	7.0J	D	C	72/B
	225/70R15C	112/110R	6.5J	D	C	72/B		185/75R16C	104/102Q	5.0J	E	C	72/B
16"	195/60R16C	99/97T	6.0J	E	C	72/B	195/75R16C	107/105R	5.5J	D	C	72/B	
	195/65R16C	104/102T	6.0J	D	C	72/B	205/75R16C	110/108Q	5.5J	D	C	72/B	
	205/65R16C	107/105T	6.0J	D	C	72/B	215/75R16C	113/111Q	6.0J	D	C	72/B	




Zuper Snow Z-507



Benefits and Features

- Asymmetric pattern design provides superior handling on snow surface
- Optimised lateral groove angle offers strong snow performance
- Special zigzag traction sipes improves traction and braking performance on snow roads

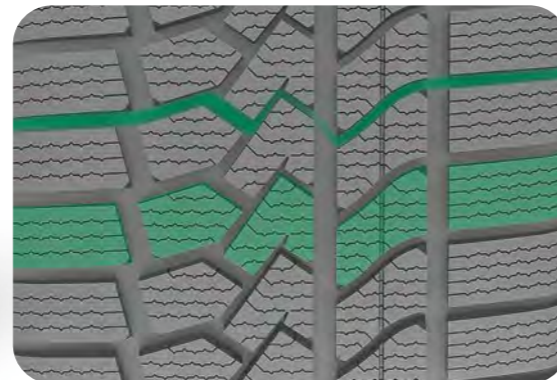

Rim Size	16 - 20
Series	35 - 70
Speed Rating	H - V

Zuper Snow Z-507

Rim (inch)	Size	Service Index	Standard Rim	Icons	Rim (inch)	Size	Service Index	Standard Rim	Icons
16"	195/45R16 XL	84V	6.5J	D C 72/B	18"	255/40R18 XL	99V	9.0J	C C 73/B
	205/45R16 XL	87V	7.0J	C C 72/B		215/45R18 XL	93V	7.0J	C C 72/B
	215/45R16	90V	7.0J	C C 72/B		225/45R18 XL	95V	7.5J	C C 72/B
	205/50R16 XL	91V	6.5J	C C 72/B		235/45R18 XL	98V	8.0J	C C 72/B
	185/55R16	83H	6.0J	C C 72/B		245/45R18 XL	100V	8.0J	C C 72/B
	205/55R16	91V	6.5J	C C 72/B		255/45R18 XL	103V	8.5J	C C 73/B
	215/55R16 XL	97H	7.0J	C C 72/B		215/50R18	92V	7.0J	C C 72/B
	225/55R16 XL	99V	7.0J	C C 72/B		225/50R18 XL	99V	7.0J	C C 72/B
	205/60R16	92H	6.0J	C C 72/B		235/50R18 XL	101V	7.5J	C C 72/B
	215/60R16 XL	99H	6.5J	C C 72/B		245/50R18 XL	104V	7.5J	C C 72/B
	225/60R16	98H	6.5J	C C 72/B		215/55R18 XL	99V	7.0J	C C 72/B
	235/60R16	100H	7.0J	C C 72/B		225/55R18 XL	102V	7.0J	C C 72/B
	215/65R16	98H	6.5J	C C 72/B		235/55R18 XL	104V	7.5J	B C 72/B
	215/70R16	100H	6.5J	C C 72/B		255/55R18 XL	109V	8.0J	B C 73/B
	235/70R16	106H	7.0J	C C 72/B		225/60R18 XL	104V	6.5J	C C 72/B
	245/70R16	107H	7.0J	C C 72/B		235/60R18 XL	107V	7.0J	B C 72/B
265/70R16	112H	8.0J	B C 72/B	19"	225/35R19 XL	88V	8.0J	C C 72/B	
17"	215/45R17 XL	91V	7.0J		C C 72/B	235/35R19 XL	91V	8.5J	C C 72/B
	225/45R17 XL	94V	7.5J		C C 72/B	255/35R19 XL	96V	9.0J	C C 73/B
	235/45R17 XL	97V	8.0J		C C 72/B	225/40R19 XL	93V	8.0J	C C 72/B
	245/45R17 XL	99V	8.0J		C C 72/B	235/40R19 XL	96V	8.5J	C C 72/B
	205/50R17 XL	93V	6.5J		C C 72/B	245/40R19 XL	98V	8.5J	C C 72/B
	215/50R17 XL	95V	7.0J		C C 72/B	255/40R19 XL	100V	9.0J	C C 73/B
	225/50R17 XL	98V	7.0J		C C 72/B	275/40R19 XL	105V	9.5J	C C 73/B
	205/55R17 XL	95V	6.5J		C C 72/B	225/45R19 XL	96V	7.5J	C C 72/B
	215/55R17 XL	98V	7.0J		C C 72/B	235/45R19 XL	99V	8.0J	C C 72/B
	225/55R17 XL	101V	7.0J		C C 72/B	245/45R19 XL	102V	8.0J	C C 72/B
	235/55R17 XL	103V	7.5J		C C 72/B	255/45R19 XL	104V	8.5J	B C 72/B
	215/60R17 XL	100V	6.5J	C C 72/B	235/50R19 XL	103V	7.5J	C C 72/B	
225/60R17 XL	103V	6.5J	C C 72/B	245/50R19 XL	105H	7.5J	B C 72/B		
235/60R17	102V	7.0J	C C 72/B	255/50R19 XL	107V	8.0J	B C 73/B		
225/65R17	102H	6.5J	C C 72/B	225/55R19	99V	7.0J	C C 72/B		
245/65R17	107H	7.0J	C C 72/B	235/55R19 XL	105V	7.5J	C C 72/B		
265/65R17	112H	8.0J	B C 73/B	255/55R19 XL	111H	8.0J	B C 72/B		
18"	225/40R18 XL	92V	8.0J	C C 72/B	20"	275/40R20 XL	106V	9.5J	B C 73/B
	235/40R18 XL	95V	8.5J	C C 72/B		255/45R20 XL	105V	8.5J	B C 72/B
	245/40R18 XL	97V	8.5J	C C 72/B		275/45R20 XL	110V	9.0J	B C 73/B




SW608



Benefits and Features

- V-shaped tread design works with high-drainage groove to drain snow, slush and water quickly
- Optimized direction of sipes maximize the tyre's contact with the road surface and delivers outstanding traction and control in all winter driving conditions
- Special winter tread compound offers performance driving




M+S



Rim Size	13 - 20
Series	30 - 80
Speed Rating	Q - V

SW608

Rim (inch)	Size	LR/PR	Service Index	Standard Rim	Icons	Rim (inch)	Size	LR/PR	Service Index	Standard Rim	Icons		
14"	185R14C	D/8PR	102/100Q	5.5J	D C	73/B	17"	205/40R17 XL	-	84V	7.5J	D C	72/B
15"	195/70R15C	D/8PR	104/102R	6.0J	D C	73/B	215/40R17 XL	-	87V	7.5J	D C	72/B	
13"	155/70R13	-	75T	4.5B	D C	71/B	245/40R17 XL	-	95V	8.5J	C C	72/B	
	165/70R13	-	79T	5.0B	D C	71/B	205/45R17 XL	-	88V	7.0J	D C	72/B	
	175/70R13	-	82T	5.0B	D C	71/B	215/45R17 XL	-	91V	7.0J	D C	72/B	
	155/80R13	-	79T	4.5B	E C	71/B	225/45R17 XL	-	94V	7.5J	C C	72/B	
14"	185/60R14	-	82H	5.5J	D C	71/B	235/45R17 XL	-	97H	8.0J	C C	72/B	
	195/60R14	-	86H	6.0J	C C	72/B	245/45R17 XL	-	99V	8.0J	D C	72/B	
	155/65R14	-	75T	4.5B	D C	71/B	205/50R17 XL	-	93H	6.5J	C C	72/B	
	175/65R14	-	82H	5.0J	D C	71/B	215/50R17 XL	-	95V	7.0J	C C	72/B	
	185/65R14	-	86H	5.5J	C C	71/B	225/50R17 XL	-	98H	7.0J	C C	72/B	
	165/70R14	-	81T	5.0J	D C	71/B	215/55R17 XL	-	98V	7.0J	C C	72/B	
	175/70R14	-	84T	5.0J	D C	71/B	225/55R17 XL	-	101V	7.0J	C C	72/B	
	185/70R14	-	88T	5.5J	D C	71/B	235/55R17 XL	-	103V	7.5J	C C	72/B	
	195/70R14	-	91T	6.0J	C C	72/B	215/60R17	-	96H	6.5J	C C	72/B	
15"	185/55R15 XL	-	86H/V	6.0J	D C	71/B	225/60R17	-	99H	6.5J	C C	72/B	
	195/55R15 XL	-	89H	6.0J	C C	72/B	235/65R17 XL	-	108H	7.0J	C C	72/B	
	185/60R15 XL	-	88H	5.5J	D C	71/B	17"	225/40R18 XL	-	92V	8.0J	D C	72/B
	195/60R15	-	88H	6.0J	D C	72/B	235/40R18 XL	-	95V	8.5J	D C	72/B	
	175/65R15	-	84T	5.0J	D C	71/B	245/40R18 XL	-	97V	8.5J	C C	72/B	
	185/65R15	-	88H	5.5J	C C	71/B	225/45R18 XL	-	95V	7.5J	D C	72/B	
	195/65R15	-	91H	6.0J	D C	72/B	235/45R18 XL	-	98V	8.0J	C C	72/B	
	205/65R15	-	94H	6.0J	C C	72/B	245/45R18 XL	-	100V	8.0J	D C	72/B	
	215/70R15	-	98H	6.5J	D C	72/B	225/50R18 XL	-	99V	7.0J	C C	72/B	
16"	195/50R16 XL	-	88H	6.0J	C C	72/B	235/50R18 XL	-	101V	7.5J	C C	72/B	
	225/50R16 XL	-	96V	7.0J	C C	72/B	245/50R18 XL	-	104V	7.5J	C C	72/B	
	195/55R16	-	87H	6.0J	C C	72/B	225/60R18 XL	-	104V	6.5J	C C	72/B	
	205/55R16	-	91H	6.5J	C C	72/B	19"	225/35R19 XL	-	88V	8.0J	D C	72/B
	215/55R16 XL	-	97H	7.0J	C C	72/B	235/45R19 XL	-	99V	8.0J	C C	72/B	
	225/55R16 XL	-	99H	7.0J	C C	72/B	245/45R19 XL	-	102V	8.0J	C C	72/B	
	205/60R16	-	92H	6.0J	C C	72/B	20"	245/30R20 XL	-	90V	8.5J	D C	72/B
	215/60R16 XL	-	99H	6.5J	C C	72/B							
	225/60R16	-	98H	6.5J	C C	72/B							
	215/65R16	-	98H	6.5J	C C	72/B							

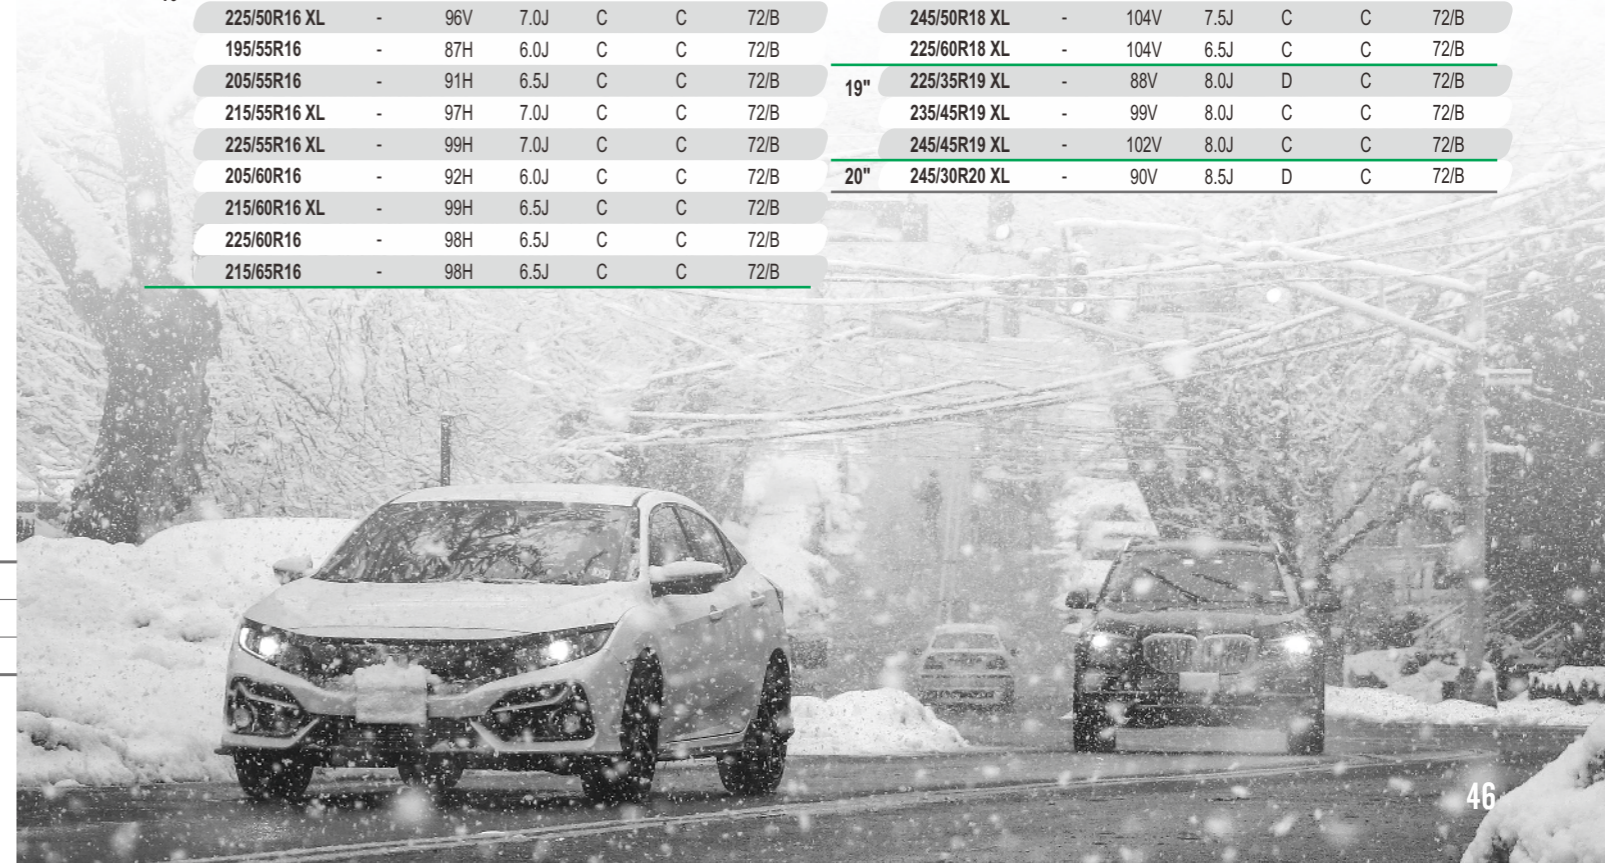


SW628



Benefits and Features

- Asymmetric pattern design provides superior handling on snow surface
- Deeper tread grooves and sipes design helps to maintain a strong traction performance in extreme road condition
- Silica-enhanced tread compound keeps rubber flexible for maximum performance in extreme cold temperatures in winter

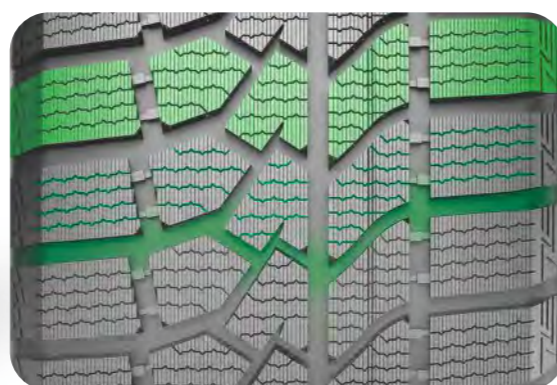

Rim Size	14 - 22
Series	35 - 75
Speed Rating	T - V

SW628

Rim (inch)	Size	Service Index	Standard Rim	Icons	Rim (inch)	Size	Service Index	Standard Rim	Icons		
14"	195/60R14	86T	6.0J	D C	72/B	18"	255/60R18 XL	112T	7.5J C C	73/B	
15"	195/50R15	82T	6.0J	E C	72/B	18"	265/60R18 XL	114T	8.0J B C	73/B	
	175/65R15	84T	5.0J	E C	71/B	18"	285/60R18	116T	8.5J C C	75/B	
	215/75R15	100T	6.0J	D C	72/B	18"	235/65R18	106T	7.0J C C	72/B	
	225/75R15	102T	6.0J	D C	72/B	18"	265/65R18	114T	8.0J C C	73/B	
	235/75R15	105T	6.5J	C C	72/B	19"	275/35R19 XL	100H	9.5J C C	73/B	
16"	205/55R16	91T	6.5J	E C	72/B		245/40R19 XL	98H	8.5J C C	72/B	
	215/55R16	93T	7.0J	D C	72/B		255/40R19 XL	100H	9.0J C C	73/B	
	205/60R16	92T	6.0J	D C	72/B		275/40R19 XL	105H	9.5J C C	73/B	
	215/60R16	95T	6.5J	E C	72/B		225/45R19 XL	96H	7.5J C C	72/B	
	235/60R16	100H	7.0J	C C	72/B		245/45R19 XL	102H	8.0J C C	72/B	
	215/70R16	100T	6.5J	D C	72/B		255/45R19 XL	104H	8.5J C C	73/B	
	225/70R16	103T	6.5J	D C	72/B		275/45R19 XL	108H	9.0J C C	73/B	
	235/70R16	106T	7.0J	C C	72/B		245/50R19 XL	105H	7.5J C C	72/B	
	245/70R16	107T	7.0J	C C	72/B		255/50R19 XL	107H	8.0J C C	73/B	
	265/70R16	112T	8.0J	C C	72/B	265/50R19 XL	110H	8.5J C C	73/B		
17"	225/45R17	91H	7.5J	D C	72/B	225/55R19	99H	7.0J D C	72/B		
	205/50R17 XL	93H	6.5J	D C	72/B	245/55R19	103H	7.5J C C	72/B		
	225/50R17	94T	7.0J	D C	72/B	275/55R19	111T	8.5J C C	73/B		
	205/55R17 XL	95H	6.5J	D C	72/B	235/60R19 XL	107T	7.0J C C	72/B		
	215/55R17	94T	7.0J	E C	72/B	255/60R19 XL	113T	7.5J C C	73/B		
	225/55R17	97T	7.0J	D C	72/B	20"	315/35R20 XL	110H	11.0J C C	75/B	
	235/55R17	99H	7.5J	D C	72/B		255/40R20 XL	101H	9.0J C C	73/B	
	215/60R17	96T	6.5J	D C	72/B		275/40R20 XL	106H	9.5J C C	73/B	
	225/60R17	99T	6.5J	D C	72/B		285/40R20	104H	10.0J C C	75/B	
	255/60R17 XL	110T	7.5J	C C	73/B		235/45R20 XL	100H	8.0J D C	72/B	
	215/65R17	99T	6.5J	C C	72/B		245/45R20 XL	103H	8.0J C C	72/B	
	225/65R17	102T	6.5J	D C	72/B		255/45R20 XL	105H	8.5J C C	73/B	
	245/65R17	107T	7.0J	D C	72/B		235/50R20 XL	104H	7.5J C C	72/B	
	265/65R17	112T	8.0J	B C	73/B		245/50R20	102H	7.5J C C	72/B	
	285/65R17	116T	8.5J	C C	75/B		265/50R20 XL	111H	8.5J B C	73/B	
245/70R17	110T	7.0J	B C	72/B	275/50R20 XL	113H	8.5J B C	73/B			
265/70R17	115T	8.0J	B C	73/B	285/50R20 XL	116H	9.0J B C	75/B			
18"	225/40R18 XL	92H	8.0J	D C	72/B	235/55R20 XL	105H	7.5J C C	72/B		
	245/40R18 XL	97H	8.5J	D C	72/B	255/55R20 XL	110H	8.0J B C	73/B		
	255/40R18 XL	99H	9.0J	C C	73/B	275/55R20 XL	117H	8.5J B C	73/B		
	215/45R18 XL	93V	7.0J	D C	72/B	21"	315/35R21 XL	111H	11.0J B C	75/B	
	245/45R18 XL	100T	8.0J	C C	72/B		295/40R21 XL	111H	10.5J C C	75/B	
	255/45R18 XL	103H	8.5J	C	73/B		255/45R21	102H	8.5J D C	73/B	
	215/50R18	92H	7.0J	D C	72/B		265/45R21	104H	9.0J C C	73/B	
	225/50R18 XL	99H	7.0J	C C	72/B		275/45R21 XL	110H	9.0J C C	73/B	
	255/55R18 XL	109H	8.0J	B C	73/B		275/50R21 XL	113H	8.5J B C	73/B	
	225/60R18 XL	104H	6.5J	C C	72/B		22"	265/40R22 XL	106H	9.5J C C	73/B
	235/60R18	103T	7.0J	D C	72/B						





SW618



Benefits and Features

- Premium studless winter tyre providing excellent snow, slush and wet traction in cold climates
- Special pattern design to promote aggressive bite in deep snow and wet road conditions
- Superior tread compound keeps rubber flexible for maximum performance in extreme cold temperatures in winter

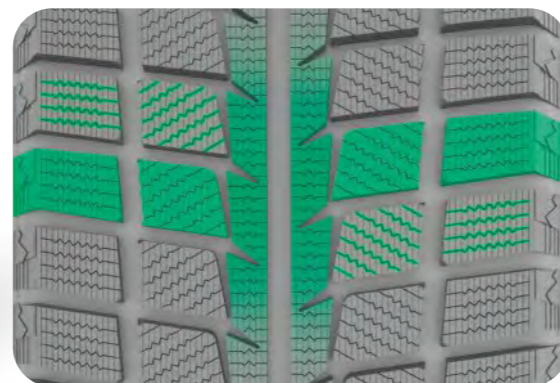

Rim Size	13 - 20
Series	30 - 70
Speed Rating	T - V

SW618

Rim (inch)	Size	Service Index	Standard Rim	Icons	Rim (inch)	Size	Service Index	Standard Rim	Icons	
13"	155/65R13	73T	4.5J	E E 71/B	16"	205/65R16	95T	6.0J	D E 72/B	
	165/65R13	77T	5.0J	E E 71/B		215/65R16	98T	6.5J	D E 72/B	
	165/70R13	79T	5.0J	E E 71/B		225/65R16	100T	6.5J	D E 72/B	
	175/70R13	82T	5.0J	E E 71/B		17"	215/45R17 XL	91V	7.0J	D E 72/B
14"	165/60R14	75T	5.0J	E E 71/B	235/45R17 XL		97T	8.0J	D E 72/B	
	185/60R14	82T	5.5J	E E 71/B	215/50R17 XL		95H	7.0J	D E 72/B	
	155/65R14	75T	4.5B	E E 71/B	225/50R17		94T	7.0J	D E 72/B	
	175/65R14	82T	5.0J	E E 71/B	235/50R17 XL	100H	7.5J	D E 72/B		
15"	185/65R14	86T	5.5J	E E 71/B	215/55R17	94T	7.0J	D E 72/B		
	165/70R14	81T	5.0J	D E 71/B	225/55R17 XL	101H	7.0J	D E 72/B		
	175/70R14	84T	5.0J	E E 71/B	235/55R17	99T	7.5J	D E 72/B		
	185/70R14	88T	5.5J	E E 71/B	225/60R17	99T	6.5J	D E 72/B		
	195/70R14	91T	6.0J	D E 72/B	225/65R17	102T	6.5J	D E 72/B		
	16"	195/50R15	82T	6.0J	E E 72/B	235/65R17	104T	7.0J	D E 72/B	
		185/55R15	82T	6.0J	E E 71/B	18"	235/40R18 XL	95V	8.5J	D E 72/B
		195/55R15	85H	6.0J	E E 72/B		225/45R18 XL	95H	7.5J	D E 72/B
		185/60R15	84T	5.5J	E E 71/B		235/45R18 XL	98T	8.0J	D E 72/B
		195/60R15	88T	6.0J	D E 72/B		245/45R18 XL	100T	8.0J	D E 72/B
		185/65R15	88T	5.5J	D E 71/B	235/50R18 XL	101T	7.5J	D E 72/B	
		195/65R15	91T	6.0J	D E 72/B	245/50R18 XL	104T	7.5J	D E 72/B	
205/65R15		94T	6.0J	D E 72/B	215/55R18 XL	99H	7.0J	D E 72/B		
205/70R15		96T	6.0J	D E 72/B	225/55R18	98H	7.0J	D E 72/B		
215/70R15		98T	6.5J	D E 72/B	235/55R18 XL	104T	7.5J	D E 72/B		
16"		195/55R16 XL	91V	6.0J	D E 72/B	245/60R18	105H	7.0J	D E 72/B	
		205/55R16	91H	6.5J	D E 72/B	19"	235/50R19	99H	7.5J	D E 72/B
	215/55R16	93T	7.0J	D E 72/B	235/55R19 XL		105H	7.5J	D E 72/B	
	225/55R16	95T	7.0J	D E 72/B	255/55R19 XL		111H	8.0J	D E 73/B	
	195/60R16	89T	6.0J	D E 72/B	20"		275/30R20 XL	97H	9.5J	D E 73/B
	205/60R16	92T	6.0J	D E 72/B		275/45R20 XL	110H	9.0J	D E 73/B	
	215/60R16	95T	6.5J	D E 72/B		255/50R20 XL	109H	8.0J	D E 73/B	
	225/60R16	98T	6.5J	D E 72/B						





SW612



Benefits and Features

- All-round winter performance for vans and other commercial vehicles
- Remarkable safety through excellent grip, handling and traction in snow, mud and wet surface
- Comfortable ride and precise handling with long tread life

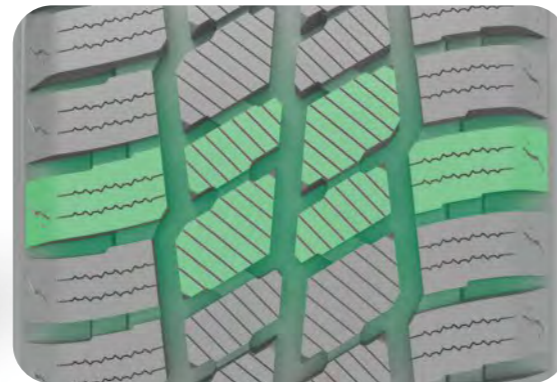

Rim Size	12 - 16
Series	60 - 75
Speed Rating	N - T

SW612

Rim (inch)	Size	LR/PR	Service Index	Standard Rim	Icons	Rim (inch)	Size	LR/PR	Service Index	Standard Rim	Icons
12"	155R12C	D/8PR	88/86Q	4.5B	E C 72/B	16"	7.00R16	F/12PR	117/116N	5.5F	D C 72/B
13"	155R13C	C/6PR	85/83Q	4.5J	D C 72/B	195/60R16C	C/6PR	99/97T	6.0J	E C 72/B	
	165R13C	C/6PR	91/89Q	4.5B	E C 72/B	195/65R16C	D/8PR	104/102T	6.0J	D C 72/B	
	175R13C	D/8PR	97/95Q	5.0B	D C 72/B	205/65R16C	D/8PR	107/105T	6.0J	D C 72/B	
14"	185R14C	D/8PR	102/100R	5.5J	D C 72/B	215/65R16C	D/8PR	109/107R	6.5J	D C 72/B	
	175/70R14C	C/6PR	95/93Q	5.0J	E C 72/B	225/65R16C	D/8PR	112/110R	6.5J	D C 72/B	
15"	195R15C	D/8PR	106/104R	5.5J	D C 72/B	235/65R16C	D/8PR	115/113R	7.0J	D C 72/B	
	205/65R15C	C/6PR	102/100T	6.0J	D C 72/B	185/75R16C	D/8PR	104/102Q	5.0J	E C 72/B	
	195/70R15C	D/8PR	104/102R	6.0J	D C 72/B	195/75R16C	D/8PR	107/105R	5.5J	D C 72/B	
	205/70R15C	D/8PR	106/104R	6.0J	D C 72/B	205/75R16C	D/8PR	110/108Q	5.5J	D C 72/B	
	215/70R15C	D/8PR	109/107R	6.5J	D C 72/B	215/75R16C	D/8PR	113/111Q	6.0J	D C 72/B	
	225/70R15C	D/8PR	112/110R	6.5J	D C 72/B	225/75R16C	E/10PR	118/116Q	6.0J	D C 72/B	
16"	6.50R16	E/10PR	108/107N	5.5F	D C 72/B						




IceMaster Spike Z-506



Benefits and Features

- Sturdable V-shaped tread design delivers outstanding traction and braking performance on snow and icy roads
- Stiff shoulder blocks deliver outstanding cornering stability and enhanced grips

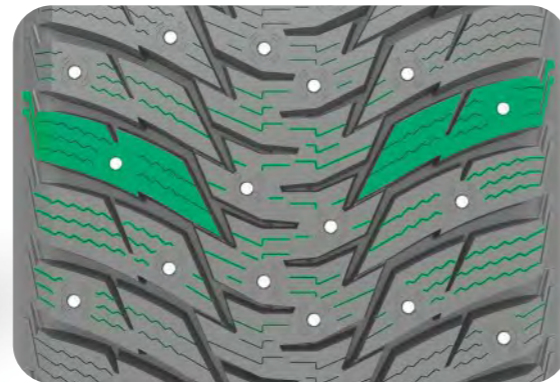

Rim Size	14 - 20
Series	35 - 70
Speed Rating	T - H

IceMaster Spike Z-506

Rim (inch)	Size	Service Index	Standard Rim	Icons	Rim (inch)	Size	Service Index	Standard Rim	Icons
14"	175/65R14 XL	86T	5.0J	/ / /	17"	215/65R17 XL	103T	6.5J	/ / /
	185/60R14	82T	5.5J	/ / /		225/65R17	102T	6.5J	/ / /
	185/65R14	86T	5.5J	/ / /		235/65R17	104T	7.0J	/ / /
	195/70R14 XL	91T	6.0J	/ / /		245/65R17 XL	111T	7.0J	/ / /
15"	195/60R15	88T	6.0J	/ / /	265/70R17	115T	8.0J	/ / /	
	185/65R15 XL	92T	5.5J	/ / /	18"	225/40R18 XL	92T	8.0J	/ / /
	195/65R15 XL	95T	6.0J	/ / /		235/40R18 XL	95T	8.5J	/ / /
	205/65R15	94T	6.0J	/ / /		245/40R18 XL	97T	8.5J	/ / /
16"	205/50R16	87T	6.5J	/ / /		225/45R18 XL	95H	7.5J	/ / /
	195/55R16	87T	6.0J	/ / /	235/45R18 XL	98T	8.0J	/ / /	
	205/55R16 XL	94T	6.5J	/ / /	245/45R18 XL	100T	8.0J	/ / /	
	215/55R16 XL	97T	7.0J	/ / /	235/50R18 XL	101T	7.5J	/ / /	
	225/55R16	95T	7.0J	/ / /	215/55R18 XL	99T	7.0J	/ / /	
	205/60R16 XL	96T	6.0J	/ / /	225/55R18 XL	102T	7.0J	/ / /	
	215/60R16	95T	6.5J	/ / /	235/55R18 XL	104T	7.5J	/ / /	
	205/65R16	95T	6.0J	/ / /	255/55R18 XL	109T	8.0J	/ / /	
	215/65R16	98T	6.5J	/ / /	225/60R18 XL	104T	6.5J	/ / /	
	215/70R16	100T	6.5J	/ / /	235/60R18 XL	107T	7.0J	/ / /	
17"	235/70R16	106T	7.0J	/ / /	19"	255/35R19 XL	96T	9.0J	/ / /
	215/45R17 XL	91T	7.0J	/ / /		275/35R19 XL	100T	9.5J	/ / /
	225/45R17 XL	94H	7.5J	/ / /		225/40R19 XL	93H	8.0J	/ / /
	235/45R17 XL	97T	8.0J	/ / /		245/40R19 XL	98T	8.5J	/ / /
	245/45R17 XL	99T	8.0J	/ / /		245/45R19 XL	102T	8.0J	/ / /
	205/50R17 XL	93T	6.5J	/ / /		255/45R19 XL	104T	8.5J	/ / /
	215/50R17 XL	95T	7.0J	/ / /		235/50R19 XL	103T	7.5J	/ / /
	225/50R17 XL	98H	7.0J	/ / /		255/50R19 XL	107T	8.0J	/ / /
	215/55R17 XL	98T	7.0J	/ / /		235/55R19	105T	7.5J	/ / /
	225/55R17 XL	101T	7.0J	/ / /		20"	315/35R20 XL	110T	11.0J
235/55R17	99T	7.5J	/ / /	275/40R20 XL	106T		9.5J	/ / /	
215/60R17	96T	6.5J	/ / /	275/55R20 XL	117T		8.5J	/ / /	
225/60R17 XL	103T	6.5J	/ / /	275/60R20	115T		8.0J	/ / /	




SW606



Benefits and Features

- Studable V-shaped tread design delivers outstanding traction and braking performance on snow and icy roads
- Stiff shoulder blocks deliver outstanding cornering stability and enhanced grips

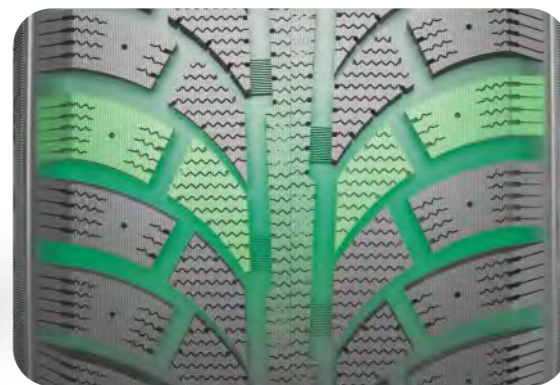

Rim Size	15 - 18
Series	65 - 85
Speed Rating	Q - R

SW606

Rim (inch)	Size	LR/PR	Service Index	Standard Rim	Rolling Noise (dB)	Wet Grip	Ice & Snow	Rim (inch)	Size	LR/PR	Service Index	Standard Rim	Rolling Noise (dB)	Wet Grip	Ice & Snow
15"	195/70R15C	D/8PR	104/102R	6.0J	/	/	/	17"	LT245/70R17	E/10PR	119/116Q	7.0J	/	/	/
	225/70R15C	D/8PR	112/110R	6.5J	/	/	/		LT265/70R17	E/10PR	121/118Q	8.0J	/	/	/
	185/75R16C	D/8PR	104/102R	5.0J	/	/	/		LT285/70R17	E/10PR	121/118Q	8.5J	/	/	/
16"	LT225/75R16	E/10PR	115/112Q	6.0J	/	/	/	LT245/75R17	E/10PR	121/118Q	7.0J	/	/	/	
	LT245/75R16	E/10PR	120/116Q	7.0J	/	/	/	LT235/80R17	E/10PR	120/117Q	6.5J	/	/	/	
	LT265/75R16	E/10PR	123/120Q	7.5J	/	/	/	18"	LT275/65R18	E/10PR	123/120Q	8.0J	/	/	/
LT235/85R16	E/10PR	120/116Q	6.5J	/	/	/	LT275/70R18		E/10PR	125/122Q	8.0J	/	/	/	




TRAILER ST 290



Benefits and Features

- Radial construction tyres applicable for trailer service
- Long-life and low rolling resistance compound to offer long original treadwear and to promote fuel economy
- The reinforced sidewalls ensure a cool, long lasting tyre

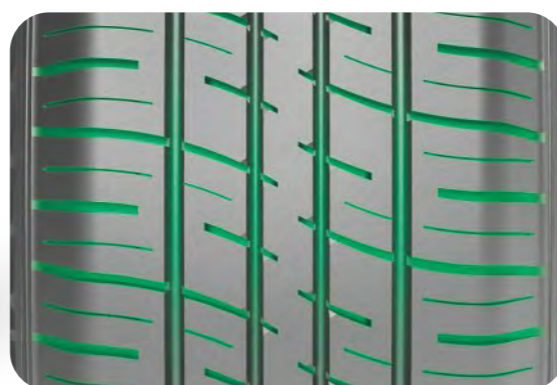

Rim Size	10 - 14
Series	50 - 80
Speed Rating	N

TRAILER ST 290

Rim (inch)	Size	Service Index	Standard Rim	Icons	Rim (inch)	Size	Service Index	Standard Rim	Icons	
13"	135/80R13	74N	3.50B	D C 70/B	10"	195/55R10C	98/96N	6.00I	C C 72/B	
	145/80R13	79N	4.00B	C C 70/B		12"	185/60R12C	104/101N	5 1/2J	C C 72/B
	155/80R13	84N	4.50B	C C 70/B			195/60R12C	104/102N	6J	C C 72/B
	155/70R13	75N	4.50B	C C 70/B			155/70R12C	104/102N	4 1/2J	C C 72/B
	165/70R13	79N	5.00B	C C 70/B		13"	195/50R13C	104/101N	6J	C C 72/B
175/70R13	86N	5.00B	C C 70/B	155R13C	90/88N		4.50B	C C 72/B		
185/70R13	86N	5 1/2J	C C 70/B	165R13C	94/92N		4.50B	C C 72/B		
14"	195/70R14	96N	6J	C C 70/B	14"	185R14C	104/102N	5 1/2J	C C 72/B	
						195R14C	106/104N	5 1/2J	C C 72/B	



UHP / PASSENGER / SUV

Rim (inch)	Series	Size	Pattern	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)					
13"	65er	155/65R13	Z-107	73T	4.5B	157	532	365	300	D	B	70/B		
		70er	155/70R13	Z-107	75T	4.5J	157	548	387	300	D	B	70/B	
		165/70R13	Z-107	79T	5.0J	170	562	437	300	D	B	70/B		
		175/70R13	Z-107	82T	5.0J	177	576	475	300	D	B	70/B		
		185/70R13	Z-107	86T	5.5J	189	590	530	300	D	B	70/B		
	80er	155/80R13	Z-107	79T	4.5J	157	578	437	300	D	B	70/B		
		165/80R13	Z-107	83T	4.5B	165	594	487	240	D	B	70/B		
		14"	55er	185/55R14	Z-107	80V	6.0J	194	560	450	300	D	B	70/B
				60er	165/60R14	Z-107	75H	5.0J	170	554	387	300	D	B
			65er	175/60R14	Z-107	79H	5.0J	177	566	437	300	D	B	70/B
185/60R14	Z-107			82H	5.5J	189	578	475	300	D	B	70/B		
155/65R14	Z-107			75T	4.5J	157	558	387	300	D	B	70/B		
70er	165/65R14	Z-107	79T	5.0J	170	570	437	300	D	B	70/B			
	175/65R14	Z-107	82H/T	5.0J	177	584	475	300	D	B	70/B			
	185/65R14	Z-107	86H	5.5J	189	596	530	300	D	B	70/B			
	195/65R14	Z-107	89H	6.0J	201	610	580	300	D	B	71/B			
	165/70R14	Z-107	81T	5.0J	170	588	462	300	D	B	70/B			
	175/70R14	Z-107	84T	5.0J	177	602	500	300	D	B	70/B			
	185/70R14	Z-107	88T	5.5J	189	616	560	300	C	B	70/B			
	195/70R14	Z-107	91T	6.0J	201	630	615	300	C	B	71/B			
	205/70R14	Z-107	95T	6.0J	209	644	690	300	C	B	71/B			
	15"	45er	195/45R15	Z-107	78V	6.5J	195	557	425	300	D	B	71/B	
50er			195/50R15	SPORT RS	82V	6.0J	201	577	475	300	/	/	/	
			195/50R15	SA57	82V	6.0J	201	577	475	300	D	B	71/B	
			195/50R15	Z-107	82V	6.0J	201	577	475	300	D	B	71/B	
			205/50R15 XL	SPORT RS	89V	6.5J	214	587	580	350	/	/	/	
55er		175/55R15	Z-107	77H	5.5J	182	573	412	300	D	B	70/B		
		185/55R15	Z-107	82V/H	6.0J	194	560	450	300	D	B	70/B		
		195/55R15	SA57	85V	6.0J	201	595	515	300	D	B	71/B		
		195/55R15	Z-107	85V/H	6.0J	201	595	515	300	D	B	71/B		
		60er	175/60R15	Z-107	81H	5.0J	177	591	462	300	D	B	70/B	
155/60R15	Z-107		74H	4.5B	157	567	375	300	D	B	70/B			
185/60R15	Z-107		84H	5.5J	189	603	500	300	D	B	70/B			
195/60R15	Z-107		88V/H	6.0J	201	615	560	300	D	B	71/B			
205/60R15	Z-107		91H	6.0J	209	627	615	300	C	B	71/B			
65er	165/65R15	Z-107	81H	5.0J	170	595	462	300	D	B	70/B			
	175/65R15	Z-107	84H	5.0J	177	609	500	300	D	B	70/B			
	185/65R15	SA37	88H	5.5J	189	621	560	300	D	B	70/B			
	185/65R15	Z-107	88H/T	5.5J	189	621	560	300	D	B	70/B			
	195/65R15	SA37	91V	6.0J	201	635	615	300	D	B	71/B			
	195/65R15	Z-107	91V/H/T	6.0J	201	635	615	300	C	B	71/B			
	205/65R15	Z-107	94V	6.0J	209	647	670	300	C	B	71/B			
	205/65R15	SL369	94H	6.0J	209	647	670	300	D	D	71/B			
	215/65R15	Z-107	96H	6.5J	221	661	710	300	C	B	71/B			
	70er	205/70R15	Z-107	96H	6.0J	209	669	710	300	C	B	71/B		
205/70R15		SL369	96H	6.0J	209	669	710	300	D	D	71/B			
215/70R15		Z-107	98H	6.5J	221	683	750	300	C	B	71/B			
225/70R15		SU318	100T	6.5J	228	697	800	300	D	C	71/B			
225/70R15		SL369	100T	6.5J	228	697	800	300	D	D	71/B			
235/70R15		SU318	103T	7.0J	240	711	875	300	D	C	71/B			
235/70R15		SL369	103S	7.0J	240	711	875	300	D	D	71/B			
265/70R15		SU318	112T	8.0J	272	753	1120	300	C	C	72/B			
265/70R15		SL369	112T	8.0J	272	753	1120	300	D	D	72/B			
75er		215/75R15	SU318	100T	6.0J	216	703	800	300	D	C	71/B		
	P215/75R15	SL369	100S	6.0J	216	703	800	300	D	D	71/B			
	225/75R15	SU318	102H	6.0J	223	719	850	300	D	C	71/B			
	235/75R15	SU318	105H	6.5J	235	733	925	300	D	C	71/B			
	235/75R15 XL	SL369	109S	6.5J	235	733	1030	350	D	D	72/B			
	265/75R15	SU318	112T	7.5J	267	779	1120	300	C	C	72/B			
	16"	40er	215/40R16 XL	Z-107	86W	7.5J	218	578	530	350	D	B	72/B	
			45er	195/45R16 XL	SA37	84V	6.5J	195	582	500	350	D	B	72/B
				195/45R16 XL	Z-107	84V	6.5J	195	582	500	350	D	B	72/B
				205/45ZR16 XL	SPORT RS	87W	7.0J	206	590	545	350	/	/	/
205/45R16 XL				Z-107	87W	7.0J	206	590	545	350	D	B	72/B	
215/45R16 XL		Z-107	90W	7.0J	213	600	600	350	D	B	72/B			
50er		185/50R16	Z-107	81V	6.0J	194	592	462	300	D	B	70/B		
		195/50R16	Z-107	84V	6.0J	201	602	500	300	D	B	71/B		
		205/50R16	SA37	87W	6.5J	214	612	545	300	D	B	71/B		
		205/50R16	SA57	87W	6.5J	214	612	545	300	D	B	71/B		
	205/50R16	Z-107	87V	6.5J	214	612	545	300	D	B	71/B			

UHP / PASSENGER / SUV

Rim (inch)	Series	Size	Pattern	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)				
16"	50er	225/50R16 XL	SPORT RS	96W	7.0J	233	632	710	350	/	/	/	
		225/50R16	SA37	92W	7.0J	233	632	630	300	D	B	71/B	
		225/50R16	SA57	92W	7.0J	233	632	630	300	D	B	71/B	
		55er	185/55R16	Z-107	83V	6.0J	194	610	487	300	C	B	70/B
			195/55R16	Z-107	87V/H	6.0J	201	620	545	300	D	B	71/B
	205/55R16		SA37	91V	6.5J	214	632	615	300	D	B	71/B	
	60er	205/55R16 XL	SA37	94W	6.5J	214	632	670	350	D	B	72/B	
		205/55R16 XL	SA57	94W	6.5J	214	632	670	350	D	B	72/B	
		215/55R16	SA37	93V	7.0J	226	642	650	300	D	B	71/B	
		215/55R16 XL	SA57	97W	7.0J	226	642	730	350	D	B	72/B	
215/55R16		Z-107	93V	7.0J	226	642	650	300	C	B	71/B		
215/55R16 XL		Z-107	97W	7.0J	226	642	730	350	C	B	72/B		
225/55R16 XL		SA37	99W	7.0J	233	654	775	350	D	B	72/B		
225/55R16 XL		SA57	99W	7.0J	233	654	775	350	D	B	72/B		
225/55R16		Z-107	95V	7.0J	233	654	690	300	C	B	71/B		
225/55R16 XL		Z-107	99W	7.0J	233	654	750	350	C	B	72/B		
65er	195/60R16	Z-107	89V	6.0J	201	640	580	300	C	B	71/B		
	205/60R16	Z-107	92V/H	6.0J	209	652	630	300	C	B	71/B		
	205/60R16	SL369	92H	6.0J	209	652	630	300	D	D	71/B		
	215/60R16 XL	Z-107	99V	6.5J	221	664	775	350	C	B	72/B		
	225/60R16	Z-107	98H	6.5J	228	676	750	300	C	B	71/B		
	235/60R16	Z-107	100H	7.0J	240	688	800	300	C	B	71/B		
	235/60R16	SL369	100T	7.0J	240	688	800	300	D	D	71/B		
	70er	205/65R16	Z-107	95H	6.0J	209	672	690	300	C	B	71/B	
		215/65R16	Z-107	98H/V	6.5J	221	686	750	300	C	B	71/B	
		255/65R16	SU318	109H	7.5J	260	738	1030	300	C	C	72/B	
215/70R16		SU318	100H	6.5J	221	708	800	300	D	C	71/B		
215/70R16		SL369	100S	6.5J	221	708	800	300	D	D	71/B		
75er	225/70R16	SU318	103H	6.5J	228	722	875	300	D	C	71/B		
	225/70R16	SL369	103S	6.5J	228	722	875	300	D	D	71/B		
	235/70R16	SU318	106H	7.0J	240	736	950	300	D	C	71/B		
	235/70R16	SL369	106S	7.0J	240	736	950	300	D	D	71/B		
	245/70R16 XL	SU318	111H	7.0J	248	750	1090	350	D	C	72/B		
	245/70R16 XL	SL369	111S	7.0J	248	750	1090	350	D	D	72/B		
	255/70R16	SU318	111T	7.5J	260	764	1090	300	C	C	72/B		
	255/70R16	SL369	111T	7.5J	260	764	1						





UHP / PASSENGER / SUV

Rim (inch)	Series	Size	Pattern	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	EV	EV	EV
17"	45er	215/45ZR17	SPORT RS	87W	7.0J	213	626	545	300	/	/	/
		215/45ZR17 XL	SOLMAX1	91Y	7.0J	213	626	615	350	D	A	72/B
		215/45ZR17 XL	SA37	91Y	7.0J	213	626	615	350	D	B	72/B
		215/45ZR17 XL	SA57	91W	7.0J	213	626	615	350	D	B	72/B
		215/45R17 XL	Z-107	91W	7.0J	213	626	615	350	D	B	72/B
		225/45ZR17 XL	SPORT RS	94W	7.5J	225	634	670	350	/	/	/
		225/45ZR17 XL	SPORT DS ^{II}	94W	7.5J	225	634	670	350	/	/	/
		225/45R17 XL	SOLMAX1 ZRT	94W	7.5J	225	634	670	350	D	B	72/B
		225/45R17 XL	SOLMAX1	94Y	7.5J	225	634	670	350	C	A	72/B
		225/45ZR17 XL	SA37	94Y	7.5J	225	634	670	350	D	B	72/B
		225/45ZR17 XL	SA57	94W	7.5J	225	634	670	350	D	B	72/B
		225/45R17 XL	Z-107	94W	7.5J	225	634	670	350	C	B	72/B
		235/45ZR17	SPORT RS	94W	8.0J	236	644	670	300	/	/	/
		235/45ZR17 XL	SOLMAX1	97Y	8.0J	236	644	730	350	C	A	72/B
		235/45ZR17 XL	SA37	97Y	8.0J	236	644	730	350	D	B	72/B
		235/45R17 XL	SA57	97W	8.0J	236	644	730	350	D	B	72/B
	235/45R17 XL	Z-107	97W	8.0J	236	644	730	350	C	B	72/B	
	245/45ZR17 XL	SOLMAX1	99Y	8.0J	243	652	775	350	C	A	72/B	
	245/45R17 XL	SA37	99W	8.0J	243	652	775	350	D	B	72/B	
	245/45R17 XL	Z-107	99W	8.0J	243	652	775	350	C	B	72/B	
	255/45R17 XL	SOLMAX1 ZRT	102W	8.5J	255	662	850	350	D	B	73/B	
	255/45R17	SOLMAX1	98Y	8.5J	255	662	750	300	C	A	72/B	
	255/45ZR17 XL	SA37	102W	8.5J	255	662	850	350	D	B	73/B	
	50er	205/50R17 XL	SOLMAX1 ZRT	93W	6.5J	214	638	650	350	D	B	72/B
			SOLMAX1	93W	6.5J	214	638	650	350	C	A	72/B
			SA37	93W	6.5J	214	638	650	350	C	B	72/B
			SA57	93W	6.5J	214	638	650	350	D	B	72/B
			Z-107	93W	6.5J	214	638	650	350	C	B	72/B
			SOLMAX1	91W	7.0J	226	648	615	300	D	A	71/B
			SA37	95W	7.0J	226	648	690	350	C	B	72/B
			SA57	95W	7.0J	226	648	690	350	D	B	72/B
			Z-107	95W	7.0J	226	648	690	350	C	B	72/B
SOLMAX1 ZRT			98W	7.0J	233	658	750	350	D	B	72/B	
SOLMAX1			98W	7.0J	233	658	750	350	C	A	72/B	
SA37			98W	7.0J	233	658	750	350	D	B	72/B	
SA57		98W	7.0J	233	658	750	350	D	B	72/B		
Z-107		98W	7.0J	233	658	750	350	C	B	72/B		
SOLMAX1		96W	7.5J	245	668	710	300	C	A	71/B		
SA37		96V	7.5J	245	668	710	300	D	B	71/B		
55er		205/55R17 XL	SOLMAX1 ZRT	95W	6.5J	214	658	690	350	D	B	72/B
			SA37	95W	6.5J	214	658	690	350	D	B	72/B
			Z-107	95W	6.5J	214	658	690	350	C	B	72/B
			SOLMAX1	98W	7.0J	226	668	750	350	C	A	72/B
			SA37	98W	7.0J	226	668	750	350	D	B	72/B
			SA57	98W	7.0J	226	668	750	350	D	B	72/B
			Z-107	98W	7.0J	226	668	750	350	C	B	72/B
			SOLMAX1 ZRT	101W	7.0J	233	680	825	350	D	B	72/B
	SOLMAX1		101W	7.0J	233	680	825	350	C	A	72/B	
	SA37		101W	7.0J	233	680	825	350	C	B	72/B	
	SA57		101W	7.0J	233	680	825	350	D	B	72/B	
	Z-107		101W	7.0J	233	680	825	350	C	B	72/B	
SOLMAX1	103W	7.5J	245	690	875	350	C	A	72/B			
SA37	103W	7.5J	245	690	875	350	C	B	72/B			
SA57	103W	7.5J	245	690	875	350	D	B	72/B			
Z-107	99V	7.5J	245	690	775	300	C	B	71/B			
Z-107	103W	7.5J	245	690	875	350	C	B	72/B			
60er	215/60R17	Z-107	96V/H	6.5J	221	690	710	300	C	B	71/B	
		SOLMAX1 SUV	96V	6.5J	221	690	710	300	D	C	71/B	
		SU318	96H	6.5J	221	690	710	300	D	C	71/B	
		SOLMAX1 SUV	103V	6.5J	228	702	875	350	C	C	72/B	
		SU318	103V	6.5J	228	702	875	350	D	C	72/B	
		SOLMAX1 SUV	102V	7.0J	240	714	850	300	C	C	71/B	
	235/60R17	SU318	102T	7.0J	240	714	850	300	D	C	71/B	
		SOLMAX1 SUV	110V	7.5J	260	738	1060	350	C	C	73/B	
		SU318	110V	7.5J	260	738	1060	350	C	C	73/B	
		SU318	108H	8.0J	272	750	1000	300	C	C	72/B	
		SU318	110T	8.0J	279	762	1060	300	C	C	72/B	
		SOLMAX1 SUV	99V	6.5J	221	712	775	300	B	C	71/B	
	65er	215/65R17	SU318	99H	6.5J	221	712	775	300	D	C	71/B
			SOLMAX1 SUV	106V	6.5J	228	724	950	350	C	C	72/B





UHP / PASSENGER / SUV

Rim (inch)	Series	Size	Pattern	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	EV	EV	EV		
17"	65er	225/65R17 XL	SU318	106V	6.5J	228	724	950	350	D	C	72/B		
		225/65R17	SL369	102T	6.5J	228	724	850	300	D	D	71/B		
		235/65R17	Z-107	104V	7.0J	240	738	900	300	C	B	71/B		
		235/65R17 XL	Z-107	108V	7.0J	240	738	1000	350	C	B	72/B		
		235/65R17 XL	SOLMAX1 SUV	108V	7.0J	240	738	1000	350	C	C	72/B		
		235/65R17 XL	SU318	108V	7.0J	240	738	1000	350	D	C	72/B		
		235/65R17	SL369	104S	7.0J	240	738	900	300	D	D	71/B		
		245/65R17	SOLMAX1 SUV	107H	7.0J	248	750	975	300	C	C	71/B		
		245/65R17	SU318	107H	7.0J	248	750	975	300	D	C	71/B		
		245/65R17	SL369	107S	7.0J	248	750	975	300	D	D	71/B		
		255/65R17	SU318	110H	7.5J	260	764	1060	300	C	C	72/B		
		255/65R17	SL369	110T	7.5J	260	764	1060	300	D	D	72/B		
		265/65R17	SOLMAX1 SUV	112H	8.0J	272	776	1120	300	C	C	72/B		
		265/65R17	SU318	112T	8.0J	272	776	1120	300	C	C	72/B		
		265/65R17	SL369	112S	8.0J	272	776	1120	300	D	D	72/B		
		275/65R17	SOLMAX1 SUV	115H	8.0J	279	790	1215	300	C	C	72/B		
		275/65R17	SU318	115T	8.0J	279	790	1215	300	C	C	72/B		
		285/65R17	SOLMAX1 SUV	116H	8.5J	292	802	1250	300	C	C	74/B		
		285/65R17	SU318	116H	8.5J	292	802	1250	300	C	C	74/B		
		70er	215/70R17	SOLMAX1 SUV	101H	6.5J	221	734	825	300	C	C	71/B	
				SL369	108S	6.5J	228	748	1000	350	D	D	72/B	
				SU318	110T	7.0J	248	776	1060	300	D	C	71/B	
				SL369	110T	7.0J	248	776	1000	300	D	D	71/B	
				SU318	112T	7.5J	260	790	1120	300	C	C	72/B	
	SL369			112T	7.5J	260	790	1120	300	D	D	72/B		
	SU318			115T	8.0J	272	804	1215	300	C	C	72/B		
	SL369			115T	8.0J	272	804	1215	300	D	D	72/B		
	SL369			117T	8.5J	292	832	1285	300	D	D	74/B		
	75er			235/75R17	SL369	109T	6.5J	235	784	1030	300	D	D	71/B
					SL369	112T	7.0J	248	800	1120	300	D	D	71/B
					SL369	115T	7.0J	255	814	1215	300	D	D	72/B
	18"	35er	215/35ZR18 XL	SA37	84W	7.5J	218	607	500	350	D	B	72/B	
			225/35ZR18 XL	SA37	87Y	8.0J	230	615	545	350	D	B	72/B	
			245/35ZR18 XL	SA37	92W	8.5J	248	629	630	350	D	B	72/B	
			255/35ZR18 XL	SPORT DS ^{II}	94W	9.0J	260	635	670	350	/	/	/	
			255/35R18 XL	SOLMAX1 ZRT	94W	9.0J	260	635	670	350	D	B	73/B	
			255/35ZR18 XL	SOLMAX1	94Y	9.0J	260	635	670	350	D	A	73/B	
			265/35ZR18 XL	SPORT RS ^{II} /SPORT RS	97W	9.5J	271	643	730	350	/	/	/	
			265/35ZR18 XL	SPORT DS ^{II}	97W	9.5J	271	643	730	350	/	/	/	
			265/35ZR18 XL	SA37	97Y	9.5J	271	643	730	350	D	B	73/B	
			265/35ZR18 XL	SA57	97W	9.5J	271	643	730	350	D	B	73/B	
			265/35ZR18 XL	Z-107	97W	9.5J	271	643	730	350	C	B	73/B	
			285/35ZR18 XL	SPORT RS ^{II} /SPORT RS	101W	10.0J	290	657	825	350	/	/	/	
	40er	205/40R18 XL	Z-107	86V	7.5J	212	621	530	350	D	B			

UHP / PASSENGER / SUV

Rim (inch)	Series	Size	Pattern	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)						
18"	45er	215/45R18 XL	Z-107	93W	7.0J	213	651	650	350	D	B	72/B			
		225/45R18 XL	SOLMAX1 ZRT	95W	7.5J	225	659	690	350	D	B	72/B			
		225/45ZR18 XL	SOLMAX1	95Y	7.5J	225	659	690	350	C	A	72/B			
		225/45ZR18 XL	SA37	95Y	7.5J	225	659	690	350	D	B	72/B			
		225/45R18 XL	SA57	95W	7.5J	225	659	690	350	D	B	72/B			
		225/45R18 XL	Z-107	95W	7.5J	225	659	690	350	C	B	72/B			
		235/45ZR18 XL	EV SOLMAX1	98Y	8.0J	236	669	750	350	C	A	72/B			
		235/45ZR18 XL	SA37	98Y	8.0J	236	669	750	350	D	B	71/B			
		235/45ZR18 XL	SA57	98W	8.0J	236	669	750	350	D	B	72/B			
		235/45R18 XL	Z-107	98W	8.0J	236	669	750	350	C	B	72/B			
		245/45R18 XL	SOLMAX1 ZRT	100W	8.0J	243	677	800	350	D	B	72/B			
		245/45ZR18 XL	SOLMAX1	100Y	8.0J	243	677	800	350	C	A	72/B			
		245/45ZR18 XL	SA37	100Y	8.0J	243	677	800	350	D	B	72/B			
		245/45ZR18 XL	SA57	100W	8.0J	243	677	800	350	D	B	72/B			
		245/45R18 XL	Z-107	100W	8.0J	243	677	800	350	C	B	72/B			
		255/45R18 XL	SOLMAX1 ZRT	103W	8.5J	255	687	875	350	D	B	73/B			
		255/45ZR18	SOLMAX1	99Y	8.5J	255	687	775	300	C	A	72/B			
		255/45ZR18	SA37	99W	8.5J	255	687	775	300	D	B	72/B			
	265/45ZR18	SOLMAX1	101Y	9.0J	266	695	825	300	C	A	72/B				
	275/45ZR18 XL	SOLMAX1	107Y	9.0J	273	705	975	350	C	A	73/B				
	50er	50er	215/50R18	SOLMAX1	92W	7.0J	226	673	630	300	C	A	71/B		
			225/50R18 XL	SOLMAX1 ZRT	99W	7.0J	233	683	775	350	D	B	72/B		
			225/50R18	SOLMAX1	95W	7.0J	233	683	690	300	C	A	71/B		
			225/50R18	SA37	95W	7.0J	233	683	690	300	D	B	71/B		
			225/50R18	SA57	95W	7.0J	233	683	690	300	D	B	71/B		
			235/50R18 XL	SOLMAX1 ZRT	101V	7.5J	245	693	825	350	D	B	72/B		
			235/50R18 XL	SOLMAX1	101W	7.5J	245	693	825	350	C	A	72/B		
			235/50R18 XL	SA37	101V	7.5J	245	693	825	350	C	B	72/B		
			235/50R18 XL	SA57	101W	7.5J	245	693	825	350	D	B	72/B		
			235/50R18	Z-107	97V	7.5J	245	693	730	300	D	B	71/B		
			235/50R18	SU318	97V	7.5J	245	693	730	300	D	C	71/B		
			245/50R18 XL	SOLMAX1 ZRT	104W	7.5J	253	703	900	350	D	B	72/B		
		245/50R18	SOLMAX1	100W	7.5J	253	703	800	300	C	A	71/B			
		245/50R18	SA37	100W	7.5J	253	703	800	300	C	B	71/B			
		55er	EV	215/55R18 XL	SOLMAX1	99V	7.0J	226	693	775	350	B	A	72/B	
				215/55R18 XL	SA37	99V	7.0J	226	693	775	350	C	B	72/B	
215/55R18 XL				Z-107	99V	7.0J	226	693	775	350	C	B	72/B		
225/55R18 XL				EV SOLMAX1	102W	7.0J	233	705	850	350	B	A	72/B		
225/55R18				Z-107	98V	7.0J	233	705	750	300	C	B	71/B		
225/55R18				SU318	98V	7.0J	233	705	750	300	D	C	71/B		
55er			EV	235/55R18 XL	SOLMAX1 ZRT	104V	7.5J	245	715	900	350	D	B	72/B	
				235/55R18	EV SOLMAX1	100W	7.5J	245	715	800	300	B	A	71/B	
				235/55R18	Z-107	100HV	7.5J	245	715	800	300	C	B	71/B	
			235/55R18	SU318	100V	7.5J	245	715	800	300	D	C	71/B		
	255/55R18 XL		SOLMAX1 ZRT	109W	8.0J	265	737	1030	350	D	B	73/B			
	255/55R18 XL		SOLMAX1	109W	8.0J	265	737	1030	350	C	A	73/B			
255/55R18 XL	SA57	109V	8.0J	265	737	1030	350	D	B	73/B					
255/55R18 XL	SU318	109V	8.0J	265	737	1030	350	C	C	73/B					
60er	60er	225/60R18	Z-107	100H	6.5J	228	727	800	300	D	B	71/B			
		225/60R18	SOLMAX1 SUV	100H	6.5J	228	727	800	300	D	C	71/B			
		225/60R18	SU318	100V	6.5J	228	727	800	300	D	C	71/B			
		235/60R18 XL	Z-107	107V	7.0J	240	739	975	350	D	B	71/B			
		235/60R18 XL	EV SOLMAX1 SUV	107V	7.0J	240	739	975	350	B	C	72/B			
		235/60R18	SU318	103V	7.0J	240	739	875	300	D	C	71/B			
		245/60R18	SOLMAX1 SUV	105H	7.0J	248	751	925	300	C	C	71/B			
		245/60R18	SU318	105T	7.0J	248	751	925	300	D	C	71/B			
		255/60R18 XL	Z-107	112V	7.5J	260	763	1120	350	C	B	73/B			
	255/60R18 XL	SOLMAX1 SUV	112V	7.5J	260	763	1120	350	C	C	73/B				
	255/60R18 XL	SU318	112V	7.5J	260	763	1120	350	C	C	73/B				
	265/60R18	SA57	110V	8.0J	272	775	1060	300	C	B	72/B				
	265/60R18 XL	SOLMAX1 SUV	114V	8.0J	272	775	1180	350	C	C	73/B				
	265/60R18 XL	SU318	114V	8.0J	272	775	1180	350	C	C	73/B				
	265/60R18	SL369	110T	8.0J	272	775	1060	300	D	D	72/B				
	285/60R18	SOLMAX1 SUV	116V	8.5J	292	799	1250	300	C	C	74/B				
	285/60R18	SU318	116H	8.5J	292	799	1250	300	C	C	74/B				
	65er	EV	235/65R18	EV SOLMAX1 SUV	106H	7.0J	240	763	950	300	B	C	71/B		
265/65R18			SOLMAX1 SUV	114T	8.0J	272	801	1180	300	C	C	72/B			
265/65R18			SL369	114T	8.0J	272	801	1180	300	D	D	72/B			
275/65R18		SL369	116T	8.0J	279	815	1250	300	D	D	72/B				
19"		30er	255/30ZR19 XL	SOLMAX1	91Y	9.0J	260	637	615	350	D	A	73/B		

UHP / PASSENGER / SUV

Rim (inch)	Series	Size	Pattern	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)					
19"	30er	265/30ZR19 XL	SA37	93Y	9.5J	271	643	650	350	D	B	73/B		
		275/30ZR19 XL	SPORT RS	96W	9.5J	278	649	710	350	/	/	/		
		275/30ZR19 XL	SA37	96Y	9.5J	278	649	710	250	D	B	73/B		
		285/30R19 XL	SOLMAX1 ZRT	98W	10.0J	290	655	750	350	D	B	75/B		
		35er	215/35ZR19 XL	SA57	85W	7.5J	218	633	515	350	D	B	72/B	
			225/35ZR19 XL	SA57	88W	8.0J	230	641	560	350	D	B	72/B	
	225/35ZR19 XL		Z-107	88W	8.0J	230	641	560	350	D	B	72/B		
	235/35ZR19 XL		SPORT RS	91W	8.5J	241	647	615	350	/	/	/		
	235/35ZR19 XL		SOLMAX1	91Y	8.5J	241	647	615	350	D	A	72/B		
	235/35ZR19 XL		SA37	91Y	8.5J	241	647	615	350	D	B	72/B		
	235/35ZR19 XL		Z-107	91W	8.5J	241	647	615	350	D	B	72/B		
	245/35R19 XL		SOLMAX1 ZRT	93W	8.5J	248	655	650	350	D	B	72/B		
	245/35ZR19 XL		SOLMAX1	93Y	8.5J	248	655	650	350	D	A	72/B		
	245/35ZR19 XL		SA37	93Y	8.5J	248	655	650	350	D	B	72/B		
	245/35ZR19 XL		Z-107	93W	8.5J	248	655	650	350	D	B	72/B		
	255/35R19 XL		SOLMAX1 ZRT	96W	9.0J	260	661	710	350	D	B	73/B		
	255/35ZR19 XL	SOLMAX1	96Y	9.0J	260	661	710	350	D	A	73/B			
	255/35ZR19 XL	SA37	96Y	9.0J	260	661	710	350	D	B	73/B			
	265/35ZR19 XL	Z-107	98W	9.5J	271	669	750	350	D	B	73/B			
	275/35R19 XL	SOLMAX1 ZRT	100W	9.5J	278	675	800	350	D	B	73/B			
	275/35ZR19 XL	SOLMAX1	100Y	9.5J	278	675	800	350	C	A	73/B			
	275/35ZR19 XL	SA37	100W	9.5J	278	675	800	350	D	B	73/B			
	285/35ZR19 XL	SPORT RS	103W	10.0J	290	683	875	350	/	/	/			
	40er	40er	225/40R19 XL	SOLMAX1 ZRT	93W	8.0J	230	663	650	350	D	B	72/B	
			225/40ZR19 XL	SOLMAX1	93Y	8.0J	230	663	650	350	D	A	72/B	
			225/40ZR19 XL	SA37	93Y	8.0J	230	663	650	350	D	B	72/B	
			225/40R19 XL	Z-107	93W	8.0J	230	663	650	350	C	B	72/B	
			235/40ZR19 XL	SOLMAX1	96Y	8.5J	241	671	710	350	D	A	72/B	
			235/40ZR19	SA37	96Y	8.5J	241	671	710	350	D	B	71/B	
		235/40R19 XL</												

UHP / PASSENGER / SUV

Rim (inch)	Series	Size	Pattern	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	EV	ZRT	XYdB							
19"	50er	275/50R19 XL	SOLMAX1 SUV	112V	8.5J	284	759	1120	350	C	C	73/B							
		55er	205/55R19 XL	Z-107	97V	6.5J	214	709	730	350	C	B	72/B						
	20"	55er	225/55R19	EV SOLMAX1	99W	7.0J	233	731	775	300	C	A	71/B						
			235/55R19 XL	SOLMAX1 ZRT	105V	7.5J	245	741	925	350	D	B	72/B						
		60er	55er	235/55R19 XL	EV SOLMAX1	105W	7.5J	245	741	925	350	B	A	72/B					
				235/55R19 XL	Z-107	105V	7.5J	245	741	925	350	C	B	72/B					
			65er	55er	245/55R19	SOLMAX1	103V	7.5J	253	753	875	300	C	A	71/B				
					255/55R19 XL	SOLMAX1	111W	8.0J	265	763	1090	350	C	A	73/B				
				30er	55er	275/55R19	SOLMAX1 SUV	111V	8.5J	284	785	1090	300	C	C	72/B			
						235/60R19 XL	EV SOLMAX1 SUV	107V	7.0J	240	765	975	350	B	C	72/B			
					35er	55er	255/60R19 XL	SOLMAX1 SUV	113V	7.5J	260	789	1150	350	C	C	73/B		
							235/65R19 XL	SOLMAX1 SUV	109V	7.0J	240	789	1030	350	C	C	72/B		
						65er	55er	255/65R19 XL	SU318	114V	7.5J	260	815	1180	350	C	C	73/B	
								225/30ZR20 XL	SA37	85Y	8.0J	230	644	515	350	D	B	72/B	
							21"	30er	245/30R20 XL	Z-107	90W	8.5J	248	656	600	350	D	B	72/B
									255/30ZR20 XL	SOLMAX1	92Y	9.0J	260	662	630	350	D	A	73/B
35er	30er	265/30ZR20 XL	SOLMAX1	94Y	9.5J	271		668	670	350	D	A	73/B						
		275/30R20	SOLMAX1 ZRT	97W	9.5J	278		674	730	350	D	B	72/B						
	60er	30er	275/30ZR20 XL	SOLMAX1	97Y	9.5J		278	674	730	350	D	A	73/B					
			225/35ZR20 XL	SA37	90W	8.0J		230	666	600	350	D	B	72/B					
		65er	30er	235/35ZR20 XL	EV SOLMAX1	92Y		8.5J	241	672	630	350	C	A	72/B				
				245/35R20	SOLMAX1 ZRT	95W		8.5J	248	680	690	350	D	B	71/B				
			35er	30er	245/35ZR20 XL	SA37		95Y	8.5J	248	680	690	350	D	B	72/B			
					255/35ZR20 XL	SOLMAX1		97Y	9.0J	260	686	730	350	D	A	73/B			
				60er	30er	255/35ZR20 XL		SA37	97W	9.0J	260	686	730	350	C	B	73/B		
						265/35ZR20 XL		SOLMAX1	99Y	9.5J	271	694	775	350	D	A	73/B		
					22"	30er		275/35ZR20 XL	SPORT RS ^{II}	102W	9.5J	278	700	850	350	/	/	/	
								275/35R20 XL	SOLMAX1 ZRT	102W	9.5J	278	700	850	350	D	B	73/B	
35er	30er	275/35ZR20 XL	SOLMAX1	102Y		9.5J	278	700	850	350	C	A	73/B						
		275/35ZR20 XL	SA37	102W		9.5J	278	700	850	350	D	B	73/B						
	60er	30er	285/35ZR20 XL	SPORT RS ^{II} /SPORT RS		104W	10.0J	290	708	900	350	/	/	/					
			285/35R20 XL	SOLMAX1		104Y	10.0J	290	708	900	350	C	A	75/B					
		65er	30er	295/35ZR20 XL		SOLMAX1	105Y	10.5J	301	714	925	350	C	A	75/B				
				315/35R20 XL		SOLMAX1 ZRT	110W	11.0J	320	728	1060	350	D	B	75/B				
			35er	30er		315/35ZR20 XL	SOLMAX1	110Y	11.0J	320	728	1060	350	C	A	75/B			
						325/35R20	SOLMAX1 ZRT	108W	11.5J	331	736	1000	300	D	B	74/B			
				23"		40er	245/40R20 XL	Z-107	99W	8.5J	248	704	775	350	C	B	71/B		
							245/40R20 XL	SOLMAX1 ZRT	99W	8.5J	248	704	775	350	D	B	72/B		
						45er	40er	245/40ZR20 XL	SOLMAX1	99Y	8.5J	248	704	775	350	C	A	72/B	
								245/40ZR20 XL	SA37	99W	8.5J	248	704	775	350	D	B	72/B	
50er	40er	255/40ZR20 XL	SPORT RS ^{II} /SPORT RS		101W		9.0J	260	712	825	350	/	/	/					
		255/40ZR20 XL	EV SOLMAX1		101Y		9.0J	260	712	825	350	C	A	73/B					
	55er	40er	265/40ZR20 XL		SOLMAX1		104Y	9.5J	271	720	900	350	C	A	73/B				
			275/40R20 XL		SOLMAX1 ZRT		106W	9.5J	278	728	950	350	D	B	73/B				
		60er	40er		275/40ZR20 XL		SOLMAX1	106Y	9.5J	278	728	950	350	C	A	73/B			
					275/40ZR20 XL		SA57	106W	9.5J	278	728	950	350	C	B	73/B			
			65er		40er		275/40R20 XL	SU318	106V	9.5J	278	728	950	350	D	C	73/B		
							285/40R20	SOLMAX1 ZRT	104W	10.0J	290	736	900	300	D	B	74/B		
					24"		50er	285/40ZR20 XL	EV SOLMAX1	108Y	10.0J	290	736	1000	350	B	A	75/B	
								295/40ZR20 XL	SOLMAX1	110Y	10.5J	301	744	1060	350	C	A	75/B	
55er	50er	305/40R20 XL	SOLMAX1 ZRT	112W		11.0J	313	752	1120	350	D	B	75/B						
		305/40ZR20 XL	SOLMAX1	112Y		11.0J	313	752	1120	350	C	A	75/B						
	60er	50er	235/45R20 XL	SOLMAX1		100Y	8.0J	236	720	800	350	C	A	72/B					
			245/45R20 XL	SOLMAX1 ZRT		103W	8.0J	243	728	875	350	D	B	72/B					
		65er	50er	245/45ZR20 XL		EV SOLMAX1	103W	8.0J	243	728	875	350	B	A	72/B				
				245/45R20		SA37	99W	8.0J	243	728	775	300	D	B	71/B				
			70er	50er		255/45R20 XL	SOLMAX1 ZRT	105W	8.5J	255	738	925	350	D	B	73/B			
						255/45ZR20 XL	EV SOLMAX1	105Y	8.5J	255	738	925	350	B	A	73/B			
				75er		50er	255/45R20 XL	SA37	105W	8.5J	255	748	925	350	C	B	73/B		
							255/45R20 XL	SA57	105V	8.5J	255	738	925	350	C	B	73/B		
						80er	50er	265/45ZR20 XL	SOLMAX1	108Y	9.0J	266	746	1000	350	C	A	73/B	
								265/45R20 XL	SA37	108W	9.0J	266	746	1000	350	C	B	73/B	
25"	50er	275/45R20 XL	SOLMAX1 ZRT	110W	9.0J	273	756	1060	350	D	B	73/B							
		275/45ZR20 XL	SOLMAX1	110Y	9.0J	273	756	1060	350	C	A	73/B							
	55er	50er	275/45R20 XL	SA57	110V	9.0J	273	756	1060	350	C	B	73/B						
			275/45R20 XL	SL369	110H	9.0J	273	756	1060	350	D	D	73/B						
		60er	50er	285/45R20	EV SOLMAX1	108Y	9.5J	285	764	1000	300	B	A	74/B					
				235/50R20	EV SOLMAX1	104W	7.5J	245	744	900	350	C	A	71/B					
			65er	50er	245/50R20	EV SOLMAX1	102W	7.5J	253	754	850	300	B	A	71/B				
					245/50R20	SA37	102W	7.5J	253	754	850	300	C	B	71/B				

UHP / PASSENGER / SUV

Rim (inch)	Series	Size	Pattern	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	EV	ZRT	XYdB							
20"	50er	255/50R20 XL	EV SOLMAX1	109W	8.0J	265	764	1030	350	B	A	73/B							
		265/50R20 XL	SA37	111W	8.5J	277	774	1090	350	C	B	73/B							
	55er	50er	265/50R20 XL	SA57	111V	8.5J	277	774	1090	350	C	B	73/B						
			265/50R20 XL	SOLMAX1 SUV	111V	8.5J	277	774	1090	350	C	C	73/B						
		60er	50er	265/50R20 XL	SL369	111T	8.5J	277	774	1090	350	D	D	73/B					
				275/50R20 XL	SA37	113W	8.5J	284	784	1150	350	B	B	73/B					
			65er	50er	285/50R20	SA57	112V	9.0J	297	794	1120	300	C	B	74/B				
					285/50R20	SOLMAX1 SUV	112V	9.0J	297	794	1120	300	C	C	74/B				
				70er	50er	285/50R20 XL	SL369	116V	9.0J	297	794	1250	350	D	D	75/B			
						195/55R20 XL	Z-107	95H	6.0J	201	722	690	350	C	B	72/B			
					75er	50er	235/55R20 XL	SOLMAX1	105W	7.5J	245	766	925	350	C	A	72/B		
							235/55R20 XL	SA37	105W	7.5J	245	766	925	350	C	B	72/B		
						80er	50er	255/55R20 XL	SOLMAX1	110W	8.0J	265	788	1060	350	C	A	73/B	
								255/55R20 XL	SA37	110W	8.0J	265	788	1060	350	C	B	73/B	
							85er	50er	275/55R20 XL	SA57	117V	8.5J	284	810	1285	350	C	B	73/B
									275/55R20 XL	SOLMAX1 SUV	117V	8.5J	284	810	1285	350	C	C	73/B
21"	30er	275/55R20 XL	SU318	117V	8.5J	284	810	1285	350	C	C	73/B							
		275/55R20	SL369	113S	8.5J	284	810	1150	300	D	D	72/B							
	35er	30er	255/60R20	SU318	113V	7.5J	260	814	1150	350	C	C	72/B						
			275/60R20 XL	SA57	119V	8.0J	279	838	1360	350	C	B	73/B						
		40er	30er	275/60R20	SL369	115T	8.0J	279	838	1215	300	D	D	72/B					
				275/30R21 XL	SOLMAX1 ZRT	98W	9.5J	278	699	750	350	D	B	73/B					
			45er	30er	275/30ZR21 XL	SOLMAX1	98Y	9.5J	278	699	750	350	C	A	73/B				
					285/30ZR21 XL	SOLMAX1	100Y	10.0J	290	705	800	350	C	A	75/B				
				50er	30er	315/30ZR21 XL	SOLMAX1	105Y	11.0J	320	723	925	350	C	A	75/B			
						325/30R21 XL	SOLMAX1 ZRT	108W	11.5J	331	729	1000	350	D	B	75/B			
					55er	30er	245/35R21 XL	SOLMAX1 ZRT	96W	8.5J	248	705	710	350	D	B	72/B		
							245/35ZR21 XL	EV SOLMAX1	96Y	8.5J	248	705	710	350	C	A	72/B		
						60er	30er	275/35R21 XL	SOLMAX1 ZRT	103W	9.5J	278	725	875	350	D	B	73/B	
								275/35ZR21 XL	EV SOLMAX1	103Y	9.5J	278	725	875	350	B	A	73/B	
22"	30er	285/35R21 XL	SOLMAX1 ZRT	105W	10.0J	290	733	925	350	D	B	75/B							
		285/35ZR21 XL	SOLMAX1	105Y	10.0J	290	733	925	350	C	A	75/B							
	35er	30er	295/35R21 XL	SOLMAX1	107Y	10.5J	301	739	975	350	C	A	75/B						
			295/35ZR21 XL	SA37	107Y	10.5J	301	739	975	350	C	B	75/B						
		40er	30er	315/35R21 XL	SOLMAX1 ZRT	111W	11.0J	320	753	1090	350	D	B	75/B					
				245/40R21 XL	SOLMAX1 ZRT	100W	8.5J	248	729	800	350	D	B	72/B					
			45er	30er	255/40R21 XL	SOLMAX1	102Y	9.0J	260	737	850	350	C	A	73/B				
					265/40R21 XL	SOLMAX1	105Y	9.5J	271	745	925	350	C	A	73/B				
				50er	30er	265/40ZR21 XL	SA37	105W	9.5J	271	745	9							

UHP / PASSENGER / SUV

Rim (inch)	Series	Size	Pattern	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)			
22"	45er	255/45ZR22 XL	SOLMAX1	107Y	8.5J	255	789	975	350	C	A	73/B
		275/45ZR22 XL	SOLMAX1	112Y	9.0J	273	807	1120	350	C	A	73/B
		285/45ZR22 XL	SOLMAX1	114W	9.5J	285	815	1180	350	C	A	75/B
		285/45R22 XL	SA37	114V	9.5J	285	815	1180	350	D	B	75/B
		305/45R22 XL	SA57	118V	10.0J	303	833	1320	350	C	B	75/B
50er	275/50R22	SOLMAX1 SUV	111H	8.5J	284	835	1090	300	C	C	72/B	
23"	35er	285/35ZR23 XL	SOLMAX1	107Y	10.0J	290	784	975	350	C	A	75/B
	40er	285/40ZR23 XL	SOLMAX1	111Y	10.0J	290	812	1090	350	C	A	75/B
24"	30er	255/30ZR24 XL	SA37	97Y	9.0J	260	764	730	350	D	B	73/B
	35er	295/35R24 XL	SA57	110V	10.5J	301	816	1060	350	C	B	75/B

LTR / COMMERCIAL LTR

Rim (inch)	Series	Size	Pattern	LR/PR	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)				
12"	80er	155R12C	H188	C/6PR	83/81Q	4.5B	157	550	487/462	350	D	C	/	
13"	70er	165/70R13C	H188	C/6PR	88/86S	5.0J	170	562	560/530	375	D	C	/	
	80er	155R13C	SC328	D/8PR	90/88S	4.5B	157	578	600/560	450	D	C	/	
		155R13C	H188	D/8PR	90/88S	4.5B	157	578	600/560	450	D	C	/	
		165R13C	SC328	C/6PR	91/89Q	4.5B	167	596	615/580	375	D	C	/	
		165R13C	H188	C/6PR	91/89S	4.5B	167	596	615/580	375	D	C	/	
14"	70er	175/70R14C	H188	C/6PR	95/93S	5.0J	177	602	690/650	375	D	C	/	
		205/70R14C	SC328	C/6PR	102/100R	6.0J	209	644	850/800	375	D	C	/	
		215/75R14C	SC328	D/8PR	112/110Q	6.0J	216	678	1120/1060	475	D	C	/	
	80er	185R14C	SC328	D/8PR	102/100Q	5.5J	188	650	850/800	450	D	C	/	
		185R14C	H188	D/8PR	102/100R	5.5J	188	650	850/800	450	D	C	/	
		185R14C	SL366	D/8PR	102/100Q	5.5J	188	650	850/800	450	/	/	/	
		195R14C	H188	D/8PR	106/104Q	5.5J	198	666	950/900	450	D	C	/	
		195R14C	SL366	D/8PR	106/104Q	5.5J	198	666	950/900	450	/	/	/	
		205R14C	SC328	D/8PR	109/107R	6.0J	208	686	1030/975	450	D	C	/	
		215R14C	SC328	D/8PR	112/110Q	6.0J	218	700	1120/1060	450	D	C	/	
		205/65R15C	SC328	C/6PR	102/100T	6.0J	209	647	850/800	375	D	C	/	
	15"	65er	205/65R15C	H188	C/6PR	102/100T	6.0J	209	647	850/800	375	C	C	/
			215/65R15C	H188	C/6PR	104/102T	6.5J	221	661	900/850	375	C	C	/
			195/70R15C	SC328	D/8PR	104/102R	6.0J	201	655	900/850	450	D	C	/
		70er	195/70R15C	H188	D/8PR	104/102R	6.0J	201	655	900/850	450	C	C	/
205/70R15C			SC328	D/8PR	106/104R	6.0J	209	669	950/900	475	D	C	/	
205/70R15C			H188	D/8PR	106/104R	6.0J	209	669	950/900	475	C	C	/	
205/70R15C			SL366	C/6PR	104/102Q	6.0J	209	669	900/850	375	/	/	/	
215/70R15C			SC328	D/8PR	109/107R	6.5J	221	683	1030/975	475	D	C	/	
215/70R15C			H188	D/8PR	109/107R	6.5J	221	683	1030/975	475	C	C	/	
225/70R15C			SC328	D/8PR	112/110R	6.5J	228	697	1120/1060	450	D	C	/	
225/70R15C			H188	D/8PR	112/110R	6.5J	228	697	1120/1060	450	C	C	/	
LT215/75R15			SL366	C/6PR	100/97Q	6.0J	216	703	800/730	350	/	/	/	
LT215/75R15			SL378	C/6PR	100/97Q	6.0J	216	703	800/730	350	/	/	/	
LT225/75R15			SL366	C/6PR	102/99Q	6.0J	223	719	850/775	350	/	/	/	
LT235/75R15			SL399	C/6PR	104/101R	6.5J	235	733	900/825	350	/	/	/	
LT235/75R15	SL399	C/6PR	104/101Q	6.5J	235	733	900/825	350	/	/	/			
LT235/75R15	SL366	C/6PR	104/101Q	6.5J	235	739	900/825	350	/	/	/			
LT235/75R15	SL366	D/8PR	110/107Q	6.5J	235	739	1060/975	450	/	/	/			
LT235/75R15	SL378	C/6PR	104/101Q	6.5J	235	739	900/825	350	/	/	/			
LT235/75R15	SL378	D/8PR	110/107Q	6.5J	235	739	1060/975	450	/	/	/			
80er	185R15C	SC328	D/8PR	103/102R	5.5J	188	674	875/850	450	D	C	/		
	195R15C	SC328	D/8PR	106/104R	5.5J	198	690	950/900	450	D	C	/		
	195R15C	H188	D/8PR	106/104R	5.5J	198	690	950/900	450	C	C	/		
	215R15C	SC328	D/8PR	112/110Q	6.0J	218	724	1120/1060	450	D	C	/		
	30x9.50R15LT	SL366	C/6PR	104Q	7.5J	240	756	900	350	/	/	/		
	31x10.50R15LT	SL399	C/6PR	109S	8.5J	268	775	1030	350	/	/	/		
	31x10.50R15LT	SL366	C/6PR	109Q	8.5J	268	781	1030	350	/	/	/		
	32x11.50R15LT	SL366	C/6PR	113Q	9.0J	290	807	1150	350	/	/	/		
	33x12.50R15LT	SL366	C/6PR	108Q	10.0J	318	832	1000	250	/	/	/		
	35x12.50R15LT	SL366	C/6PR	113Q	10.0J	318	883	1150	250	/	/	/		
	31x10.50R15LT	SL378	C/6PR	109Q	8.5J	268	781	1030	350	/	/	/		
	33x12.50R15LT	SL378	C/6PR	108Q	10.0J	318	832	1000	250	/	/	/		
	16"	60er	195/60R16C	H188	C/6PR	99/97H	6.0J	201	640	775/730	375	C	C	/
			215/60R16C	SC328	D/8PR	108/106T	6.5J	221	664	1000/950	475	D	B	/
			215/60R16C	H188	D/8PR	108/106T	6.5J	221	664	1000/950	475	C	C	/
65er		195/65R16C	SC328	D/8PR	104/102T	6.0J	201	660	900/850	475	D	B	/	
		195/65R16C	H188	D/8PR	104/102T	6.0J	201	660	900/850	475	C	C	/	
		205/65R16C	SC328	D/8PR	107/105T	6.0J	209	672	975/925	475	D	B	/	
		205/65R16C	H188	D/8PR	107/105T	6.0J	209	672	975/925	475	C	C	/	
		215/65R16C	SC328	D/8PR	109/107R	6.5J	221	686	1030/975	475	D	B	/	
		215/65R16C	H188	D/8PR	109/107T	6.5J	221	686	1030/975	475	C	C	/	
		225/65R16C	SC328	D/8PR	112/110R	6.5J	228	698	1120/1060	475	C	B	/	
		225/65R16C	H188	D/8PR	112/110T	6.5J	228	698	1120/1060	475	C	C	/	
		235/65R16C	SC328	D/8PR	115/113R	7.0J	240	712	1215/1150	475	C	B	/	
		235/65R16C	SC328	F/12PR	121/119R	7.0J	240	712	1450/1360	575	C	B	/	
		235/65R16C	H188	D/8PR	115/113R	7.0J	240	712	1215/1150	475	C	C	/	
		70er	215/70R16C	SC328	C/6PR	108/106T	6.5J	221	708	1000/950	375	D	C	/
LT245/70R16	SL399		E/10PR	118/115Q	7.0J	248	750	1320/1215	550	/	/	/		
LT245/70R16	SL378		E/10PR	118/115Q	7.0J	248	750	1320/1215	550	/	/	/		
LT265/70R16	SL378		E/10PR	121/118Q	8.0J	272	784	1450/1320	550	/	/	/		
75er	175/75R16C	SC328	D/8PR	101/99Q	5.0J	177	668	825/775	475	D	B	/		
	185/75R16C	H188	D/8PR	104/102R	5.0J	184	684	900/850	475	C	C	/		

LTR / COMMERCIAL LTR

Rim (inch)	Series	Size	Pattern	LR/PR	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)				
16"	75er	195/75R16C	SC328	D/8PR	107/105R	5.5J	196	698	975/925	475	D	B	/	
		195/75R16C	H188	D/8PR	107/105R	5.5J	196	698	975/925	475	C	C	/	
		205/75R16C	SC328	D/8PR	110/108Q	5.5J	203	714	1060/1000	475	C	B	/	
		205/75R16C	H188	D/8PR	110/108Q	5.5J	203	714	1060/1000	475	C	C	/	
		215/75R16C	SC328	D/8PR	113/111Q	6.0J	216	728	1150/1090	475	C	B	/	
		215/75R16C	H188	D/8PR	113/111Q	6.0J	216	728	1150/1090	475	C	C	/	
		225/75R16C	H188	E/10PR	118/116R	6.0J	223	744	1320/1250	525	C	C	/	
		LT225/75R16	SL366	E/10PR	115/112Q	6.0J	223	750	1215/1120	550	/	/	/	
		LT245/75R16	SL399	E/10PR	120/116Q	7.0J	248	774	1380/1260	550	/	/	/	
		LT245/75R16	SL366	E/10PR	120/116Q	7.0J	248	780	1380/1260	550	/	/	/	
		LT245/75R16	SL378	E/10PR	120/116Q	7.0J	248	780	1380/1260	550	/	/	/	
		80er	175R16C	SC328	C/6PR	98/96Q	5.0J	178	684	750/710	375	D	B	/
			205R16C	SL366	D/8PR	110/108Q	6.0J	208	736	1060/1000	450	/	/	/
		85er	LT235/85R16	SL366	E/10PR	120/116Q	6.5J	235	812	1380/1260	550	/	/	/
			LT235/85R16	SL378	E/10PR	120/116Q	6.5J	235	812	1380/1260	550	/	/	/
17"	65er	LT265/65R17	SL399	E/10PR	120/117Q	8.0J	272	776	1400/1285	550	/	/	/	
		LT265/65R17	SL366	E/10PR	120/117Q	8.0J	272	775	1400/1285	550	/	/	/	
		LT265/65R17	SL378	E/10PR	120/117Q	8.0J	272	775	1400/1285	550	/	/	/	
		LT285/65R17	SL399	E/10PR	121/118Q	8.5J	292	802	1450/1320	550	/	/	/	
		LT245/70R17	SL399	E/10PR	119/116Q	7.0J	248	776	1360/1250	550	/	/	/	
	70er	LT245/70R17	SL366	E/10PR	119/116Q	7.0J	248	782	1360/1250	550	/	/	/	
		LT245/70R17	SL378	E/10PR	119/116Q	7.0J	248	776	1360/1250	550	/	/	/	
		LT265/70R17	SL366	E/10PR	121/118Q	8.0J	272	810	1450/1320	550	/	/	/	
		LT265/70R17	SL378	E/10PR	121/118Q	8.0J	272	810	1450/1320	550	/	/	/	
		LT285/70R17	SL366	E/10PR	121/118Q	8.5J	292	832	1450/1320	550	/	/	/	
		LT285/70R17	SL378	E/10PR	121/118Q	8.5J	292	832	1450/1320	550	/	/	/	
		LT315/70R17	SL366	E/10PR	121/118Q	9.5J	323	880	1450/1320	450	/	/	/	
		80er	35x12.50R17LT	SL366	E/10PR	121Q	10.0J	318	883	1450	450	/	/	/
	18"	60er	LT265/60R18	SL378	E/10PR	119/116Q	8.0J	272	775	1360/1250	550	/	/	/
	20"	50er	LT285/50R20	SL399	E/10PR	119/116Q	9.0J	297	794	1360/1250	550	/	/	/
80er		33x12.50R20LT	SL366	E/10PR	114Q	10.0J	318	832	1180	450	/	/	/	
		35x12.50R20LT	SL366	E/10PR	121Q	10.0J	318	883	1450	450	/	/	/	

ALL SEASON

Rim (inch)	Series	Size	Pattern	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)				
13"	65er	155/65R13	Z-401	73T	4.5B	157	532	365	300	D	C	71/B	
		175/65R13	Z-401	80T	5.0B	177	558	450	300	D	C	71/B	
	70er	155/70R13	Z-401	75T	4.5B	157	548	387	300	D	C	71/B	
		165/70R13	Z-401	79T	5.0B	170	562	437	300	D	C	71/B	
	80er	155/80R13	Z-401	79T	4.5B	157	578	437	300	D	C	71/B	
	14"	55er	185/55R14	Z-401	80H	6.0J	194	560	450	300	D	C	71/B
165/60R14 XL			Z-401	79H	5.0J	170	554	437	350	D	C	71/B	
65er		185/60R14	Z-401	82H	5.5J	189	578	530	300	D	C	71/B	
		155/65R14	Z-401	75T	4.5J	157	558	387	300	D	C	71/B	
		165/65R14	Z-401	79T	5.0J	170	570	437	300	D	C	71/B	
70er		175/65R14	Z-401	82T	5.0J	177	584	475	300	D	C	71/B	
		185/65R14	Z-401	86H	5.5J	189	596	530	300	D	C	71/B	
		165/70R14	Z-401	81T	5.0J	170	588	462	300	D	C	71/B	
		175/70R14 XL	Z-401	88T	5.0J	177	602	560	350	C	C	71/B	
15"		50er	185/70R14	Z-401	88T	5.5J	189	616	560	300	D	C	71/B
			195/50R15	Z-401	82V	6.0J	201	577	475	300	D	C	72/B
			185/55R15	Z-401	82H	6.0J	194	585	475	300	D	C	71/B
	55er	195/55R15 XL	Z-401	89V	6.0J	201	595	580	350	D	C	72/B	
		155/60R15	Z-401	74T	4.5J	157	567	375	300	D	C	71/B	
	60er	185/60R15 XL	Z-401	88H	5.5J	189	603	560	350	C	C	71/B	
		195/60R15	Z-401	88V	6.0J	201	615	560	300	D	C	72/B	
		165/65R15	Z-401	81T	5.0J	170	595	462	300	D	C	71/B	
	65er	175/65R15	Z-401	84H	5.0J	177	609	500	300	D	C	71/B	
		185/65R15 XL	Z-401	92H	5.5J	189	621	630	350	C	C	71/B	
		195/65R15	Z-401	91V	6.0J	201	635	615	300	C	C	72/B	
		195/65R15 XL	Z-401	95H	6.0J	201	635	690	350	C	C	72/B	
		205/65R15	Z-401	94H	6.0J	209	647	670	300	C	C	72/B	
		215/65R15	Z-401	96H	6.5J	221	661	710	300	D	C	72/B	
	70er	195/70R15C	SW613	104/102R	6.0J	201	655	900/850	450	D	C	72/B	
205/70R15C		SW613	106/104R	6.0J	209	669	950/900	450	D	C	72/B		
215/70R15C		SW613	109/107R	6.5J	221	683	1030/975	450	D	C	72/B		
225/70R15C		SW613	112/110R	6.5J	228	697	1120/1060	450	D	C	71/B		
195/45R16 XL		Z-401	84V	6.5J	195	582	500	350	D	C	72/B		
16"	45er	205/45R16 XL	Z-401	87W	7.0J	206	590	545	350	D	C	71/B	
		215/45R16 XL	Z-401	90V	7.0J	213	600	600	350	D	C	72/B	
		185/50R16	Z-401	81H	6.0J	194	592	462	300	D	C	72/B	
	50er	195/50R16 XL	Z-401	88V	6.0J	201	602	560	350	D	C	72/B	
		185/55R16 XL	Z-401	87H	6.0J	194	610	545	350	C	C	72/B	
		195/55R16 XL	Z-401	91V	6.0J	201	620	615	350	C	C	72/B	
	55er	205/55R16	Z-401	91V	6.5J	214	632	615	300	C	C	72/B	
		205/55R16 XL	Z-401	94V	6.5J	214	632	670	350	C	C	72/B	
		215/55R16 XL	Z-401	97V	7.0J	226	642	730	350	C	C	72/B	
		225/55R16 XL	Z-401	99V	7.0J	233	654	775	350	C	C	72/B	
		195/60R16	Z-401	89V	6.0J	201	640	580	300	D	C	72/B	
		195/60R16C	SW613	99/97T	6.0J	201	640	775/730	375	E	C	72/B	
	60er	205/60R16 XL	Z-401	96V	6.0J	209	652	710	350	C	C	72/B	
		215/60R16 XL	Z-401	99V	6.5J	221	664	775	350	C	C	72/B	
		235/60R16	Z-401	100V	7.0J	240	688	800	300	C	C	72/B	
195/65R16C		SW613	104/102T	6.0J	201	660	900/850	475	D	C	72/B		
205/65R16C		SW613	107/105T	6.0J	209	672	975/925	475	D	C	72/B		
215/65R16		Z-401	98V	6.5J	221	686	750	300	C	C	72/B		
215/65R16C		SW613	109/107R	6.5J	221	686	1030/975	475	D	C	72/B		
225/65R16C		SW613	112/110R	6.5J	228	698	1120/1060	475	D	C	72/B		
65er	235/65R16C	SW613	115/113R	7.0J	240	712	1215/1150	475	D	C	72/B		
	215/70R16	Z-401	100H	6.5J	221	708	800	300	C	C	72/B		
	185/75R16C	SW613	104/102Q	5.0J	184	684	900/850	475	E	C	72/B		
	195/75R16C	SW613	107/105R	5.5J	196	698	975/925	475	D	C	72/B		
	205/75R16C	SW613	110/108Q	5.5J	203	714	1060/1000	475	D	C	72/B		
17"	40er	215/75R16C	SW613	113/111Q	6.0J	216	728	1150/1090	475	D	C	72/B	
		205/40R17 XL	Z-401	84W	7.5J	212	596	500	350	D	C	72/B	
		215/40R17 XL	Z-401	87W	7.5J	218	604	545	350	D	C	72/B	
	45er	205/45R17 XL	Z-401	88V	7.0J	206	616	560	350	D	C	72/B	
		215/45R17 XL	Z-401	91W	7.0J	213	626	615	350	C	C	72/B	
		225/45R17 XL	Z-401	94W	7.5J	225	634	670	350	C	C	72/B	
		235/45R17 XL	Z-401	97W	8.0J	236	644	730	350	C	C	72/B	
		245/45R17 XL	Z-401	99W	8.0J	243	652	775	350	C	C	72/B	
	50er	205/50R17 XL	Z-401	93V	6.5J	214							

ALL SEASON

Rim (inch)	Series	Size	Pattern	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)				
17"	55er	215/55R17 XL	Z-401	98V	7.0J	226	668	750	350	C	C	72/B	
		225/55R17 XL	Z-401	101W	7.0J	233	680	825	350	C	C	72/B	
		235/55R17 XL	Z-401	103W	7.5J	245	690	875	350	C	C	72/B	
	60er	215/60R17	Z-401	96H	6.5J	221	690	710	300	C	C	72/B	
		225/60R17	Z-401	99V	6.5J	228	702	775	300	C	C	72/B	
		235/60R17	Z-401	102V	7.0J	240	714	850	300	C	C	72/B	
	65er	215/65R17	Z-401	99V	6.5J	221	712	775	300	C	C	72/B	
		225/65R17 XL	Z-401	106H	6.5J	228	724	950	350	C	C	72/B	
		235/65R17 XL	Z-401	108V	7.0J	240	738	1000	350	C	C	72/B	
	18"	40er	225/40R18 XL	Z-401	92W	8.0J	230	637	630	350	D	C	72/B
			235/40R18 XL	Z-401	95W	8.5J	241	645	690	350	C	C	73/B
			245/40R18 XL	Z-401	97W	8.5J	248	653	730	350	C	C	72/B
45er		215/45R18 XL	Z-401	93W	7.0J	213	651	650	350	C	C	72/B	
		225/45R18 XL	Z-401	95W	7.5J	225	659	690	350	C	C	72/B	
		235/45R18 XL	Z-401	98W	8.0J	236	669	750	350	C	C	72/B	
		245/45R18 XL	Z-401	100W	8.0J	243	677	800	350	C	C	72/B	
50er		225/50R18	Z-401	95W	7.0J	233	683	690	300	C	C	72/B	
		235/50R18 XL	Z-401	101W	7.5J	245	693	825	350	C	C	72/B	
55er		215/55R18 XL	Z-401	99V	7.0J	226	693	775	350	D	C	73/B	
		225/55R18	Z-401	98V	7.0J	233	705	750	300	C	C	72/B	
		235/55R18	Z-401	100V	7.5J	245	715	800	300	C	C	72/B	
60er	235/60R18 XL	Z-401	107V	7.0J	240	739	975	350	C	C	73/B		
19"	35er	225/35R19 XL	Z-401	88W	8.0J	230	641	560	350	D	C	73/B	
		235/35R19 XL	Z-401	91W	8.5J	241	647	615	350	D	C	73/B	
		255/35R19 XL	Z-401	96W	9.0J	260	661	710	350	C	C	72/B	
	40er	225/40R19 XL	Z-401	93W	8.0J	230	663	650	350	D	C	72/B	
		235/40R19 XL	Z-401	96W	8.5J	241	671	710	350	C	C	72/B	
		245/40R19 XL	Z-401	98W	8.5J	248	679	750	350	C	C	72/B	
	45er	225/45R19 XL	Z-401	96W	7.5J	225	685	710	350	C	C	72/B	
		235/45R19 XL	Z-401	99W	8.0J	236	695	775	350	C	C	72/B	
		245/45R19 XL	Z-401	102W	8.0J	243	703	850	350	C	C	72/B	
	50er	235/50R19	Z-401	99V	7.5J	245	719	775	300	C	C	72/B	
		255/50R19 XL	Z-401	107W	8.0J	265	739	975	350	B	C	72/B	
	55er	225/55R19	Z-401	99V	7.0J	233	731	775	300	C	C	72/B	
235/55R19 XL		Z-401	105W	7.5J	245	741	925	350	C	C	72/B		
255/55R19 XL		Z-401	111W	8.0J	265	763	1090	350	B	C	72/B		
20"	45er	255/45R20 XL	Z-401	105W	8.5J	255	738	925	350	B	C	72/B	
		265/45R20 XL	Z-401	108W	9.0J	266	746	1000	350	B	C	72/B	

WINTER

Rim (inch)	Series	Size	Pattern	LR/PR	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)				
12"	80er	155R12C	SW612	D/8PR	88/86Q	4.5B	157	550	560/530	450	E	C	72/B	
13"	65er	155/65R13	SW618		73T	4.5J	157	532	365	300	E	E	71/B	
		165/65R13	SW618		77T	5.0J	170	544	412	300	E	E	71/B	
70er	155/70R13	155/70R13	SW608		75T	4.5B	157	548	387	300	D	C	71/B	
		165/70R13	SW608		79T	5.0B	170	562	437	300	D	C	71/B	
		165/70R13	SW618		79T	5.0J	170	562	437	300	E	E	71/B	
	175/70R13	175/70R13	SW608		82T	5.0B	177	576	475	350	D	C	71/B	
		175/70R13	SW618		82T	5.0J	177	576	475	300	E	E	71/B	
		175/70R13	SW608		82T	5.0B	177	576	475	300	E	E	71/B	
80er	155/80R13	SW608		79T	4.5B	157	578	437	300	E	C	71/B		
	155R13C	SW612	C/6PR	85/83Q	4.5J	157	578	515/487	350	D	C	72/B		
	165R13C	SW612	C/6PR	91/89Q	4.5B	165	594	615/580	450	E	C	72/B		
175R13C	175R13C	SW612	D/8PR	97/95Q	5.0B	177	610	730/690	450	D	C	72/B		
	14"	60er	165/60R14	SW618		75T	5.0J	170	554	387	300	E	E	71/B
			185/60R14	SW608		82H	5.5J	189	578	475	300	D	C	71/B
185/60R14			SW618		82T	5.5J	189	578	475	300	E	E	71/B	
185/60R14		185/60R14	Z-506		82T	5.5J	189	578	475	320	/	/	/	
		195/60R14	SW608		86H	6.0J	201	590	530	300	C	C	72/B	
		195/60R14	SW628		86T	6.0J	201	590	530	300	D	C	72/B	
65er	155/65R14	155/65R14	SW608		75T	4.5B	157	558	387	300	D	C	71/B	
		155/65R14	SW618		75T	4.5B	157	558	387	300	E	E	71/B	
		175/65R14	SW608		82H	5.0J	177	584	475	300	D	C	71/B	
	175/65R14	175/65R14	SW618		82T	5.0J	177	584	475	300	E	E	71/B	
		175/65R14 XL	Z-506		86T	5.0J	177	584	530	350	/	/	/	
		185/65R14	Z-506		86T	5.5J	189	596	530	320	/	/	/	
185/65R14	185/65R14	SW608		86H	5.5J	189	596	530	350	C	C	71/B		
	185/65R14	SW618		86T	5.5J	189	596	530	300	E	E	71/B		
	185/65R14	SW618		86T	5.5J	189	596	530	300	E	E	71/B		
	165/70R14	SW608		81T	5.0J	170	588	462	300	D	C	71/B		
	165/70R14	SW618		81T	5.0J	170	588	462	300	D	E	71/B		
	175/70R14	SW608		84T	5.0J	177	602	500	300	D	C	71/B		
175/70R14	175/70R14	SW618		84T	5.0J	177	602	500	300	E	E	71/B		
	175/70R14C	SW612	C/6PR	95/93Q	5.0J	177	602	690/650	375	E	C	72/B		
	185/70R14	SW608		88T	5.5J	189	616	560	300	D	C	71/B		
	185/70R14	SW618		88T	5.5J	189	616	560	300	E	E	71/B		
	195/70R14	SW608		91T	6.0J	201	630	615	300	C	C	72/B		
	195/70R14	SW618		91T	6.0J	201	630	615	300	D	E	72/B		
195/70R14 XL	195/70R14 XL	Z-506		91T	6.0J	201	630	615	320	/	/	/		
	185R14C	SW608	D/8PR	102/100Q	5.5J	188	650	850/800	450	D	C	73/B		
	185R14C	SW612	D/8PR	102/100R	5.5J	188	650	850/800	450	D	C	72/B		
15"	50er	195/50R15	SW628		82T	6.0J	201	577	475	300	E	C	72/B	
		195/50R15	SW618		82T	6.0J	201	577	475	300	E	E	72/B	
55er	185/55R15 XL	185/55R15	SW608		86H/V	6.0J	194	585	530	350	D	C	71/B	
		185/55R15	SW618		82T	6.0J	194	585	475	300	E	E	71/B	
	195/55R15 XL	SW608		89H	6.0J	201	595	580	350	C	C	72/B		
	195/55R15	SW618		85H	6.0J	201	595	515	300	E	E	72/B		
60er	185/60R15 XL	185/60R15	SW608		88H	5.5J	189	603	560	350	D	C	71/B	
		185/60R15	SW618		84T	5.5J	189	603	500	300	E	E	71/B	
		195/60R15	SW608		88H	6.0J	201	615	560	300	D	C	72/B	
	195/60R15	195/60R15	SW618		88T	6.0J	201	615	560	300	D	E	72/B	
		195/60R15	Z-506		88T	6.0J	201	615	560	320	/	/	/	
		175/65R15	SW608		84T	5.0J	177	609	500	300	D	C	71/B	
65er	175/65R15	175/65R15	SW628		84T	5.0J	177	609	500	300	E	C	71/B	
		185/65R15	SW608		88H	5.5J	189	621	560	300	C	C	71/B	
		185/65R15	SW618		88T	5.5J	189	621	560	300	D	E	71/B	
	185/65R15 XL	185/65R15 XL	Z-506		92T	5.5J	189	621	630	350	/	/	/	
		195/65R15	SW608		91H	6.0J	201	635	615	300	D	C	72/B	
		195/65R15	SW618		91T	6.0J	201	635	615	300	D	E	72/B	
	195/65R15 XL	195/65R15 XL	Z-506		95T	6.0J	201	635	690	350	/	/	/	
		205/65R15	SW608		94H	6.0J	209	647	670	300	C	C	72/B	
		205/65R15	SW618		94T	6.0J	209	647	670	300	D	E	72/B	
	205/65R15	205/65R15	SW612	C/6PR										

WINTER

Rim (inch)	Series	Size	Pattern	LR/PR	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kPa)	+	+	+	
15"	70er	225/70R15C	SW606	D/8PR	112/110R	6.5J	228	697	1120/1060	450	/	/	/	
		75er	215/75R15	SW628		100T	6.0J	216	703	800	300	D	C	72/B
			225/75R15	SW628		102T	6.0J	223	719	850	300	D	C	72/B
			235/75R15	SW628		105T	6.5J	235	733	925	300	C	C	72/B
	80er	195R15C	SW612	D/8PR	106/104R	5.5J	196	693	950/900	450	D	C	72/B	
16"	45er	195/45R16 XL	Z-507		84V	6.5J	195	582	500	350	D	C	72/B	
		205/45R16 XL	Z-507		87V	7.0J	206	590	545	350	C	C	72/B	
		215/45R16	Z-507		90V	7.0J	213	600	600	350	C	C	72/B	
	50er	195/50R16 XL	SW608		88H	6.0J	201	602	560	350	C	C	72/B	
		205/50R16 XL	Z-507		91V	6.5J	214	612	615	350	C	C	72/B	
		205/50R16	Z-506		87T	6.5J	214	612	545	320	/	/	/	
		225/50R16 XL	SW608		96V	7.0J	233	632	710	350	C	C	72/B	
		55er	185/55R16	Z-507		83H	6.0J	194	610	487	300	C	C	72/B
	195/55R16		SW608		87H	6.0J	201	620	545	300	C	C	72/B	
	195/55R16 XL		SW618		91V	6.0J	201	620	615	350	D	E	72/B	
	195/55R16		Z-506		87T	6.0J	201	620	545	320	/	/	/	
	205/55R16		Z-507		91V	6.5J	214	632	615	300	C	C	72/B	
	205/55R16		SW608		91H	6.5J	214	632	615	300	C	C	72/B	
	205/55R16		SW628		91T	6.5J	214	632	615	300	E	C	72/B	
	205/55R16		SW618		91H	6.5J	214	632	615	300	D	E	72/B	
	205/55R16 XL		Z-506		94T	6.5J	214	632	670	350	/	/	/	
	215/55R16 XL		Z-507		97H	7.0J	226	642	730	350	C	C	72/B	
	215/55R16 XL		SW608		97H	7.0J	226	642	730	350	C	C	72/B	
	215/55R16		SW628		93T	7.0J	226	642	650	300	D	C	72/B	
	215/55R16		SW618		93T	7.0J	226	642	650	300	D	E	72/B	
	215/55R16 XL		Z-506		97T	7.0J	226	642	730	350	/	/	/	
	225/55R16 XL		Z-507		99V	7.0J	233	654	775	350	C	C	72/B	
	225/55R16 XL		SW608		99H	7.0J	233	654	775	350	C	C	72/B	
	225/55R16	SW618		95T	7.0J	233	654	690	300	D	E	72/B		
	225/55R16	Z-506		95T	7.0J	233	654	690	320	/	/	/		
	60er	195/60R16	SW618		89T	6.0J	201	640	580	300	D	E	72/B	
		195/60R16C	SW612	C/6PR	99/97T	6.0J	201	640	775/730	375	E	C	72/B	
		205/60R16	Z-507		92H	6.0J	209	652	630	300	C	C	72/B	
		205/60R16	SW608		92H	6.0J	209	652	630	300	C	C	72/B	
205/60R16		SW628		92T	6.0J	209	652	630	300	D	C	72/B		
205/60R16		SW618		92T	6.0J	209	652	630	300	D	E	72/B		
205/60R16 XL		Z-506		96T	6.0J	209	652	710	350	/	/	/		
215/60R16 XL		Z-507		99H	6.5J	221	664	775	350	C	C	72/B		
215/60R16 XL		SW608		99H	6.5J	221	664	775	350	C	C	72/B		
215/60R16		SW628		95T	6.5J	221	664	690	300	E	C	72/B		
215/60R16		SW618		95T	6.5J	221	664	690	300	D	E	72/B		
215/60R16		Z-506		95T	6.5J	221	664	690	320	/	/	/		
225/60R16		Z-507		98H	6.5J	228	676	750	300	C	C	72/B		
225/60R16		SW608		98H	6.5J	228	676	750	300	C	C	72/B		
225/60R16		SW618		98T	6.5J	228	676	750	300	D	E	72/B		
235/60R16		Z-507		100H	7.0J	240	688	800	300	C	C	72/B		
235/60R16		SW628		100H	7.0J	240	688	800	300	C	C	72/B		
65er	195/65R16C	SW612	D/8PR	104/102T	6.0J	201	660	900/850	475	D	C	72/B		
	205/65R16	SW618		95T	6.0J	209	672	690	300	D	E	72/B		
	205/65R16C	SW612	D/8PR	107/105T	6.0J	209	672	975/925	475	D	C	72/B		
	205/65R16	Z-506		95T	6.0J	209	672	690	320	/	/	/		
	215/65R16	Z-507		98H	6.5J	221	686	750	300	C	C	72/B		
	215/65R16	SW608		98H	6.5J	221	686	750	300	C	C	72/B		
	215/65R16	SW618		98T	6.5J	221	686	750	300	D	E	72/B		
	215/65R16C	SW612	D/8PR	109/107R	6.5J	221	686	1030/975	475	D	C	72/B		
	215/65R16	Z-506		98T	6.5J	221	686	750	320	/	/	/		
	225/65R16	SW618		100T	6.5J	228	698	800	300	D	E	72/B		
	225/65R16C	SW612	D/8PR	112/110R	6.5J	228	698	1120/1060	475	D	C	72/B		
	235/65R16C	SW612	D/8PR	115/113R	7.0J	240	712	1215/1150	475	D	C	72/B		
	70er	215/70R16	Z-507		100H	6.5J	221	708	800	300	C	C	72/B	
		215/70R16	SW628		100T	6.5J	221	708	800	300	D	C	72/B	
215/70R16		Z-506		100T	6.5J	221	708	800	320	/	/	/		
225/70R16		SW628		103T	6.5J	228	722	875	300	D	C	72/B		
235/70R16		Z-507		106H	7.0J	240	736	950	300	C	C	72/B		
235/70R16		SW628		106T	7.0J	240	736	950	300	C	C	72/B		
235/70R16		Z-506		106T	7.0J	240	736	950	320	/	/	/		
245/70R16		Z-507		107H	7.0J	248	750	975	300	C	C	72/B		
245/70R16		SW628		107T	7.0J	248	750	975	300	C	C	72/B		
265/70R16		Z-507		112H	8.0J	272	778	1120	300	B	C	72/B		
265/70R16		SW628		112T	8.0J	272	778	1120	300	C	C	72/B		

WINTER

Rim (inch)	Series	Size	Pattern	LR/PR	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kPa)	+	+	+	
16"	75er	185/75R16C	SW612	D/8PR	104/102Q	5.0J	184	684	900/850	475	E	C	72/B	
		185/75R16C	SW606	D/8PR	104/102R	5.0J	184	684	900/850	475	/	/	/	
		195/75R16C	SW612	D/8PR	107/105R	5.5J	196	698	975/925	475	D	C	72/B	
		205/75R16C	SW612	D/8PR	110/108Q	5.5J	203	714	1060/1000	475	D	C	72/B	
		215/75R16C	SW612	D/8PR	113/111Q	6.0J	216	728	1150/1090	475	D	C	72/B	
		225/75R16C	SW612	E/10PR	118/116Q	6.0J	223	744	1320/1250	525	D	C	72/B	
		LT225/75R16	SW606	E/10PR	115/112Q	6.0J	220	739	1215/1120	550	/	/	/	
		LT245/75R16	SW606	E/10PR	120/116Q	7.0J	245	771	1380/1260	550	/	/	/	
		LT265/75R16	SW606	E/10PR	123/120Q	7.5J	264	802	1550/1400	550	/	/	/	
		80er	6.50R16	SW612	E/10PR	108/107N	5.5F	185	750	1000/975	560	D	C	72/B
			7.00R16	SW612	F/12PR	117/116N	5.5F	200	775	1258/1250	670	D	C	72/B
85er	LT235/85R16	SW606	E/10PR	120/116Q	6.5J	224	801	1380/1260	550	/	/	/		
17"	40er	205/40R17 XL	SW608		84V	6.5J	212	596	500	350	D	C	72/B	
		215/40R17 XL	SW608		87V	7.5J	218	604	545	350	D	C	72/B	
		245/40R17 XL	SW608		95V	8.5J	248	628	690	350	C	C	72/B	
	45er	205/45R17 XL	SW608		88V	7.0J	206	616	560	350	D	C	72/B	
		215/45R17 XL	Z-507		91V	7.0J	213	626	615	350	C	C	72/B	
		215/45R17 XL	SW608		91V	7.0J	213	626	615	350	D	C	72/B	
		215/45R17 XL	SW618		91V	7.0J	213	626	615	350	D	E	72/B	
		215/45R17 XL	Z-506		91T	7.0J	213	626	615	350	/	/	/	
		225/45R17 XL	Z-507		94V	7.5J	225	634	670	350	C	C	72/B	
		225/45R17 XL	SW608		94V	7.5J	225	634	670	350	C	C	72/B	
		225/45R17	SW628		91H	7.5J	225	634	615	300	D	C	72/B	
		225/45R17 XL	Z-506		94H	7.5J	225	634	670	350	/	/	/	
		235/45R17 XL	Z-507		97V	8.0J	236	644	730	350	C	C	72/B	
		235/45R17 XL	SW608		97H	8.0J	236	644	730	350	C	C	72/B	
		235/45R17 XL	SW618		97T	8.0J	236	644	730	350	D	E	72/B	
		235/45R17 XL	Z-506		97T	8.0J	236	644	730	350	/	/	/	
		245/45R17 XL	Z-507		99V	8.0J	243	652	775	350	C	C	72/B	
		245/45R17 XL	SW608		99V	8.0J	243	652	775	350	D	C	72/B	
		24												

WINTER

Rim (inch)	Series	Size	Pattern	LR/PR	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)					
17"	60er	225/60R17 XL	Z-506		103T	6.5J	228	702	875	350	/	/	/		
		235/60R17	Z-507		102V	7.0J	240	714	850	300	C	C	72/B		
		255/60R17 XL	SW628		110T	7.5J	260	738	1060	350	C	C	73/B		
	65er	215/65R17	SW628			99T	6.5J	221	712	775	300	C	C	72/B	
		215/65R17 XL	Z-506			103T	6.5J	221	712	875	350	/	/	/	
		225/65R17	Z-507			102H	6.5J	228	724	850	300	C	C	72/B	
		225/65R17	SW628			102T	6.5J	228	724	850	300	D	C	72/B	
		225/65R17	SW618			102T	6.5J	228	724	850	300	D	E	72/B	
		225/65R17	Z-506			102T	6.5J	228	724	850	320	/	/	/	
		235/65R17 XL	SW608			108H	7.0J	240	738	1000	350	C	C	72/B	
		235/65R17	SW618			104T	7.0J	240	738	900	300	D	E	72/B	
		235/65R17	Z-506			104T	7.0J	240	738	900	320	/	/	/	
		245/65R17	Z-507			107H	7.0J	248	750	975	300	C	C	72/B	
		245/65R17	SW628			107T	7.0J	248	750	975	300	D	C	72/B	
		245/65R17 XL	Z-506			111T	7.0J	248	750	1090	350	/	/	/	
		265/65R17	Z-507			112H	8.0J	272	776	1120	300	B	C	73/B	
		265/65R17	SW628			112T	8.0J	272	776	1120	300	B	C	73/B	
		285/65R17	SW628			116T	8.5J	292	802	1250	300	C	C	75/B	
		70er	245/70R17	SW628			110T	7.0J	248	776	1060	300	B	C	72/B
			LT245/70R17	SW606	E/10PR		119/116Q	7.0J	245	771	1360/1250	550	/	/	/
			265/70R17	SW628			115T	8.0J	272	804	1215	300	B	C	73/B
			265/70R17	Z-506			115T	8.0J	272	804	1250	320	/	/	/
	LT265/70R17		SW606	E/10PR		121/118Q	8.0J	269	799	1450/1320	550	/	/	/	
	LT285/70R17		SW606	E/10PR		121/118Q	8.5J	288	826	1450/1320	550	/	/	/	
	LT245/75R17		SW606	E/10PR		121/118Q	7.0J	245	795	1450/1320	550	/	/	/	
	80er	LT235/80R17	SW606	E/10PR		120/117Q	6.5J	232	802	1400/1285	550	/	/	/	
	18"	40er	225/40R18 XL	Z-507		92V	8.0J	230	637	630	350	C	C	72/B	
			225/40R18 XL	SW608		92V	8.0J	230	637	630	350	D	C	72/B	
			225/40R18 XL	SW628			92H	8.0J	230	637	630	350	D	C	72/B
			225/40R18 XL	Z-506			92T	8.0J	230	637	630	350	/	/	/
			235/40R18 XL	Z-507			95V	8.5J	241	645	690	350	C	C	72/B
			235/40R18 XL	SW608			95V	8.5J	241	645	690	350	D	C	72/B
			235/40R18 XL	SW618			95V	8.5J	241	645	690	350	D	E	72/B
			235/40R18 XL	Z-506			95T	8.5J	241	645	690	350	/	/	/
			245/40R18 XL	Z-507			97V	8.5J	248	653	730	350	C	C	72/B
			245/40R18 XL	SW608			97V	8.5J	248	653	730	350	C	C	72/B
			245/40R18 XL	SW628			97H	8.5J	248	653	730	350	D	C	72/B
			245/40R18 XL	Z-506			97T	8.5J	248	653	730	350	/	/	/
45er		255/40R18 XL	Z-507			99V	9.0J	260	661	775	350	C	C	73/B	
		255/40R18 XL	SW628			99H	9.0J	260	661	775	350	C	C	73/B	
		215/45R18 XL	Z-507			93V	7.0J	213	651	650	350	C	C	72/B	
		215/45R18 XL	SW628			93V	7.0J	213	651	650	350	D	C	72/B	
		225/45R18 XL	Z-507			95V	7.5J	225	659	690	350	C	C	72/B	
		225/45R18 XL	SW608			95V	7.5J	225	659	690	350	D	C	72/B	
		225/45R18 XL	SW618			95H	7.5J	225	659	690	350	D	E	72/B	
		225/45R18 XL	Z-506			95H	7.5J	225	659	690	350	/	/	/	
		235/45R18 XL	Z-507			98V	8.0J	236	669	750	350	C	C	72/B	
		235/45R18 XL	SW608			98V	8.0J	236	669	750	350	C	C	72/B	
		235/45R18 XL	SW618			98T	8.0J	236	669	750	350	D	E	72/B	
		235/45R18 XL	Z-506			98T	8.0J	236	669	750	350	/	/	/	
		245/45R18 XL	Z-507			100V	8.0J	243	677	800	350	C	C	72/B	
		245/45R18 XL	SW608			100V	8.0J	243	677	800	350	D	C	72/B	
		245/45R18 XL	SW628			100T	8.0J	243	677	800	350	C	C	72/B	
		245/45R18 XL	SW618			100T	8.0J	243	677	800	350	D	E	72/B	
		245/45R18 XL	Z-506			100T	8.0J	243	677	800	350	/	/	/	
		255/45R18 XL	Z-507			103V	8.5J	255	687	875	350	C	C	73/B	
255/45R18 XL	SW628			103H	8.5J	255	687	875	350	C	C	73/B			
50er	215/50R18	Z-507			92V	7.0J	226	673	630	300	C	C	72/B		
	215/50R18	SW628			92H	7.0J	226	673	630	300	D	C	72/B		
	225/50R18 XL	Z-507			99V	7.0J	233	683	775	350	C	C	72/B		
	225/50R18 XL	SW608			99V	7.0J	233	683	775	350	C	C	72/B		
	225/50R18 XL	SW628			99H	7.0J	233	683	775	350	C	C	72/B		
	235/50R18 XL	Z-507			101V	7.5J	245	693	825	350	C	C	72/B		
	235/50R18 XL	SW608			101V	7.5J	245	693	825	350	C	C	72/B		
	235/50R18 XL	SW618			101T	7.5J	245	693	825	350	D	E	72/B		
	235/50R18 XL	Z-506			101T	7.5J	245	693	825	350	/	/	/		
	245/50R18 XL	Z-507			104V	7.5J	253	703	900	350	C	C	72/B		
	245/50R18 XL	SW608			104V	7.5J	253	703	900	350	C	C	72/B		
	245/50R18 XL	SW618			104T	7.5J	253	703	900	350	D	E	72/B		
	55er	215/55R18 XL	Z-507			99V	7.0J	226	693	775	350	C	C	72/B	

WINTER

Rim (inch)	Series	Size	Pattern	LR/PR	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)					
18"	55er	215/55R18 XL	SW618		99H	7.0J	226	693	775	350	D	E	72/B		
		215/55R18 XL	Z-506		99T	7.0J	226	693	775	350	/	/	/		
		225/55R18 XL	Z-507		102V	7.0J	233	705	850	350	C	C	72/B		
		225/55R18	SW618			98H	7.0J	233	705	850	300	D	E	72/B	
		225/55R18 XL	Z-506			102T	7.0J	233	705	850	350	/	/	/	
		235/55R18 XL	Z-507			104V	7.5J	245	715	900	350	B	C	72/B	
		235/55R18 XL	SW618			104T	7.5J	245	715	900	350	D	E	72/B	
		235/55R18 XL	Z-506			104T	7.5J	245	715	900	350	/	/	/	
		255/55R18 XL	Z-507			109V	8.0J	265	737	1030	350	B	C	73/B	
		255/55R18 XL	SW628			109H	8.0J	265	737	1030	350	B	C	73/B	
		255/55R18 XL	Z-506			109T	8.0J	265	737	1030	350	/	/	/	
		60er	225/60R18 XL	Z-507			104V	6.5J	228	727	900	350	C	C	72/B
			225/60R18 XL	SW608			104V	6.5J	228	727	900	350	C	C	72/B
			225/60R18 XL	SW628			104H	6.5J	228	727	900	350	C	C	72/B
			225/60R18 XL	Z-506			104T	6.5J	228	727	900	350	/	/	/
	235/60R18 XL		Z-507			107V	7.0J	240	739	975	350	B	C	72/B	
	235/60R18		SW628			103T	7.0J	240	739	875	300	D	C	72/B	
	235/60R18 XL		Z-506			107T	7.0J	240	739	975	350	/	/	/	
	245/60R18		SW618			105H	7.0J	248	751	925	300	D	E	72/B	
	255/60R18 XL		SW628			112T	7.5J	260	763	1120	350	C	C	73/B	
	265/60R18 XL		SW628			114T	8.0J	272	775	1180	350	B	C	73/B	
	285/60R18		SW628			116T	8.5J	292	799	1250	300	C	C	75/B	
	65er		235/65R18	SW628			106T	7.0J	240	763	950	300	C	C	72/B
			265/65R18	SW628			114T	8.0J	272	801	1180	300	C	C	73/B
			LT275/65R18	SW606	E/10PR		123/120Q	8.0J	282	810	1550/1400	550	/	/	/
			70er	LT275/70R18	SW606	E/10PR		125/122Q	8.0J	270	837	1650/1500	550	/	/
		35er		225/35R19 XL	Z-507		88V	8.0J	230	641	560	350	C	C	72/B
				225/35R19 XL	SW608			88V	8.0J	230	641	560	350	D	C
	235/35R19 XL		Z-507			91V	8.5J	241	647	615	350	C	C	72/B	
	255/35R19 XL		Z-507			96V	9.0J	260	661	710	350	C	C	73/B	
255/35R19 XL	Z-506				96T	9.0J	260	661	710	350	/	/	/		
275/35R19 XL	SW628				100H	9.5J	278	675	800	350	C	C	73/B		
40er	275/35R19 XL	Z-506			100T	9.5J	278	675	800	350	/	/	/		
	225/40R19 XL	Z-507			93V	8.0J	230	663	650	350	C	C	72/B		
	225/40R19 XL	Z-506			93H	8.0J	230	663	630	350	/	/	/		
	235/40R19 XL	Z-507			96V	8.5J	241	671	710	350	C	C	72/B		
	245/40R19 XL	Z-507			98V	8.5J	248	679	750	350	C	C	72/B		
	245/40R19 XL	SW628			98H	8.5J	248	679	750	350	C	C	72/B		
	245/40R19 XL	Z-506			98T	8.5J	248	679	730	350	/	/	/		
	255/40R19 XL	Z-507			100V	9.0J	260	687	800	350	C	C	73/B		
	255/40R19 XL	SW628			100H	9.0J	260	687	800	350	C	C	73/B		
	27														

WINTER


Rim (inch)	Series	Size	Pattern	LR/PR	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	3PMSF	Wet Grip	Noise
19"	55er	255/55R19 XL	Z-507		111H	8.0J	265	763	1090	350	B	C	72/B
		255/55R19 XL	SW618		111H	8.0J	265	763	1090	350	D	E	73/B
		275/55R19	SW628		111T	8.5J	284	785	1090	300	C	C	73/B
	60er	235/60R19 XL	SW628		107T	7.0J	240	765	975	350	C	C	72/B
		255/60R19 XL	SW628		113T	7.5J	260	789	1150	350	C	C	73/B
20"	30er	245/30R20 XL	SW608		90V	8.5J	248	656	600	350	D	C	72/B
		275/30R20 XL	SW618		97H	9.5J	278	674	730	350	D	E	73/B
	35er	315/35R20 XL	SW628		110H	11.0J	320	728	1060	350	C	C	75/B
		315/35R20 XL	Z-506		110T	11J	320	728	1060	350	/	/	/
	40er	255/40R20 XL	SW628		101H	9.0J	260	712	825	350	C	C	73/B
		275/40R20 XL	Z-507		106V	9.5J	278	728	950	350	B	C	73/B
		275/40R20 XL	SW628		106H	9.5J	278	728	950	350	C	C	73/B
		275/40R20 XL	Z-506		106T	9.5J	278	728	950	350	/	/	/
	45er	285/40R20	SW628		104H	10.0J	290	736	900	300	C	C	75/B
		235/45R20 XL	SW628		100H	8.0J	236	720	800	350	D	C	72/B
		245/45R20 XL	SW628		103H	8.0J	243	728	875	350	C	C	72/B
		255/45R20 XL	Z-507		105V	8.5J	255	738	925	350	B	C	72/B
		255/45R20 XL	SW628		105H	8.5J	255	738	925	350	C	C	73/B
		275/45R20 XL	Z-507		110V	9.0J	273	756	1060	350	B	C	73/B
	50er	275/45R20 XL	SW618		110H	9.0J	273	756	1060	350	D	E	73/B
		235/50R20 XL	SW628		104H	7.5J	245	744	900	350	C	C	72/B
		245/50R20	SW628		102H	7.5J	253	754	850	300	C	C	72/B
		255/50R20 XL	SW618		109H	8.0J	265	764	1030	350	D	E	73/B
265/50R20 XL		SW628		111H	8.5J	277	774	1090	350	B	C	73/B	
275/50R20 XL		SW628		113H	8.5J	284	784	1150	350	B	C	73/B	
55er	285/50R20 XL	SW628		116H	9.0J	297	794	1250	350	B	C	75/B	
	235/55R20 XL	SW628		105H	7.5J	245	766	925	350	C	C	72/B	
	255/55R20 XL	SW628		110H	8.0J	265	788	1060	350	B	C	73/B	
	275/55R20 XL	SW628		117H	8.5J	284	810	1285	350	B	C	73/B	
	275/55R20 XL	Z-506		117T	8.5J	284	810	1285	350	/	/	/	
	275/55R20 XL	Z-506		115T	8.0J	279	838	1215	320	/	/	/	
21"	35er	315/35R21 XL	SW628		111H	11.0J	320	753	1090	350	B	C	75/B
	40er	295/40R21 XL	SW628		111H	10.5J	301	769	1090	350	C	C	75/B
	45er	255/45R21	SW628		102H	8.5J	255	763	850	300	D	C	73/B
		265/45R21	SW628		104H	9.0J	266	771	900	300	C	C	73/B
275/45R21 XL		SW628		110H	9.0J	273	781	1160	350	C	C	73/B	
50er	275/50R21 XL	SW628		113H	8.5J	284	809	1150	350	B	C	73/B	
22"	40er	265/40R22 XL	SW628		106H	9.5J	271	771	950	350	C	C	73/B

TRAILER

Rim (inch)	Series	Size	Pattern	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	3PMSF	Wet Grip	Noise
10"	55er	195/55R10C	ST290	98/96N	6.00I	201	468	750/710	625	C	C	72/B
12"	60er	185/60R12C	ST290	104/101N	5 1/2J	159	527	900/825	650	C	C	72/B
		195/60R12C	ST290	104/102N	6J	202	539	900/850	650	C	C	72/B
70er	155/70R12C	ST290	104/102N	4 1/2J	157	523	900/850	625	C	C	72/B	
	195/50R13C	ST290	104/101N	6J	201	526	900/825	650	C	C	72/B	
13"	70er	155/70R13	ST290	75N	4.50B	157	548	387	300	C	C	70/B
		165/70R13	ST290	79N	5.00B	170	562	437	300	C	C	70/B
		175/70R13	ST290	86N	5.00B	177	576	530	340	C	C	70/B
	80er	185/70R13	ST290	86N	5 1/2J	189	590	530	300	C	C	70/B
		135/80R13	ST290	74N	3.50B	133	546	375	340	D	C	70/B
		145/80R13	ST290	79N	4.00B	145	562	437	340	C	C	70/B
14"	70er	155/80R13	ST290	84N	4.50B	157	578	500	340	C	C	70/B
		155R13C	ST290	90/88N	4.50B	157	578	615/580	450	C	C	72/B
	80er	165R13C	ST290	94/92N	4.50B	163	594	670/630	450	C	C	72/B
		195/70R14	ST290	96N	6J	201	630	710	340	C	C	70/B
80er	185R14C	ST290	104/102N	5 1/2J	188	650	900/850	500	C	C	72/B	
	195R14C	ST290	106/104N	5 1/2J	198	666	950/900	450	C	C	72/B	

INTRODUCING THE NEW EU TYRE LABEL

Lowering car emissions with EU tyre labels

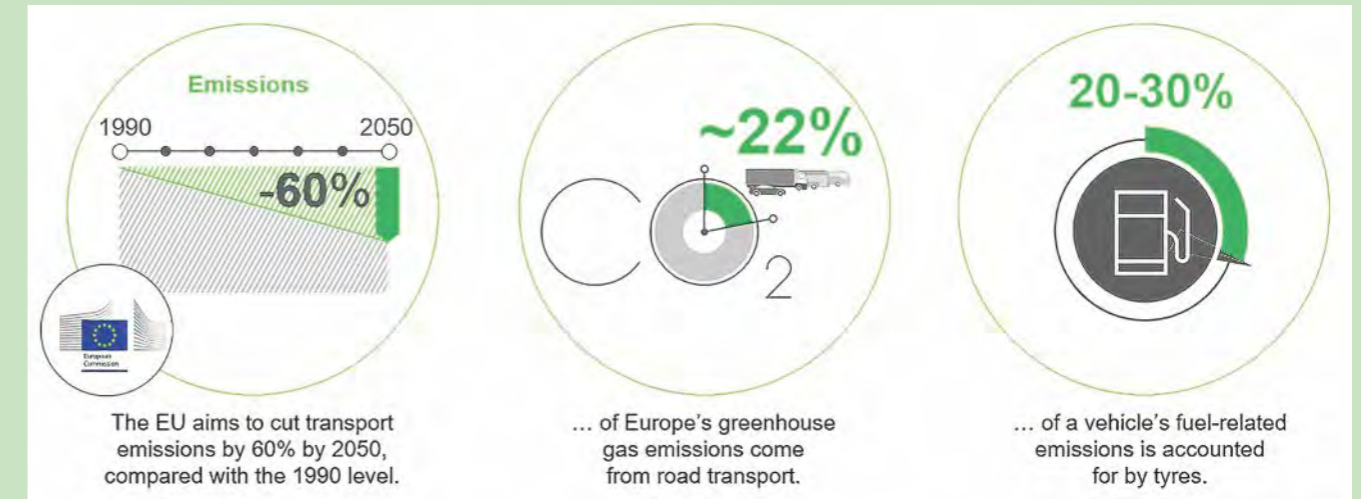

The EU has committed to cutting its greenhouse gas emissions to reach climate neutrality by 2050. Reducing CO₂ emissions from road transport plays a major part in fulfilling these goals.

Choosing more fuel-efficient tyres can contribute to reducing transport emissions. In order to help consumers make informed decisions, the EU is introducing a new labelling scheme for tyres which will come into force on May 1, 2021.

The EU tyre label will allow EU consumers to choose more fuel-efficient tyres, which can lead to great savings for both end users and commercial users in terms of both costs and emissions. Road safety is improved through better wet grip while information on noise levels help reduce traffic-related noise pollution.

The New EU Tyre Label

- Under the **new regulation**, bus and truck tyres will also be covered (tyre class C1, C2, C3).
- Additional information (tyre type identifier = art. no.).
- In addition to the standard label, there are also options for including icons relating to **severe snow conditions** (3PMSF) and/or grip in icy conditions (for C1 tyres only).
- Noise classes:** ABC replace sound waves.
- Reclassification for lower label classes:** D is the new E; Class D no longer empty (for C1 & C2 tyres only); F and G merge to form E.
- QR code** for each tyre type identifier with link to EU product database (EPREL).

ENERG

SUPPLIER'S NAME MODEL IDENTIFIER

Size Tyre class


A B C D E

A B C D E


72dB ABC

2020/740

TYRE SIZE KNOWLEDGE

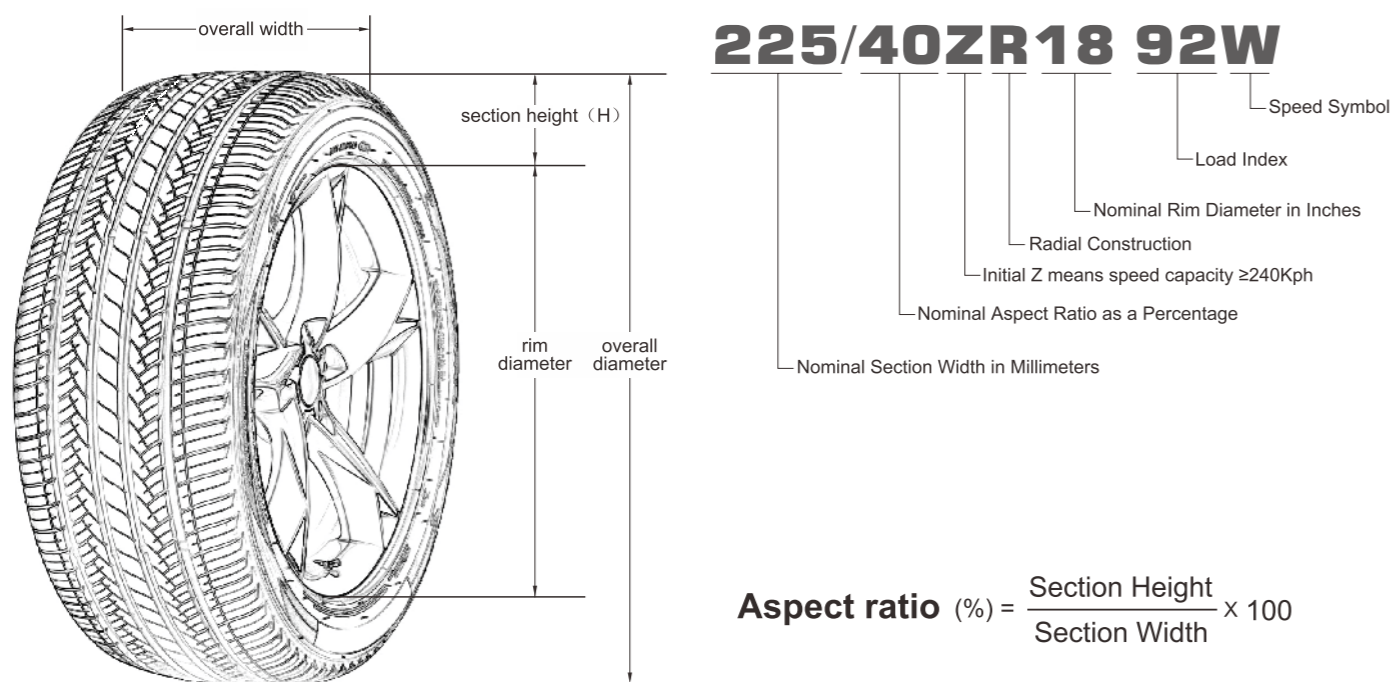

SIDEWALL INSTRUCTION

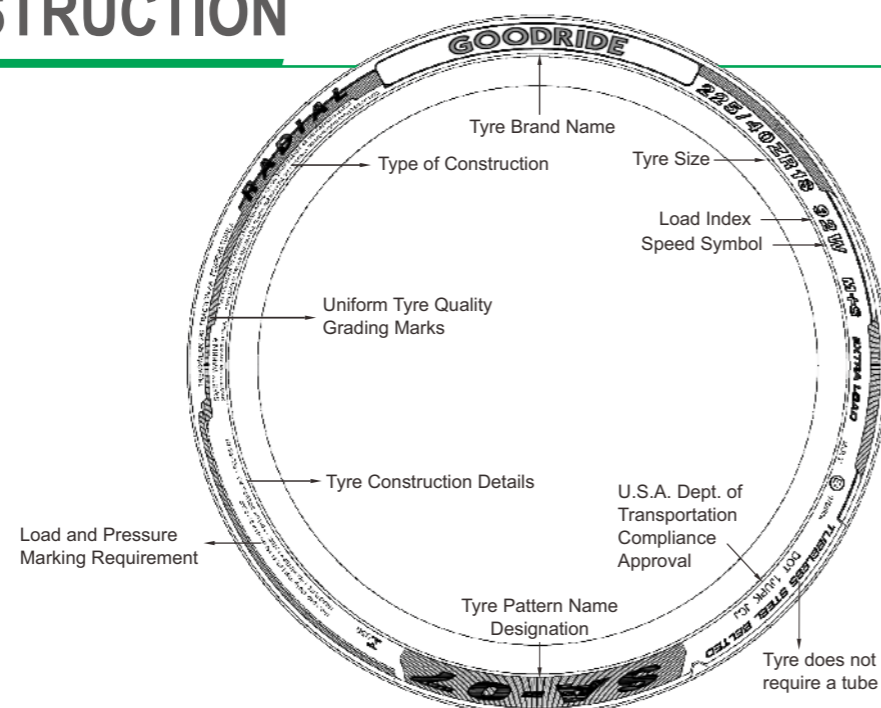

OTHER MARKINGS

- P** as part of the tyre size designation (e.g., P205/65R15) used to indicate tyres intended for services on passenger cars.
- LT** as part of the size designation (e.g., LT235/75R15) used to indicate the tyres are intended for light truck vehicles.
- M&S** letters used to indicate a tyre suitable for Mud and Snow and/or All Season usage.
- XL** as part of the size designation (e.g., P235/75R16 XL) used to indicate the tyre can carry more loads as the maximum inflation pressure and load are greater than a standard load version. (Also could be called REINFORCED or RF).
- ZR** as part of the tyre size designation (e.g. 225/45ZR17 XL) used to indicate the tyre has a maximum speed over 240 kilometer per hour.

TYRE UPGRADE


"Tyre Upgrade" means: increase of rim diameter without changing of tyre overall diameter, the trend in development of low aspect ratio is called upgrade.

INCREASE OF SPORTY PERFORMANCE

The tyre response will be more sensitive when you turn the steering wheel that the flex of tyre will be reduced, and the performance of steering and handling stability will be better, especially under medium and high speed driving.

ENHANCEMENT OF BRAKING ABILITY

The braking stability will be improved due to the decrease of tyre flex when you brake.

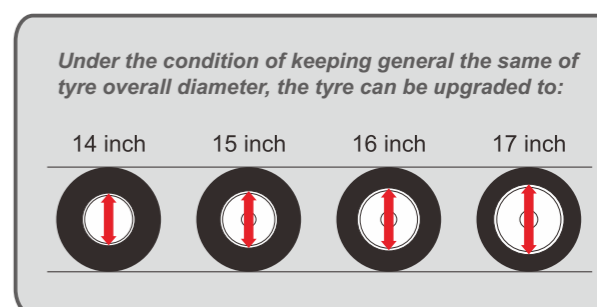

Please refer to the clarifications set forth below to upgrade the tyre:

- Without any particular reason, please do not change the overall diameter of tyre easily. The alternation of tyre overall diameter will cause misreading of speedometer or mutual interference between tyre and other parts of vehicle.
- Please determine the width of tyre in accordance with the specific width of vehicle. If the width of the entire tyre is increased overly, it will cause mutual interference between tyre and other parts of vehicle, even heading out of the tyre from bodywork which will initiate danger.
- Notice the load index of vehicle when you upgrade the tyre. There is rule to the weight which the tyre can bear (load index) for each size. Please refer to the load index when you chose the proper size.

TYRE ROTATION AND INFLATION


TYRE ROTATION

The purpose for rotating tyres is to achieve a more uniform wear for all tyres on a vehicle. Before rotating tyres, determine the cause of any unusual wear and correct any misalignment, imbalance, or other mechanical problems.

Otherwise it will cause: **1.** Ride disturbing; **2.** More noise; **3.** Poor ride comfort; **4.** Shorter of life span.

Note: it is suggested that tyres should be transposed as soon as the phenomena above mentioned are detected (especially the two front wheels).

The tyre transposition patterns are acceptable below. Please refer to your vehicle owner’s manual regarding tyre transposition advice.

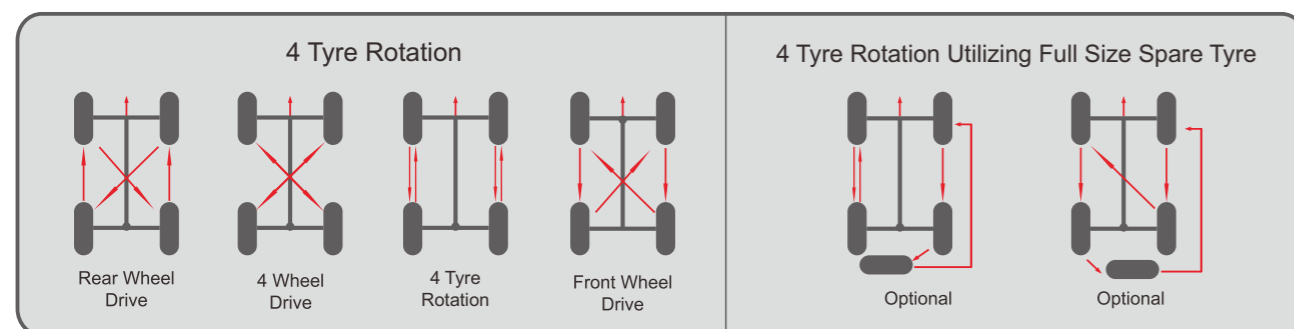

TYRE INFLATION

One of the most important aspects of tyre maintenance is proper inflation.

Sufficient inflation is needed to carry the load and avoid damage. Driving with improper inflation (particularly grossly under inflated or over inflated tyres) is dangerous and can cause critical damage or sudden failure of the tyre(s). Proper inflation should be maintained and check on at least weekly bases and before long distance drives.

Proper inflation should be maintained and checked at least once a week and before a long distance drive.

It is also advisable to take into account axle load and driving conditions when setting inflation pressure. Compensation for heavier loads can be made by increasing inflation pressure, but do not exceed maximum inflation for the tyre or maximum axle load.

In the space of just one month, a tyre can lose 10 pounds of air pressure.

It is important to check your air pressure regularly, to make sure your tyres are neither under nor over inflated.

Under-inflation

Is the worst enemy your tyre can have. It causes increased treadwear on the outside edges (or shoulders)of the tyre. It

also generates excessive heat, which reduces tyre durability. Finally it reduces your fuel economy by increasing rolling resistance-soft tyres make your vehicle work harder.

Over-inflation

Is also detrimental to the tyre. Too much air pressure causes the center of the tread to bear the majority of the truck’s weight, which leads to faster deterioration and uneven wear. Any kind of uneven wear will shorten the lifespan of your tyres.


MOUNTING PROCEDURE

There is extreme danger in attempting to install a tyre of one rim diameter on a rim of a different rim diameter.

Always replace a tyre on a rim with another tyre of exactly the same diameter tyre designation and suffix letters.

For example, a 16" tyre goes with a 16" rim. Never mount a 16" size diameter tyre on a 16.5" rim. While it is possible to pass a 16" diameter tyre over the lip or flange of a 16.5" size diameter rim, it cannot be inflated enough to position itself against the rim flange. If an attempt is made to seat the tyre bead by inflating, the tyre bead may break with explosive force and could cause serious bodily injury or death.

Rims of different diameters and tapers cannot be interchanged. The top right diagrams illustrate the difference between rims of two different tapers and diameters.

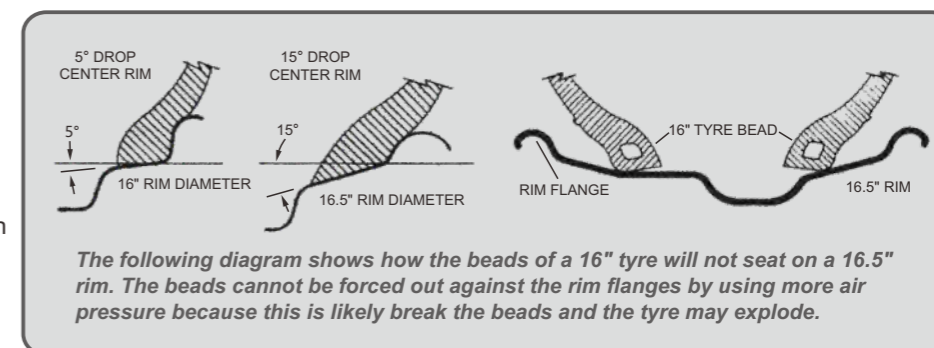

The following diagram shows how the beads of a 16" tyre will not seat on a 16.5" rim. The beads cannot be forced out against the rim flanges by using more air pressure because this is likely break the beads and the tyre may explode.

FOR YOUR SAFETY AND COMFORT

Any tyre, no matter how well constructed, may fail in use as a result of punctures, impact damage, improper inflation or other conditions resulting from use.

Tyre failure may create risk of property damage or personal injury. To reduce the risk of tyre failure and for your safety and comfort, we strongly recommend the following:

- Never mount a tyre on a rim that is damaged or which has been repaired by welding or brazing.

- Never inflate beyond 275 kPa (2.75bar, 40psi) to seat beads.
- Tyre inflation should be done in a safety cage.
- Do not mix different tyre size designations or construction on the same axle, except for limited use of temporary spare tyres.
- Outer diameter of wheel should be the same as inner diameter of tyre.
- Make sure to follow instructions in the car owner's manual or on the vehicle tyre information placard in the car to maintain proper tyre pressure (Particularly driving on highway and/or when carrying heavy loads).
- Never bleed or reduce air pressure when tyres are hot from driving.
- Over- or under-inflation pressure (including spare tyre) at least once a month and before every long trip.
- Stones, gravel and other outer objects stuck in the tyre treads may damage the tyre. Remove outer objects from the tyre treads.
- Tyre should only be mounted by professionally trained persons.
- Objects in the road such as potholes, glass, metal, rocks, wood debris, curbstones and such, which could damage a tyre should be safely avoided.
- To preserve traffic safety and tyre life, ZC rubber recommends driving safely and avoiding hard acceleration, braking or cornering in unnecessary situations.
- If you feel the car is unstable or feel any unusual noises or vibrations, stop your car in safe place and inspect your tyres. Even if no visible defects are found, drive slowly and ask your dealer to inspect your tyres as soon as possible.
- Winter tyres (studless, stud or snow tyres) should not be mixed with other types of tyres.
- New winter tyre should not be driven over 80km/h for the first 100km.
- When driving on winter roads, sudden starts and quick stops should be avoided and a safe car-to-car driving distance should be maintained.
- When using tyre chains be sure to use the proper size chains and affix with priority to the drive axle.
- Avoid driving with tyre chains for long distance on roads with no packed snow or ice.

Never use a tyre under the following conditions and replace tyres immediately:

- If the tread has worn to the tread wear indicator.
- If breaks in the fabric appear.
- If cords or wires are exposed.

Storage of steel belted radial tyres:

- Keep your tyres away from direct sunlight and locations with high temperature, high moisture, heavy electrical machinery, welders etc.
- Tyres should be preferably stored in a cool, dry, and dark room with controlled environment.

To preserve traffic safety, ZC rubber recommends driving substantially slower under adverse weather or road conditions.

ROUTINE MAINTENANCE

- Each month the tyre pressure should be checked one time at least when the tyre is cool, too much or less of the pressure will cause damage to tyre.
- Please take a 15-minutes break after driving on expressway for two hours.
- Please ensure that there are no nails, metal pieces, glass or other foreign materials.
- Please ensure that there is no damage such as separation, distortion and distinct rusting which will cause air leakage.
- Please transpose the tyres regularly (approximately 5000 km) in accordance with abrasion conditions for the sake of expanding its life span and preventing eccentric wear.
- No tyre brightener.

THE INVENTORY OF STEEL-CORD RADIAL TYRE

The tyre should be placed in dry interior.

Note: In order to ensure the driving safety, we suggest that please decrease the speed while driving under atrocious weather and poor terrain condition.

SPEED RATING

The speed symbol refers to the maximum speed capabilities of the tyre. It is only valid for tyres that are properly inflated and loaded within their assigned load index.

Speed Rating	L	N	P	Q	R	S	T	U	H	V	W	Y	ZR
Max. Kph. (Kilometer/hour)	120	140	150	160	170	180	190	200	210	240	270	300	≥240

LOAD INDEX

The load index is the maximum load-carrying capacity of a tyre under a specific condition.

Load Index	KG	LBS	Load Index	KG	LBS	Load Index	KG	LBS	Load Index	KG	LBS	Load Index	KG	LBS
50	190	420	70	335	740	90	600	1320	110	1060	2340	130	1900	4180
51	195	430	71	345	760	91	615	1360	111	1090	2400	131	1950	4300
52	200	440	72	355	785	92	630	1390	112	1120	2470	132	2000	4400
53	206	455	73	365	805	93	650	1430	113	1150	2540	133	2060	4540
54	212	465	74	375	825	94	670	1480	114	1180	2600	134	2120	4680
55	218	480	75	387	855	95	690	1520	115	1215	2680	135	2180	4800
56	224	495	76	400	880	96	710	1570	116	1250	2760	136	2240	4940
57	230	505	77	412	910	97	730	1610	117	1285	2830	137	2300	5080
58	236	520	78	425	935	98	750	1650	118	1320	2910	138	2360	5200
59	243	535	79	437	965	99	775	1710	119	1360	3000	139	2430	5360
60	250	550	80	450	990	100	800	1760	120	1400	3080	140	2500	5520
61	257	565	81	462	1020	101	825	1820	121	1450	3200	141	2575	5680
62	265	585	82	475	1050	102	850	1870	122	1500	3300	142	2650	5840
63	272	600	83	487	1070	103	875	1930	123	1550	3420	143	2725	6000
64	280	615	84	500	1100	104	900	1980	124	1600	3520	144	2800	6150
65	290	640	85	515	1140	105	925	2040	125	1650	3640	145	2900	6400
66	300	660	86	530	1170	106	950	2090	126	1700	3740	146	3000	6600
67	307	675	87	545	1200	107	975	2150	127	1750	3860	147	3075	6800
68	315	695	88	560	1230	108	1000	2200	128	1800	3960	148	3150	6950
69	325	715	89	580	1280	109	1030	2270	129	1850	4080	149	3250	7150

GOODRIDE



www.goodridetire.com



www.facebook.com/goodridetireglobal



ZHONGCE RUBBER GROUP CO., LTD.



www.zc-rubber.com



www.facebook.com/zcrubber



www.twitter.com/zc_rubber



www.linkedin.com/company/zcrubber